



1. Test:

1. 100% short circuit, open circuit and dislocation test;
2. conduction impedance: 3ω (Max)
3. field measurement: A.) field measurement C correct reverse identification hard disk
B.) Whether the measured disk transmission speed reaches USB3.1, The read/write data must be at least 300MB/S





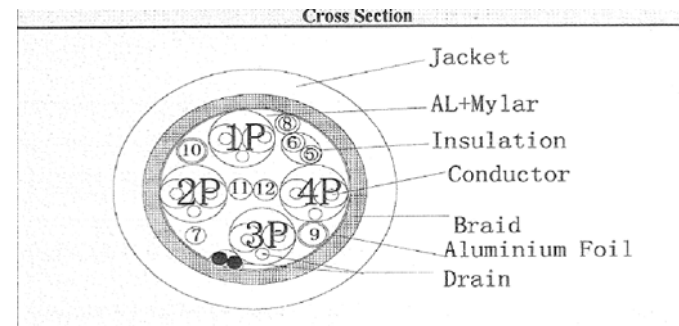


⑩	Wire clip 30+32+26+34AWG	2	pcs
⑨	High temperature adhesive tape	0.07	M
⑧	Double conductive copper foil	0.08	M
⑦	USB TYPE C on Meta Can	2	pcs
⑥	USB TYPE C Under the Meta Can	2	pcs
⑤	45P Black PVC	12	g
④	Low pressure forming material ~	1	g
③	USB 3.1 C Type Connector PCB+SMT+10NF Capacitance Nickel plating	1	pcs
②	3.1 C Type Connector PCB+SMT+10NF Capacitance+IC Nickel plating	1	pcs
①	USB3.1 [30AWG (7/0.1TC)+EAM]*4P+[31AWG (7/0.08TC)+EA]*1P+26AWG (7/0.16TC)*2C+[34AWG (7/0.06TC)+A]*3C +34AWG (7/0.06TC)*1C+A2EB (24/11/0.06TC 85%) OD:5.2MM black	2.01	M
NO	ITEM DESCRIPTION	Q'TY	UNIT

REV.	ECN NO	DESCRIPTION	DATE	NAME		
	TOLERANCE					
	INCHES				M/M	
	.X	.015			.30	
	.XX	.010	.10	TITLE:		
	.XXX	.005	.05	USB3.1 CM TO CM(E-Mark) 5G 3A L=2M		
DRAWN BY	Shijie	CUSTOMER :				
CHECK BY		CUSTOMER P/N :	AC7402			
APPD BY		SCALE	NONE	DRAWING NO.:		
		UNIT	MM		REV. AO	
		DATE	2021.11.15	1/3		

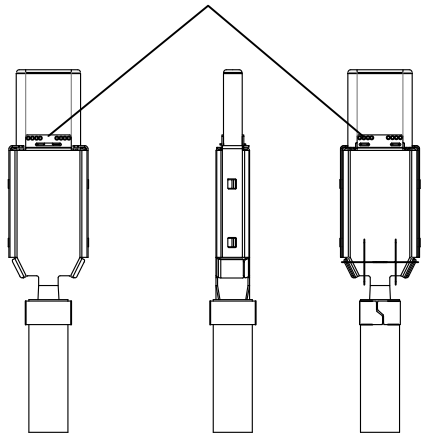

4、Pin Assignment:

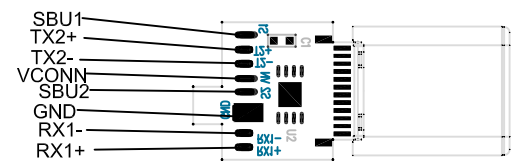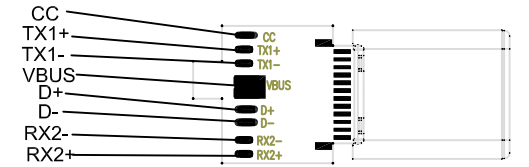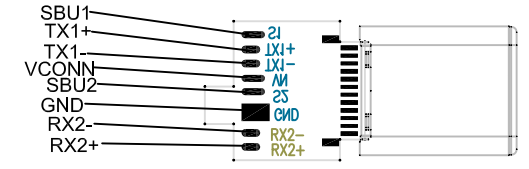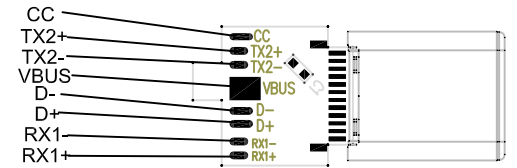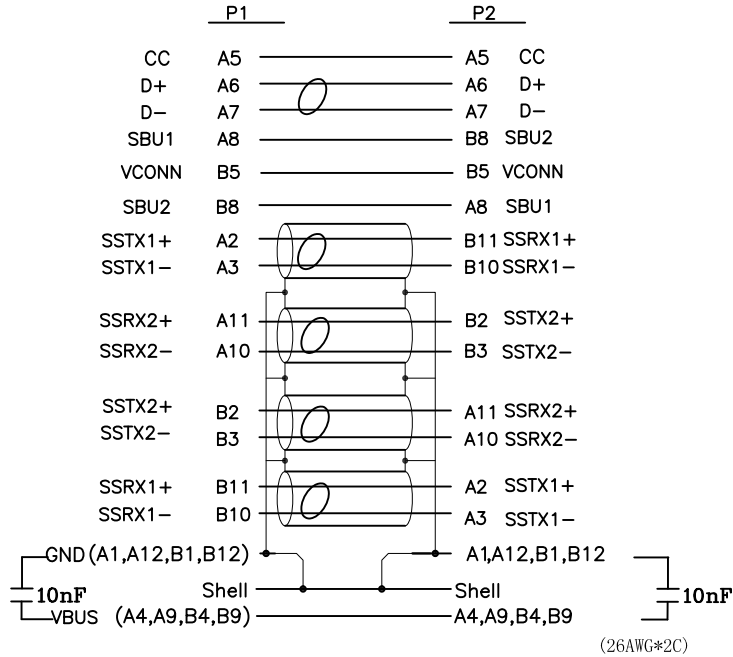

REV.	ECN NO	DESCRIPTION	DATE	NAME	
TOLERANCE		TITLE: USB3.1 CM TO CM(E-Mark) 5G 3A L=2M			
INCHES					
M/M					
.X	.015	.30	CUSTOMER : CUSTOMER P/N : AC7402		
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY	Shijie	SCALE	NONE	DRAWING NO.:	REV. A01
CHECK BY		UNIT	MM		
APPD BY		DATE	2021.11.15		2/3

NO	ITEM	DESCRIPTION	Q'TY	UNIT