






MOLDING: SF-31
SF-300

DATE	REV.	REVISION	DRAFTING	CHECKED
2020/11/6	A/0	Initial	Andy	
2021/05/26	A/1	Add RAL NO.	Carrie	




B
2:1

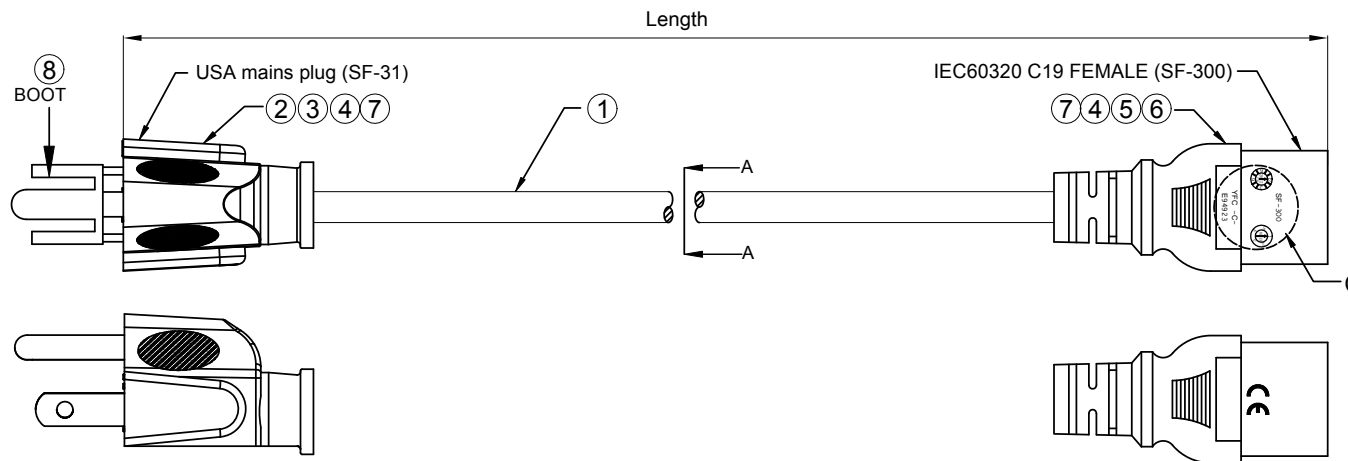

C
2:1

WIRE MARKING(NO.08):(UL) E135710-F3 SJT 3X16AWG 60℃ 300V VW-1 CSA
LL95737 SJT 3X1.31mm2(16AWG) 60℃ 300V FT2 YFC-BONEAGLE

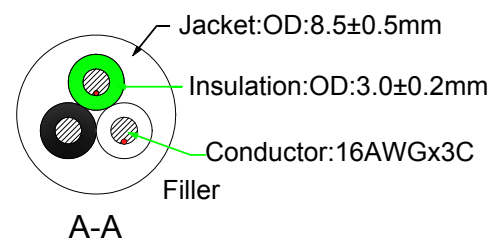

Item	Color	RAL NO. (similar to)	Length
AK5445	Black	RAL9011	1800±20

PINOUT		
SF-31	WIRE	SF-300
E	GREEN	E
L	BLACK	L
N	WHITE	N

Polarity and Conduction and Penetration Test	
Dielectric Voltage Withstand Test : 1500V / 1 Sec	
Electrical Performance (20℃)	
Item	Parameter
Conductor Resistance	≤ 14.3Ω/1000m
Voltage Rating	AC 300V

⑧	Dust cover	Black dust cover	1PC
⑦	Molding	Black 40P PVC	AR
⑥	Bracket	European standard IEC320 C-19 three PIN(SF-300)inner frame,Black	1PC
⑤	Terminal	SF-300 European standard IEC320(C-19)three hole female terminal,matching 14-18AWG wire	3PCS
④	Bracket	5-15P three PIN 90° inner frame,Black PC material.	1PC
③	Terminal	American standard 6.3 single sheet of non-polar,carrying-current terminal,matching 18-16# plated nickel	2PCS
②	Terminal	American standard 4.75 round tube ground wire male terminal,matching 18-16AWG wire,plated nickel	1PCS
①	CABLE	SJT 16AWGx3C 60℃ PVC BK	AR

Unless specified on the drawing, tolerances are per the follows:
X. ±0.20 X° ±3
.X ±0.10 .X° ±0.3
.XX ±0.05

DRAW. NO		YFAC-S200036		TITLE		SJT 16AWGx3C 60℃ SF-31 TO SF-300 Black CABLE ASS'Y	
CUSTOMER		ACT		DRAW		Carrie	DATE
CUST' R P/N		AK5445		CHECK		DATE	2021.05.26
SCALE		NONE		UNIT		mm	1 of 1

No.	TITLE	DESCRIPTION			Q'TY
Cable Spec NO.	/	Part Number	--	Note	

<input checked="" type="checkbox"/> RoHS2.0	<input type="checkbox"/> Reach	<input type="checkbox"/> GP	<input type="checkbox"/> HF	<input type="checkbox"/> Other
---	--------------------------------	-----------------------------	-----------------------------	--------------------------------

