



CUSTOMER NAME
CUSTOMER Part No.


DATE	REV	DESCRIPTION	BY
2013. 01. 03	A/0		

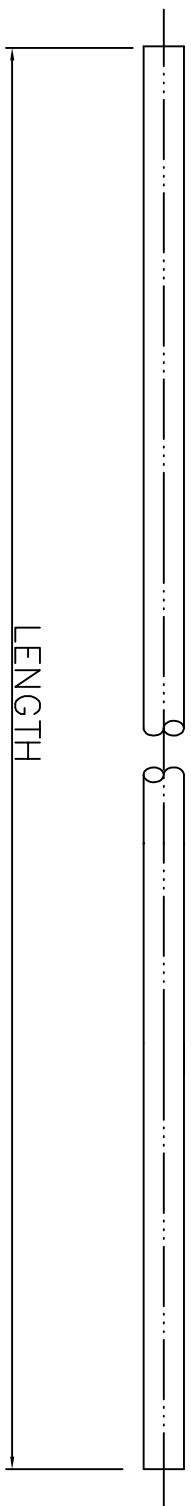

MARKING: ACT CATEGORY 6A SSTP PATCH CABLE 3P VERIFIED TO ISO/IEC 11801 ED.2 & (FP0408) ANSI/TIA-568-C.2 & IEC 60332-1-2 ▲ 26AWGX4P CMX(UL) c(UL) CMH E164469-F3 15000.001

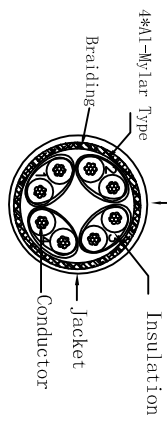

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown



Conductor	Bare Copper 26AWG
Insulation	Thickness: MIN at any point:0.2mm MAX AVG:0.35mm
	Diameter: 1.05±0.06mm
Jacket	Thickness: MIN at any point:0.50mm MAX AVG:0.60mm
	Diameter: 5.8±0.2mm

Wire	CAT. 6A SSTP STR 26AWGX4P
Length	305M
Color=YY	Grey (RAL7045)

PAGE	1/1
Key Size	Δ
ROHS COMPLIANT	
Unless specified on the drawing, tolerances are per the follows: .X ± 0.5 .X ± 0.1 .XX ± 0.05	
3RD	

ACT	Part No.	FP700B		
	Description	CAT. 6A SSTP STR 26AWGX4P		
	DEP.	R&D	APPROVAL	CHECKER
	SCALE			
UNIT	mm			
				DRAW
				DHY