



1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE		REV	
CUSTOMER Part No.						2013.09.26		A/0	
								DESCRIPTION	
								NEW	
								BY	
								Vinci	

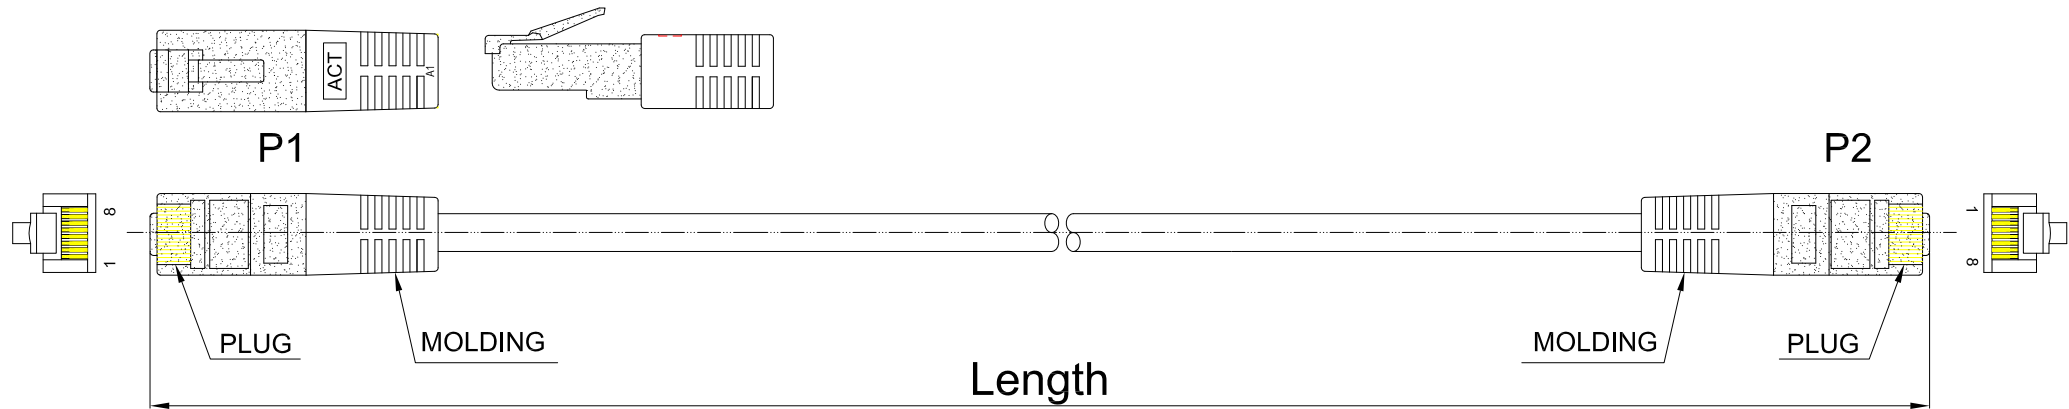

Marking: CAT.6A UTP LSOH 24AWGX4P PATCH CONFORM TO ANSI/TIA-568-C.2 & IEC 60332-1-2

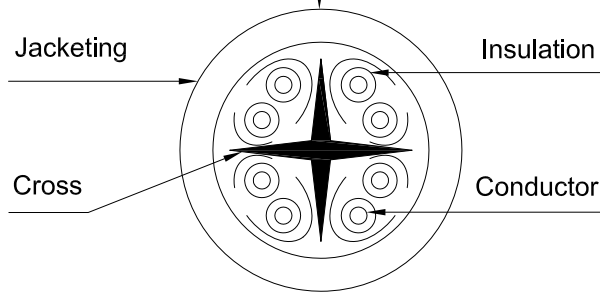

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 24AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:1.03±0.06mm
Jacket	LSOH Thickness:MIN at any point:0.55mm MAX AVG:0.65mm Diameter:7.5±0.2mm
Wire	CAT.6A UTP STR 24AWGX4P
Plug	YU-43 8P8C 50u"

Key Size		3RD	
Length (mm)	Tolerance		
	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	
350-1000	±0.40	±0.65	±2.0



Part No.	IB10XX, IB11XX, IB12XX, IB13XX, IB14XX, IB19XX, IB35XX			
Description	CAT.6A UTP STR 24AWGX4P LSOH YU-43 L-690			
UNIT	mm	APPROVAL	CHECKER	DRAWER
PAGE	1/2			Vinci
Draw.No.				

1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2013.09.26	A/0	NEW	Vinci

Part No.	Color	Length	Part No.	Color	Length	Part No.	Color	Length	Part No.	Color	Length	
IB1052	IVORY	250±30mm	IB1200	RED	500±30mm	IB1400	GREEN	500±30mm	IB3500	BLACK	500±30mm	
IB1000		500±30mm	IB1201		1000±30mm	IB1401		1000±30mm	IB3501		1000±30mm	
IB1001		1000±30mm	IB1251		1500±30mm	IB1451		1500±30mm	IB3551		1500±30mm	
IB1051		1500±30mm	IB1202		2000±30mm	IB1402		2000±30mm	IB3502		2000±30mm	
IB1002		2000±30mm	IB1203		3000±50mm	IB1403		3000±50mm	IB3503		3000±50mm	
IB1003		3000±50mm	IB1205		5000±50mm	IB1405		5000±50mm	IB3505		5000±50mm	
IB1005		5000±50mm	IB1207		7000±150mm	IB1407		7000±150mm	IB3507		7000±150mm	
IB1007		7000±150mm	IB1210		10000±150mm	IB1410		10000±150mm	IB3510		10000±150mm	
IB1010		10000±150mm	IB1300		500±30mm	IB1900		500±30mm	Part No.		Color	RAL NO.
IB1015		15000±150mm	IB1301		1000±30mm	IB1901		1000±30mm	IB10XX		IVORY	RAL 1015
IB1020	20000±150mm	IB1351	1500±30mm	IB1951	1500±30mm	IB11XX	GREY	RAL 7045				
IB1152	GREY	250±30mm	IB1302	BLUE	2000±30mm	IB1902	YELLOW	2000±30mm	IB12XX	RED	RAL 3018	
IB1100		500±30mm	IB1303		3000±50mm	IB1903		3000±50mm	IB13XX	BLUE	RAL 5012	
IB1101		1000±30mm	IB1305		5000±50mm	IB1905		5000±50mm	IB14XX	GREEN	RAL 6018	
IB1151		1500±30mm	IB1307		7000±150mm	IB1907		7000±150mm	IB19XX	YELLOW	RAL 1018	
IB1102		2000±30mm	IB1310		10000±150mm	IB1910		10000±150mm	IB35XX	BLACK	RAL 9011	
IB1103		3000±50mm										
IB1105		5000±50mm										
IB1107		7000±150mm										
IB1110		10000±150mm										
IB1115		15000±150mm										
IB1120	20000±150mm											

Key Size		3RD			Part No.	IB10XX, IB11XX, IB12XX, IB13XX, IB14XX, IB19XX, IB35XX				
Length (mm)	Tolerance				Description	CAT.6A UTP STR 24AWGX4P LSOH YU-43 L-690				
0-15	±0.05	±0.10	±1.0	UNIT	mm	APPROVAL	CHECKER	DRAWER		
15-60	±0.10	±0.20		PAGE	2/2			Vinci		
60-150	±0.15	±0.35	±1.5	Draw.No.						
150-350	±0.20	±0.50								
350-1000	±0.40	±0.65	±2.0							