
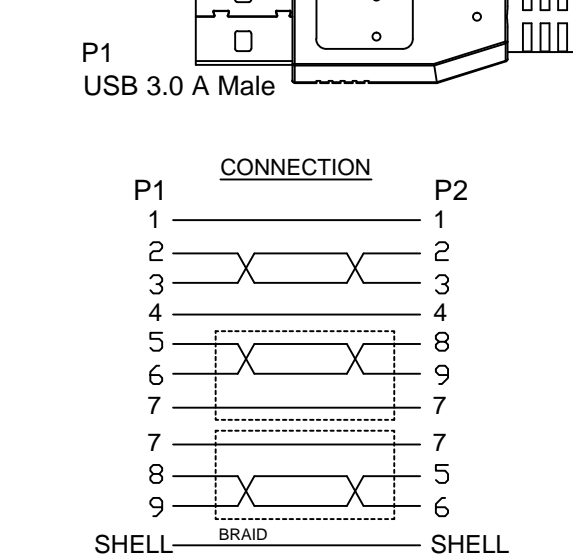


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/04/28	

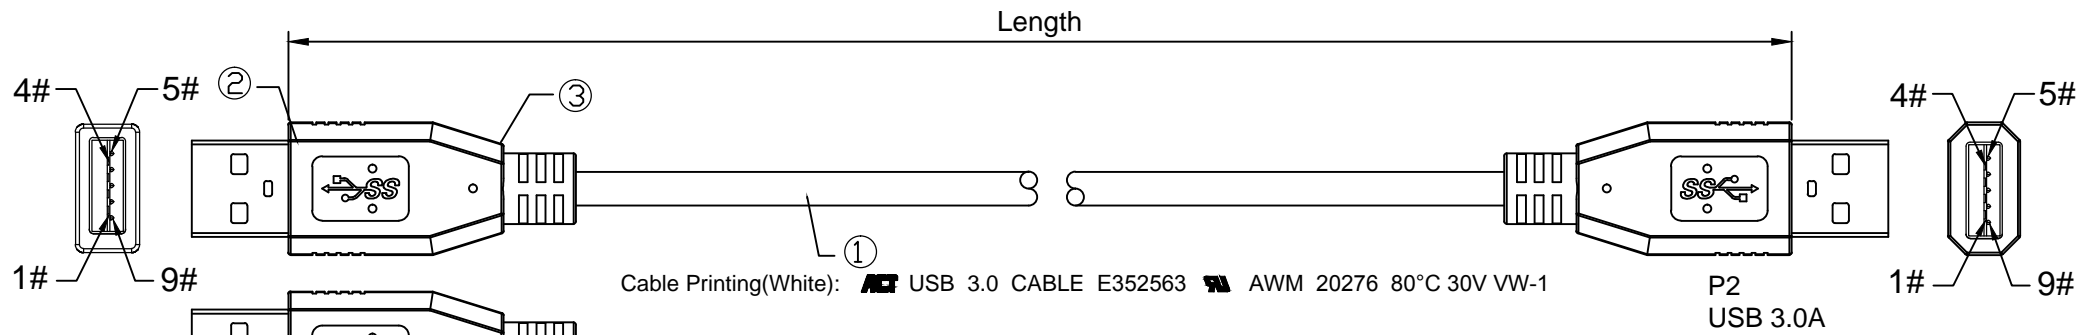


- A) Conductor 7/0.12BC(28AWG)
 - B) Insulation FPE 0.75mm(White/Blue)
 - C) Conductor 7/0.12BC(28AWG)
 - D) Al-foil
 - E) Mylar
 - F) Conductor 7/0.12BC(28AWG)
 - G) Insulation HDPE 0.72mm(White/Green)
 - H) Conductor 17/0.16BC(22AWG)
 - I) Insulation PVC 1.3mm(Red/Black)
 - J) Al Foil
 - K) Drain wire 7/0.12BC(28AWG)
 - L) Braiding 64/0.12AL
 - M) Jacket OD:6.0±0.15mm Black
- 3.0 USB Cable Spec.

Remark:
 1.100% Open/Short Test
 2.Conductive Resistance:2ohms MAX
 3.Insulation Resistance:5M ohm MIN.
 4.The product is Reach/RoHS compliant.

Item NO.	Length
SB0002	5.0m

③	External Mold	Outer Mould 35P PVC, Black	2PCS	
②	Connector	USB 3.0 A Male w/ Can-Shielding, Nickel-Plated	2PCS	
①	Cable	[(7/0.12BC+FPE)*1P+D+AL+Mylar]*2C+(7/.012BC+HDPE)*1P + (17/0.16BC+PVC)*2C+7/0.12BC+AL+D+B+OD6.0PVC Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ACT		ERP NO.:		SAMPLE DWG NO.:	
		DOC No.:		REVISION	A0
		CUSTOMER:		UNIT	mm
		CUSTOMER P/N:		SCALE	NO
		DESCRIPTION	28+28+22 USB 3.0 A Male to USB 3.0 A Male	PAGE NO	1/1
				DATE	2019/04/28
APPROVAL		CHECKED		DRAWN	