


OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

Voltage :5V
Lod Crrnt:Max:3A

CONTACTS:

P1	1	2	3	4	64
PCB	VBUS	A7	A6	GND	64
P2	A4+B4+A9+B9	A7	A6	A1+B1+A12+B12	64
Wire	Red	White	Green	Black	Drain

⑥	A light adhesive stickers:50*10mm(Black words on the White background)	1PCS
⑤	PE	12g
④	45P Black PVC	25g
③	USB2.0 AM(White insulator , Nickel plated)	1PCS
②	USB3.1 C Type(Black insulator , Nickel plated)3.0,Resistance 10KΩ,Metal Can,(Xinhan:UCC-16K346C2)	1PCS
①	UL2725 28#*1P+28#*2C+AL+D+B(16*5/0.12AM) OD=3.5mm Black PVC Jacket.	1PCS
No.	Description	Qty

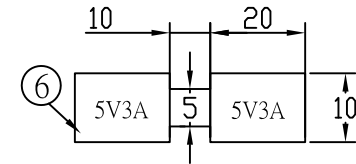

Stickers

Company		Goods Code		Draw	QMQ	Date	2016.01.20
ITEM NO.	SB0025	Drawing Evidence		Check		Date	
Goods NO.				Approval		Date	
Original NO.		Unit(mm)					



D		
C		ZML 2016.01.14
B		ZML 2015.11.12
VER. A	REVISE	Date