
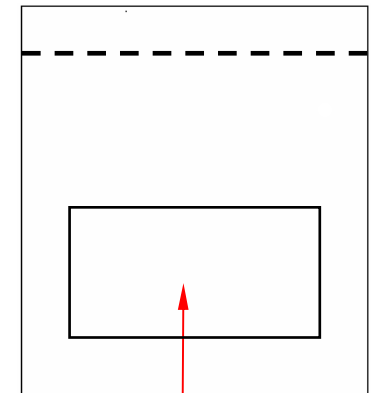


PART NO:

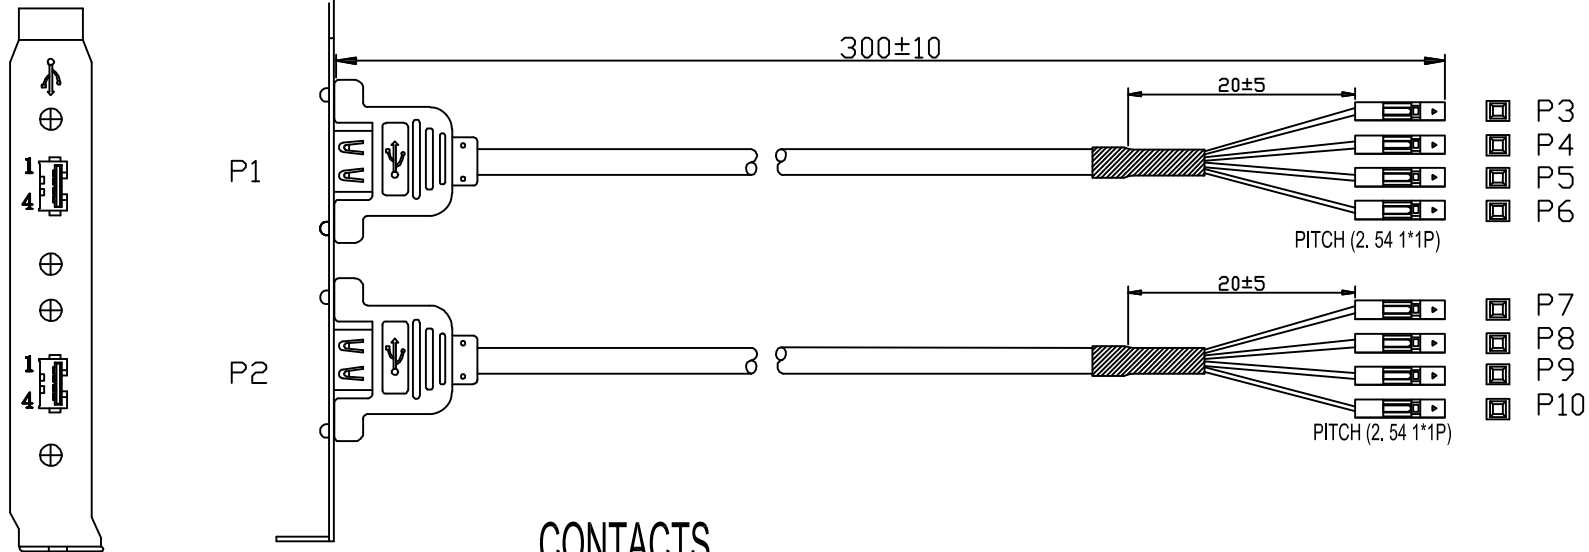

SB2400
 USB 2.0 BRACKET
 15000.001-XXXXXX

8 716065 1188851

CONTACTS

- | | | | |
|-----------|-----------|-----------|-----------|
| P1 | P3 | P2 | P7 |
| 1 RED | 1 RED | 1 RED | 1 RED |
| 2 WHITE | 2 WHITE | 2 WHITE | 2 WHITE |
| 3 GREEN | 3 GREEN | 3 GREEN | 3 GREEN |
| 4 BLACK | 4 BLACK | 4 BLACK | 4 BLACK |

BRACKET BRAID BRACKET BRAID

NOTE:

1. ELECTRICAL TEST:
 <1>.100% OPEN SHORT & MISS WIRE TEST.
 <2>.Min. INSULATION RESISTANCE:Min. DC300V 2Mohm.
 <3>.Max. CONDUCTOR RESISTANCE: 10ohm.



7	Heat-Shrinkable T bush	∅0.3.0*12mm			2PCS		G009F00
6	WIRE NAIL	5.92*6.42*3.1 SR	Beige	ABS	10g		XKW-S22
5	TYPE OF PLUG	XH2.54 1P M shell	Black	ABS	8PC		G0017N05
4	PIN OF PLUG	XH2.54 F Terminal		Tinned coppier	8PCS		G0032N00
3	CORD SPECIFICATION	28AWG/1P+26AWG/2C+GRD+AL, OD=3.5	Beige	32P PVC	1PC	300MM	G0003X02
2	TYPE OF PLUG	USB AF	Beige	45P PVC	45g		XKW-U01
1	PIN OF PLUG	USB AF Terminal	White	Iron cross nickel	2PCS		G0001N05
ITEM	NAME	SPECIFICATION	COLOUR	MATERIAL	QTY	SIZE	REMARK

Tolerance unless otherwise specified	Linear	0.00±	Model name: 2*USB AF to XH2.54 1P M cable.		
	Angles	± °	Customer No.: SB2400		
Size :A4	Unit:mm	Rev:A	Approved By		Date
Scale:1:1					2013/9/16