

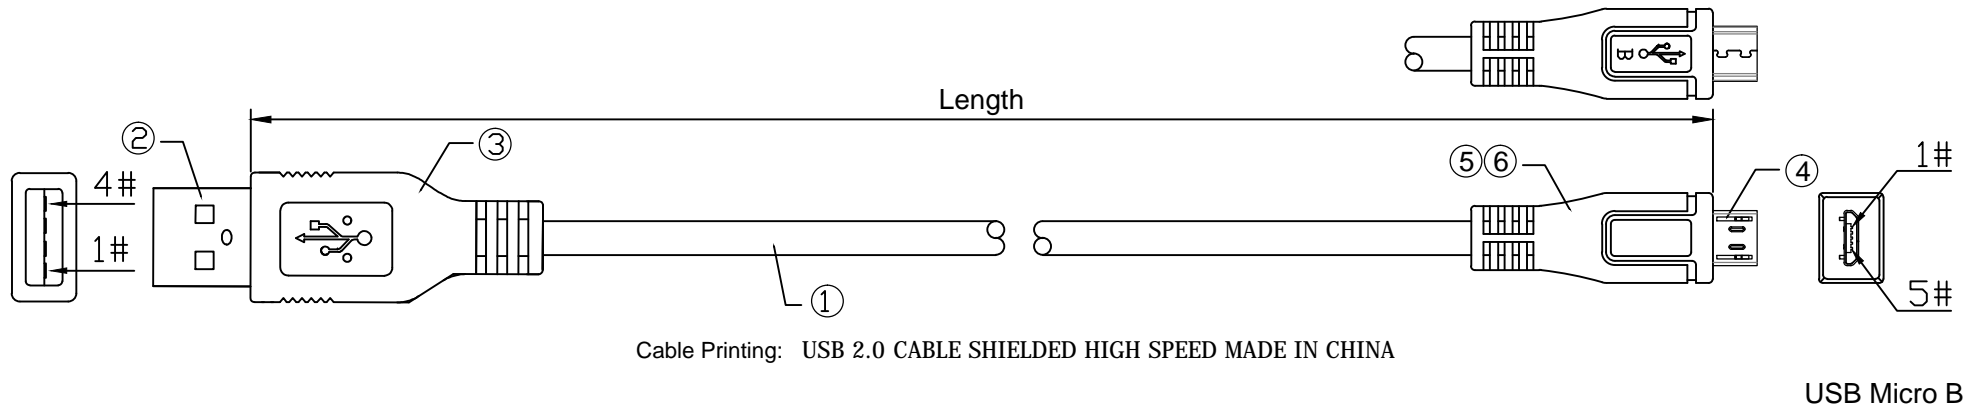


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/11/29	

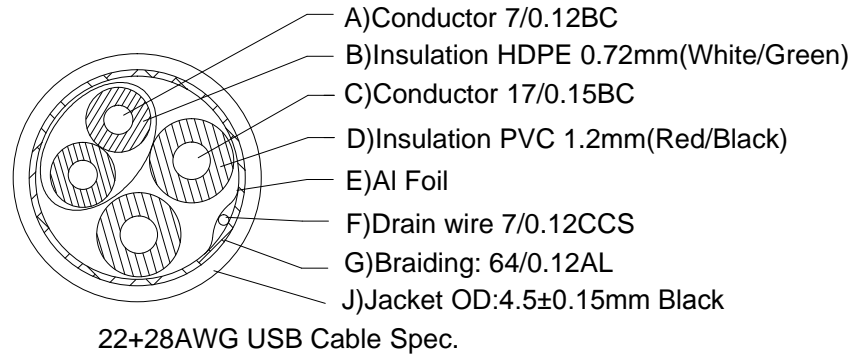


CONNECTION

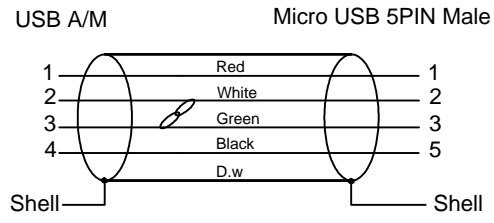

Remark:
 1.100% Open/Short Test
 2.Conductive Resistance:2ohms MAX
 3.Insulation Resistance:5M ohm MIN.
 4.The product is Reach/RoHS compliant.

Item NO.	Length(m)
SB0005	0.5m
SB0006	1.0m
SB2498	2.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑥	External Mold	Outer Mould 45P PVC, Black	1PC
⑤	Innernal Mold	Inner Mould PE	1PC
④	Connector	Micro USB Male, Nickle-Plated	1PC
③	External Mold	Outer Mould 45P PVC, Black	1PC
②	Connector	USB A Male, Nickle-Plated	1PC
①	Cable	22+28 USB Cable OD:4.5mm 22+28 [7/.012BC(28AWG)+HDPE]*1P +[17/0.15BC (22AWG)+PVC]*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC Black	



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	22+28 USB A Male TO Micro B 5Pin	PAGE NO	1/1
		DATE	2019/11/29
APPROVAL		CHECKED	
		DRAWN	