

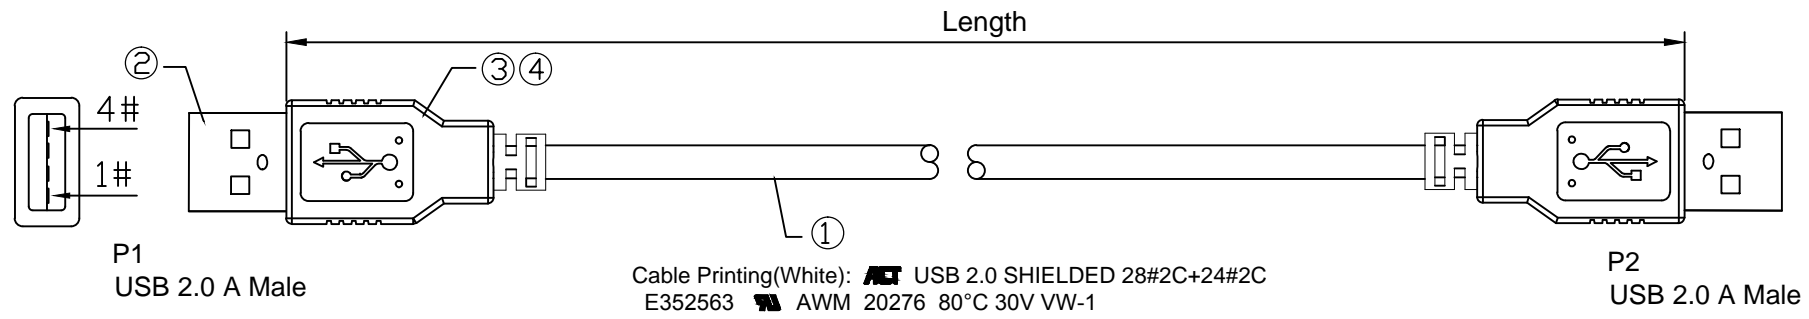


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/01/27	

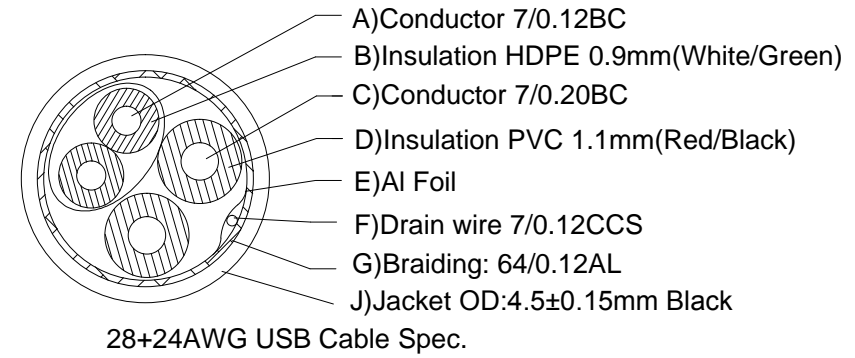


Remark:  
 1.100% Open/Short Test  
 2.Conductive Resistance:10ohms MAX  
 3.Insulation Resistance:5M ohm MIN.  
 4.The product is Reach/RoHS compliant.

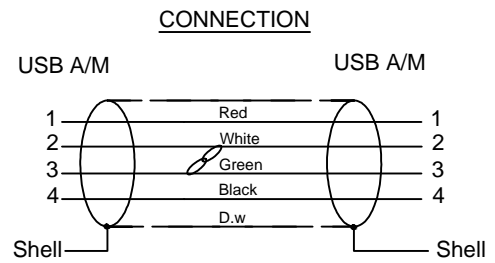






Item NO.	Length(m)
SB2520	1.8m
SB2530	3.0m
SB2550	5.0m

③	External Mold	Outer Mold 45P PVC, Black	2PCS	
②	Connector	USB A Male, Nickle-Plated	2PCS	
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



<b>ACT</b>			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO A Male	PAGE NO	1/1
		DATE	2021/01/27
APPROVAL		CHECKED	
		DRAWN	

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/01/27	

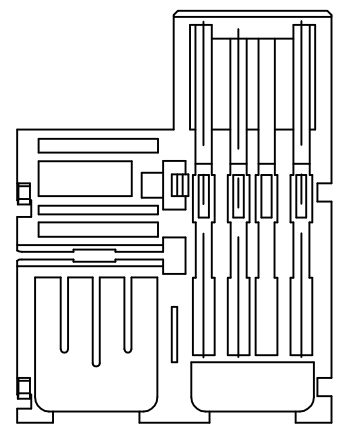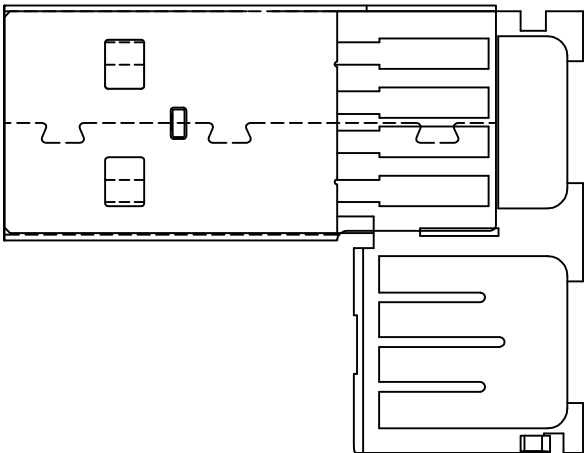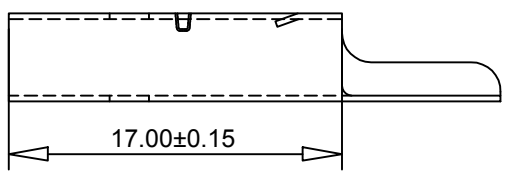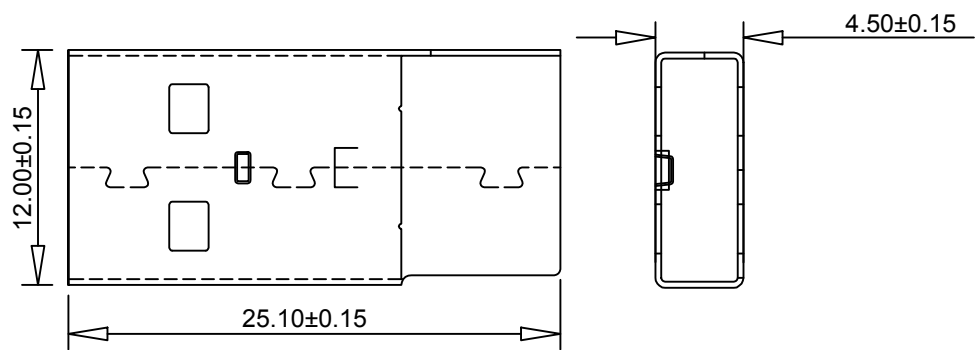

ERP NO.:		SAMPLE DWG NO.:	
ACT No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
		DATE	2021/04/14
APPROVAL	CHECKED	DRAWN	