




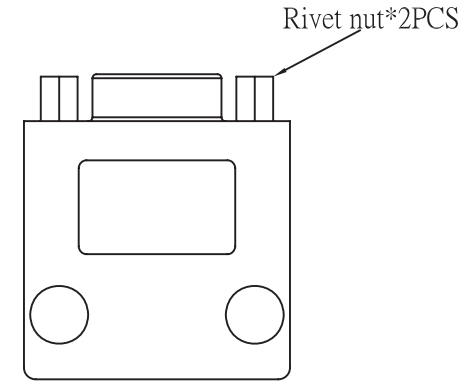


HDB 15F(GOLD PLATED)



HDB 15M(GOLD PLATED)



HDB 15M TO HDB 15F ADAPTER
BLACK MOLDING
Tolerance:±0.3mm

NOTE:

1. CABLE:UL1007 28# WIRE,PVC JACKET.
 2. LENGTH:
 3. CONNECTOR:HDB15M*1PCS(FULL PIN),HDB 15F*1PCS.(BLACK INSULATOR,GOLD PLATED)
 4. SCREW:#4-40 SCREW*2PCS.
 5. CONTACTS:
- | | | | | | | | | | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|
| HDB15M | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 64 |
| HDB15F | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 64 |
6. MOLD:BLACK COLOR
 7. OPEN/SHORT TEST: 100% TEST.
INSULATIONS: 5M.

Company		Goods Code		Draw	WJF	Date	2010.09.21		D		
ITEM NO.		Drawing Evidence :		Check		Date			C		
Goods NO.				Approval		Date			B		
Original NO.	S-*****	Unit(mm)							VER. A	REVISE	Date