





| REVISIONS |         |                 |      |            |
|-----------|---------|-----------------|------|------------|
| REV.      | ECN NO. | DESCRIPTION     | DRAW | DATE       |
| A0        | NA      | Initial version |      | 2023.03.28 |

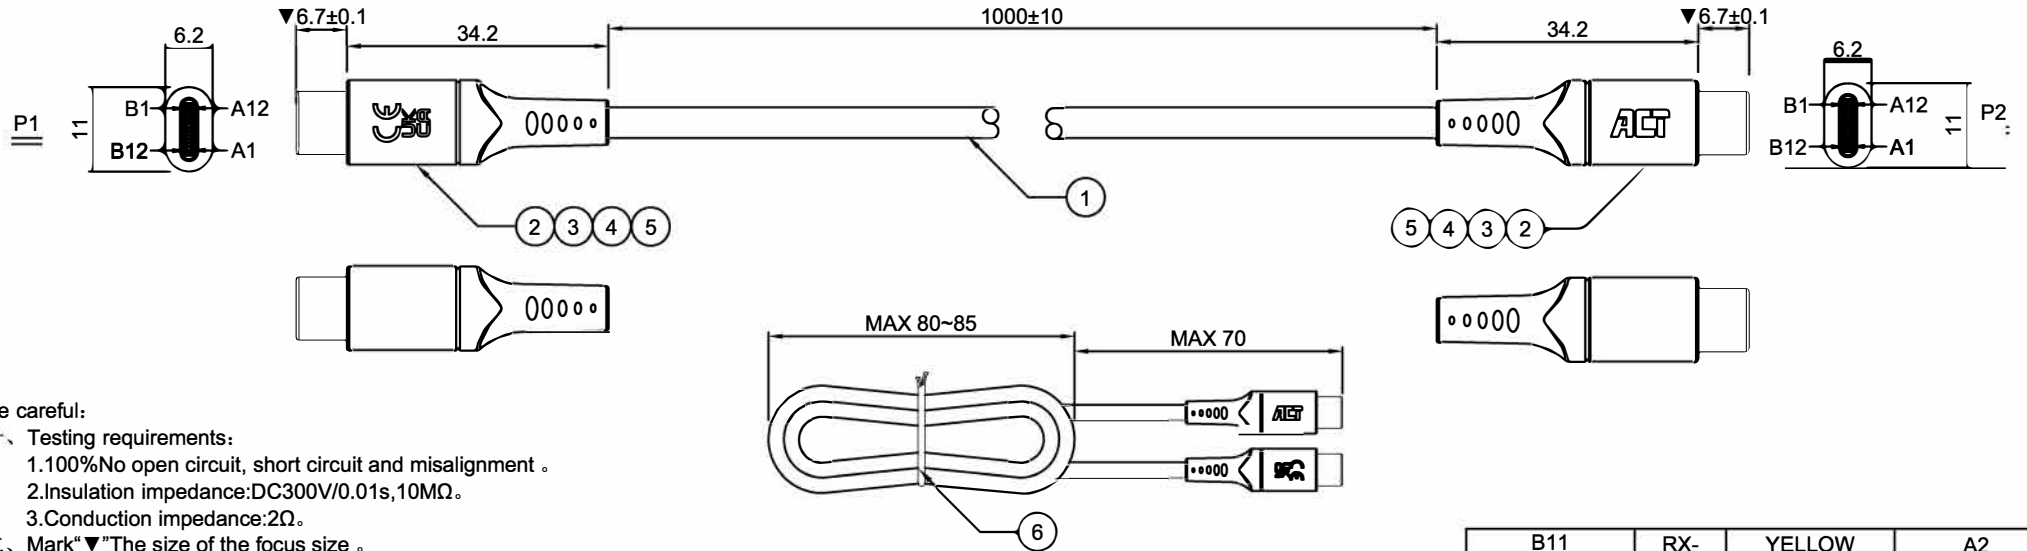

**Be careful:**

- 一、 Testing requirements:
  - 1.100%No open circuit, short circuit and misalignment .
  - 2.Insulation impedance:DC300V/0.01s,10MΩ.
  - 3.Conduction impedance:2Ω.
- 二、 Mark"▼"The size of the focus size .
- 三、 The use of raw materials and processes for this product must comply with RoHS2.0 Regulations for Circumferential Management Substances.

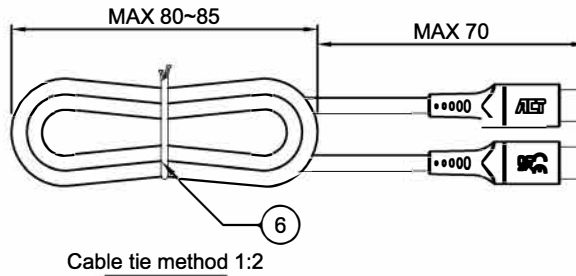

|               |        |        |               |
|---------------|--------|--------|---------------|
| B11           | RX-    | YELLOW | A2            |
| B10           | RX+    | BLUE   | A3            |
| A2            | TX-    | PINK   | B11           |
| A3            | TX+    | GRAY   | B10           |
| A4,B4,A9B9    | VBUS   | RED    | A4,B4,A9B9    |
| A5            | CC     | ORANGE | A5            |
| A1,B1,A12,B12 | GND    | BRAID  | A1,B1,A12,B12 |
| A7            | D-     | WHITE  | A7            |
| A6            | D+     | GREEN  | A6            |
| SHELL         | SHELL  | BRAID  | SHELL         |
| P1            | SIGNAL | COLOR  | P2            |

**WIRE CONNECTION TABLE**

|      |               |                       |  |       |      |
|------|---------------|-----------------------|--|-------|------|
| 6    | OTH-CA0010261 | cable tie             | Paper wire tie   | 0.1   | M    |
| 5    | OTH-CA0010266 | Wire clamp            | Type C3.0CM (1m) Material: PBT + 25% G.F For 24 AWG + 32AWG Compliant with UL94V-0 RoHS2.0   | 2     | PCS  |
| 4    | OMP-CA0010038 | Plastic raw materials | 35P PVC material, black over ROHS2.0 + REACH + PAHS2   | 0.008 | KG   |
| 3    | OMP-CA0010304 | Plastic raw materials | PP natural color transparent / over ROHS2.0 + REACH + PAHS2 + SCCP   | 0.004 | KG   |
| 2    | ETC-D04160802 | TYPE-C Male Head      | Type C3.0CM Black Rubber Core LCP, Phosphor Copper Gold Plated 1 U Terminal , Nickel plating on iron shell, short circuit between ground pin and steel shell, RoHS2.0 (for CTO C3.0)   | 2     | PCS  |
| 1    | EWD-840100002 | Data line             | USB3.0 / 24AWG (7 / 0.20TC) * 2C (Red BlackHDPE, ID0.9)+[32AWG(7/0.08TC)*1P(FPE, ID0.6)+D(7/0.08TC)+Al/My]*2C( Blue Yellow / Purple Orange) + 32 AWG(7/0.08TC)*3C(HDPE, ID0.6)+Al+B(16 /6/0.08TC)OD:4.0/ Black PVC cover / RoHS2.0 / REACH / CE / cutting wire: 1070 ± 5mm | 1     | PCS  |
| ITEM | PART NO.      | NAME                  | DESCRIPTION  | Q'TY  | UNIT |

|  |       |                         |                  |
|--|-------|-------------------------|------------------|
| X.±1   | X°.   | Customer NO: 6015       |                  |
| .X±0.3   | .X°   | Customer P/N: NA        |                  |
| .XX±0.20   | .XX°  | PART NO.                | TITLE:           |
| .XXX±0.100   | .XXX° | FCA-CCAS058/FCA-CCA0040 |                  |
| UNITS:   | mm    | DRAW: 2023.03.28        | DWG NO:          |
| THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MSH ELECTRONIC AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MSH ELECTRONIC |       | CHKD:                   |                  |
|  |       | APPD:                   |                  |
|  |       |                         | SCALE SHEET REV. |
|  |       |                         | 1:1 1/1 A0       |