

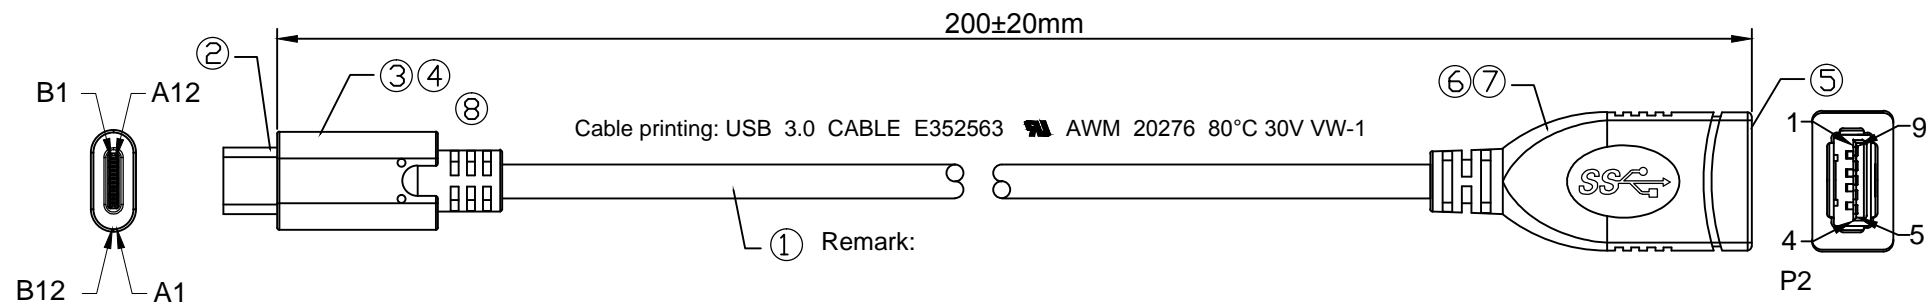



| REV. | REVISED DESCRIPTION | DATE | CHECKED |
|------|---------------------|------------|---------|
| A0 | FIRST RELEASE | 2021/11/19 | |

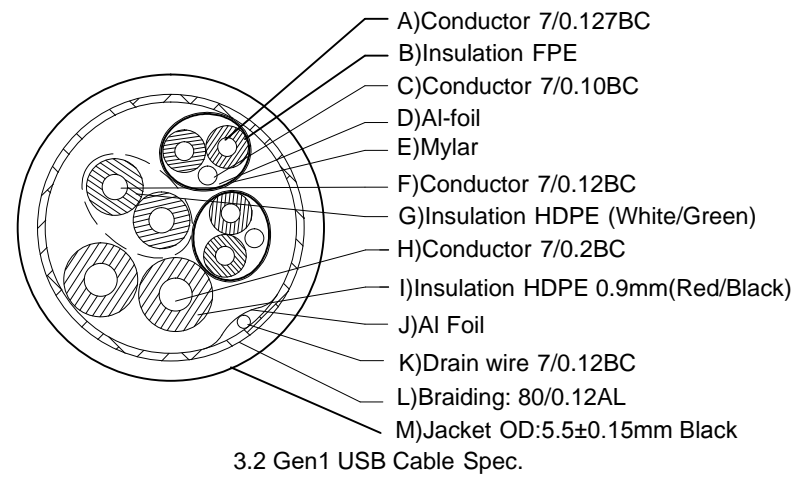


- ① Remark:
- 1.100% Open/Short Test
 2. Conductive Resistance: 5ohms MAX
 3. Insulation Resistance: 5M ohm MIN.
 4. Support OTG function.
 5. The product is Reach/RoHS compliant.

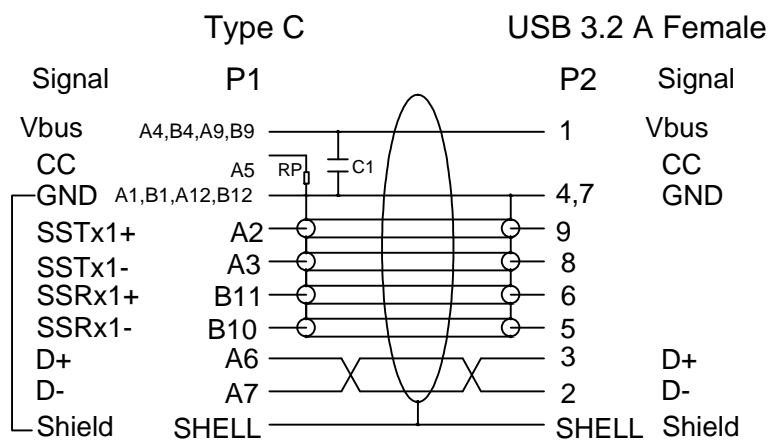

| Item NO. | Length(m) |
|----------|-----------|
| EW9639 | 0.2m |
| AC7340 | 0.2m |

3.2 Gen1 USB Cable Spec.

| ITEM | DESCRIPTIONS & SPECIFICATIONS | QTY | REMARK |
|------|-------------------------------|--|--------|
| ⑦ | External Mold | Outer Mould 35P PVC, Black | 1PC |
| ⑥ | Inernal Mold | Inner Mould PE | 1PC |
| ⑤ | Connector | USB 3.2 A Female, Nickle-Plated | 1PC |
| ④ | External Mold | Outer Mould 35P PVC, Black | 1PC |
| ③ | Inernal Mold | Inner Mould PE | 1PC |
| ② | Connector | USB 3.2 Type C Male, Nickle-Plated, 5.1KR | 1PC |
| ① | Cable | [(7/0.127BC+FPE)*1P+D+AL+Mylar]*2C+ (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+AL+7/0.12BC+80/0.12ALB +OD5.5PVC Black | 0.2m |



| | | | |
|---------------|------------------------------------|-----------------|------------|
| ACT | | | |
| ERP NO.: | | SAMPLE DWG NO.: | |
| DOC No.: | | REVISION | A0 |
| CUSTOMER: | | UNIT | mm |
| CUSTOMER P/N: | | SCALE | NO |
| DESCRIPTION | USB3.2 Gen1 Type C Male - A Female | PAGE NO | 1/1 |
| | | DATE | 2021/11/19 |
| APPROVAL | CHECKED | DRAWN | |