



1. Test:
 1. 100% short circuit, open circuit and dislocation test;
 2. conduction impedance: 3ω (Max)
 3. field measurement: A.) field measurement C correct reverse identification hard disk
B.) Whether the measured disk transmission speed reaches USB3.1, The read/write data must be at least 300MB/S



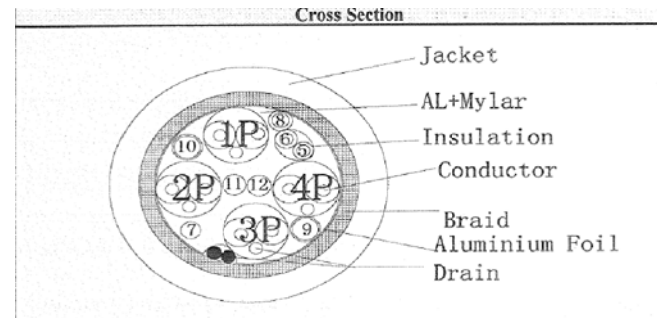


⑩	Wire clip 30+32+26+34AWG	2	pcs
⑨	High temperature adhesive tape	0.07	M
⑧	Double conductive copper foil	0.08	M
⑦	USB TYPE C on Meta Can	2	pcs
⑥	USB TYPE C Under the Meta Can	2	pcs
⑤	45P Black PVC	12	g
④	Low pressure forming material ~	1	g
③	USB 3.1 C Type Connector PCB+SMT+10NF Capacitance Nickel plating	1	pcs
②	3.1 C Type Connector PCB+SMT+10NF Capacitance+IC Nickel plating	1	pcs
①	USB3.1 [30AWG (7/0.1TC)+EAM]*4P+[32AWG (7/0.08TC)+EA]*1P+26AWG (7/0.16TC)*2C+[34AWG (7/0.06TC)+A]*3C+34AWG (7/0.06TC)*1C+A2EB (24/11/0.06TC 85%) OD:5.2MM black	1.01	M
NO	ITEM DESCRIPTION	Q'TY	UNIT



REV.	ECN NO	DESCRIPTION	DATE	NAME
		ACT		
		TITLE: USB3.1 CM TO CM(E-Mark) 5G 3A L=1M		
DRAWN BY		Shijie		CUSTOMER P/N : AC7401
CHECK BY		SCALE	NONE	DRAWING NO.:
APPD BY		UNIT	MM	
		DATE	2021.11.15	REV. AO
				1/3

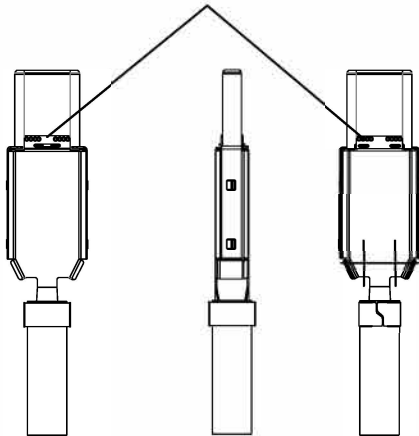

4、Pin Assignment:

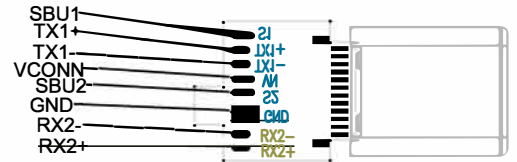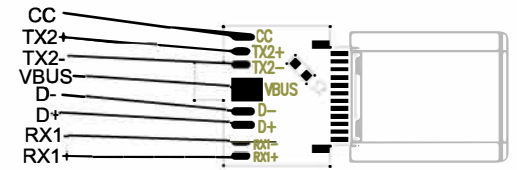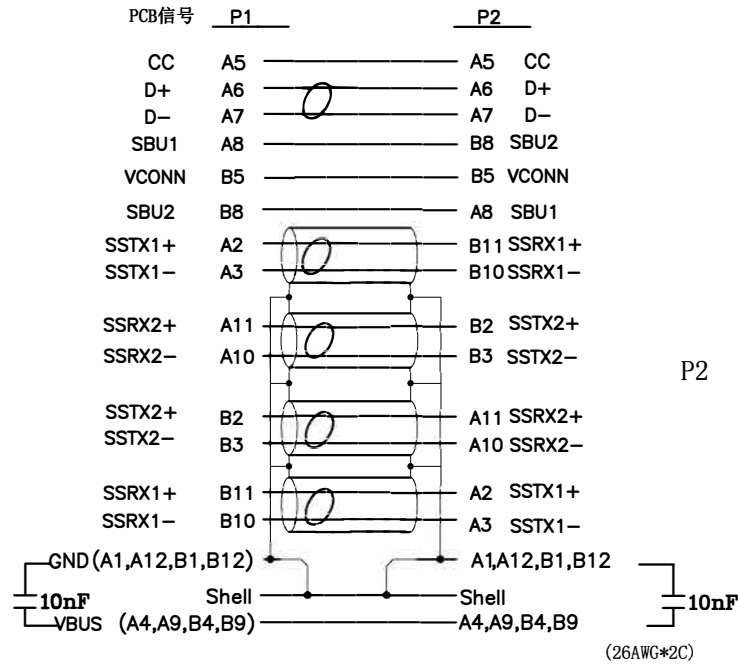

P2

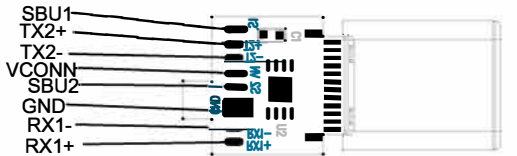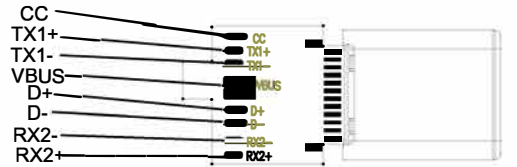

REV.	ECN NO	DESCRIPTION	DATE	NAME
	TOLERANCE			
	INCHES M/M			
	.X	.015 .30		
	.XX	.010 .10		
.XXX	.005 .05	TITLE:		
		USB3.1 CM TO CM(E-Mark) 5G 3A L=1M		
DRAWN BY	Shijie	CUSTOMER :		
		CUSTOMER P/N :	AC7401	
CHECK BY		SCALE	NONE	DRAWING NO.:
		UNIT	MM	
APPD BY		DATE	2021.11.15	REV. A01
				2/3

NO	ITEM	DESCRIPTION	Q'TY	UNIT