


NOTE:

1. CABLE:30AWG, NON-UL, AL-FOIL, 25C+1, BEIGE COLOR,, OD=7.0mm, PVC JACKET.
2. LENGTH: 5000mm
3. CONNECTOR:DB25M*1,CN36M*1 (BLACK INSULATOR)
4. MOLD: APPLE MOLDING
5. SCREW:4*40 ,INCH SCREW*2,BEIGE.
6. CONTACTS:
 DB25M | 1...4...14 15 16 17 18 19 20 21 22 23 24 25 64
 CN36M | 1...4...14 32 31 36 33 19 21 23 25 27 29 30 64
7. OPEN/SHORT TEST: 100% TEST.

INSULATION: MIN. 1M.

RoHS Compliant

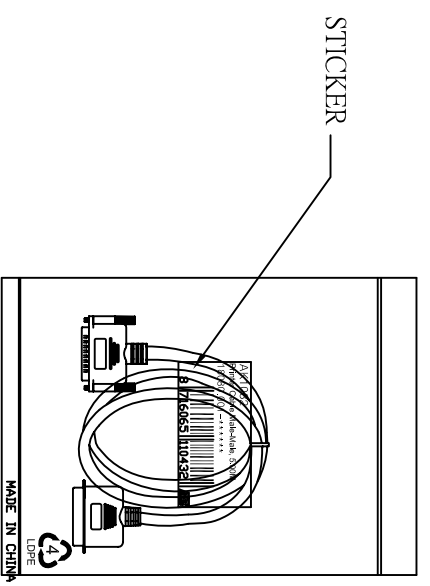

1PCS/PE BAG(0.06*190*300mm)+STICKER

Company	I.B.V	Goods Code	Draw	FC001 WJF	Date	2009.10.13	D	
ITEM NO.	AK 1032	Drawing Evidence	Check		Date		C	
Goods NO.			Approval		Date		B	Adding Packaging Info.
Original NO.	S*****	Unit(mm)			Date		VER. A	REVISE
								Date

