
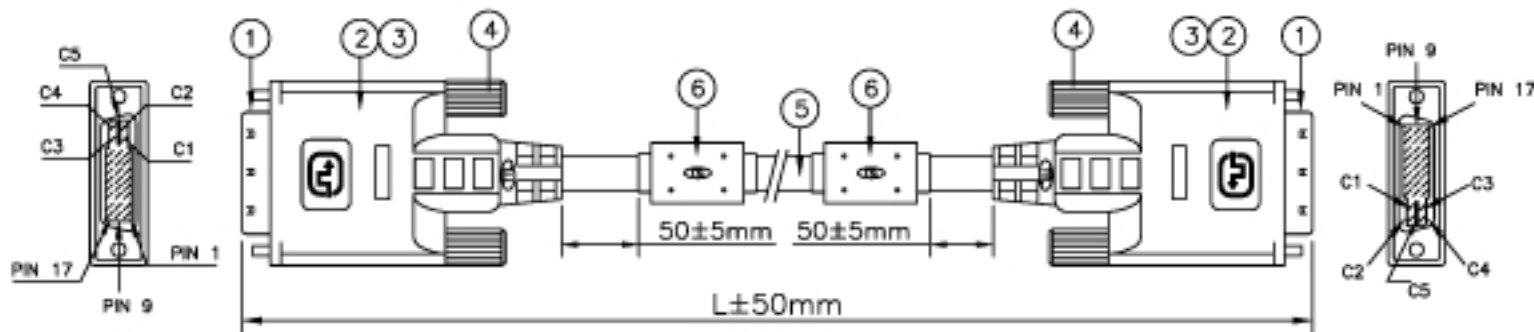


PINOUT CONFIGURATION

CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

DVI MALE

DVI MALE

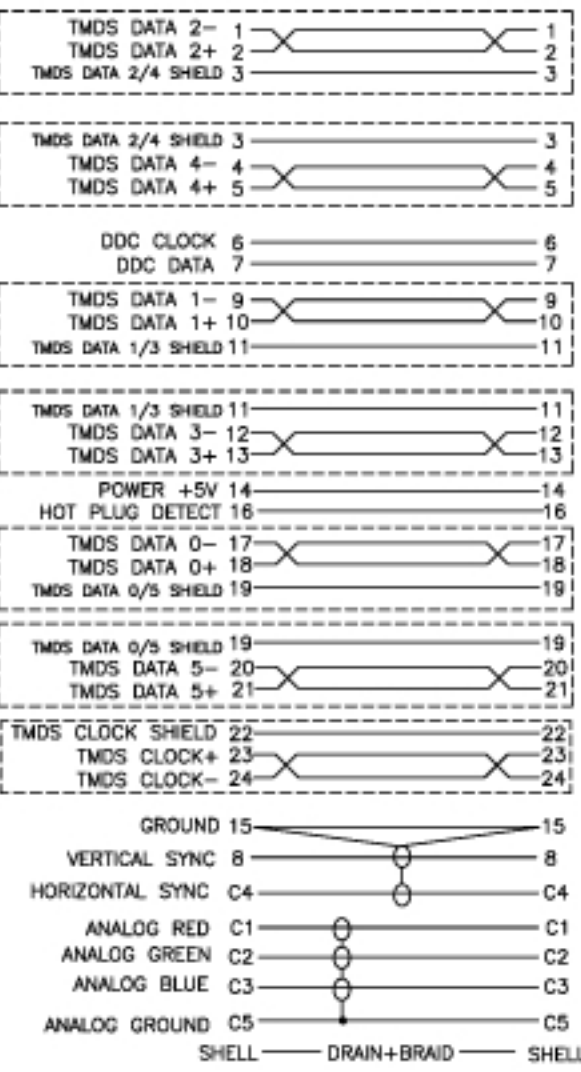

- NOTE:
- THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK SHIELDING DESIGN.
 - WIRE MARKING:

E193793 RU AWM 20276 80°C 30V VW-1
 DVI-I DUAL LINK A+D

Customer's P/N	L (mm)
AK3720	2000
AK3721	3000
AK3722	5000
AK3724	10000

UNITS:mm

ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR	2	PCS
2	LIGHT GRAY K239 COLOR MOLDED PVC HOOD	2	PCS
3	RF-BLOK	2	PCS
4	LIGHT GRAY K239 COLOR #4/40 THUMBSREW	4	PCS
5	UL20276 (30AWG COAX WITH 90% SPIRAL SHIELD)*5C+ (30AWG*1PAIR+AL-FOIL+DRAIN)*7C+(30AWG WIRE)x5C AL-FOIL/MY+DRAIN+BRAID OVERALL LIGHT GRAY K239 COLOR PVC JACKET	SEE	DWG
6	LIGHT GRAY K239 COLOR FERRITE CORE (17.5*28.5*10)	2	PCS

REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY
A	CHANGE WIRE SPEC.	08/08/02	CANDY

Customer's P/N: SEE TABLE	Revision: A
RFQ number:	Drawing #: 020755
Drawn by: CANDY	Scale: None
Checked by:	Date: 07/08/2002

AK3720

SALES : LILIAN