


CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

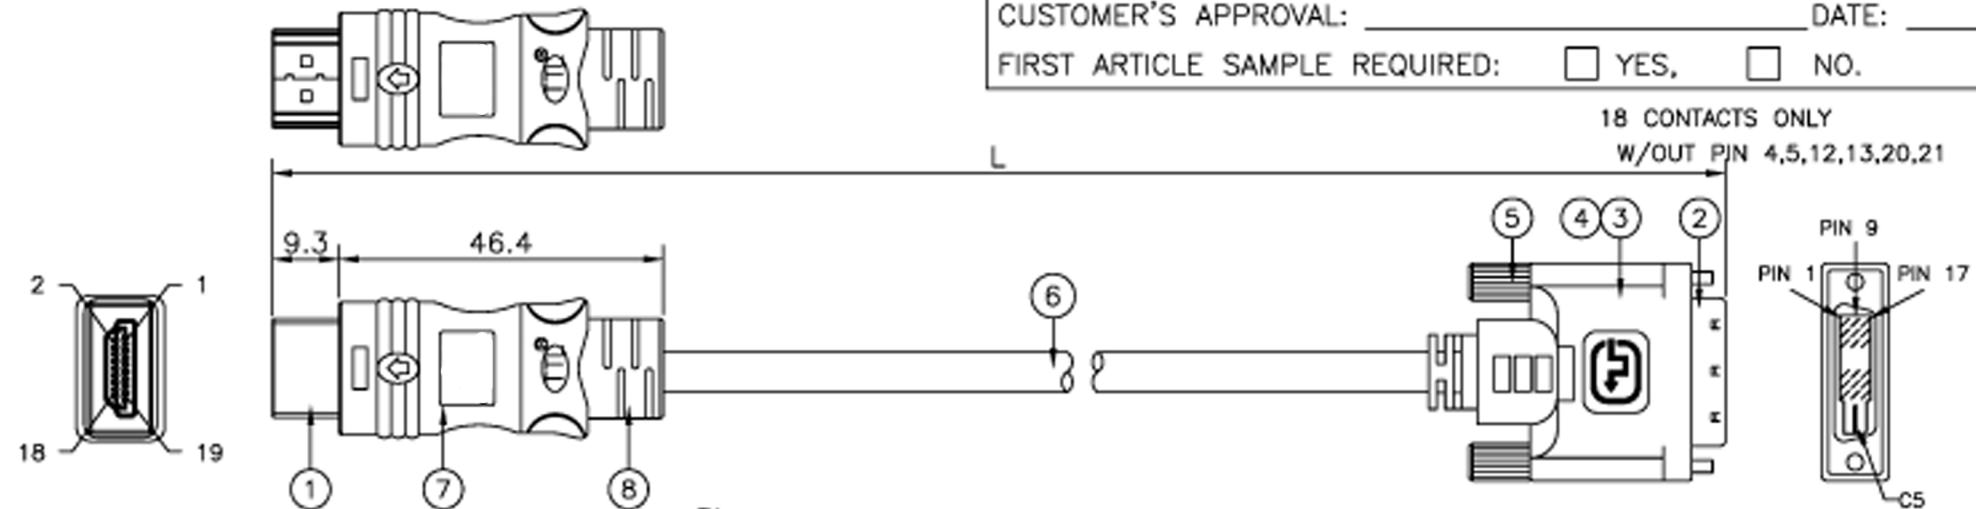


THIS SLAC™ WIRE SPEC CAN SUPPORTS THE ELECTRICAL PERFORMANCE ABOVE 5 METERS,AS HEREUNDER.

- NOTE:
 1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.
 2. WIRE MARKING:

E193793 RJ AWM 20276 80°C 30V VW-1

DVI SINGLE LINK DIGITAL SUPER LOW ATTENUATION CABLE (SLAC™)

CUSTOMER'S P/N	L±(mm)
AK3744	10000±200
AK3746	15000±250
AK3748	20000±250

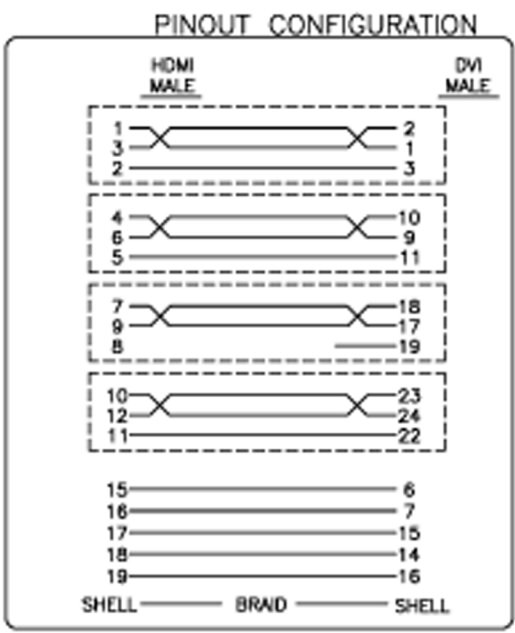

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN CONNECTOR,MALE W/GOLD PLATED PINS UL94V-0	1	PCS.
2	DVI MALE CONNECTOR W/18 CONTACTS ONLY(18+1)	1	PCS.
3	BLACK MOLDED PVC HOOD	1	PCS.
4	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	1	PCS.
5	BLACK #4/40 THUMBSCREW	2	PCS.
6	(100Ω SHIELDED TWIN PAIRS)x4+5C WIRE; AL-FOIL+85% BRAID; BLACK PVC JACKET.	L	mm.
7	PAT. US 6,287,148 B1 RF-BLOK™ NICKEL PLATING SHIELDING METAL CAN	1	PCS.
8	BLACK MOLDED PVC HOOD	1	PCS.

REVISED DETAILS			REVISED BY	Part number:	Revision:	AK3744
REV.	DESCRIPTION	DATE			ORIG.	
				RFQ number:	Drawing #: 94061604	
				Drawn by: STANLEY	Scale: None	
				Checked by:	Date:	