

Conn.1 Mini Display Port

Conn.2 Display Port F


Tabel:

Part No	Length
AK3955	1000±30
AK3956	1500±30
AK3957	2000±50
AK3958	3000±50

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm Max
3. Insulation Resistance: 10M ohm Min
4. Hi-Pot: 250V DC/10ms

Pin Assignment

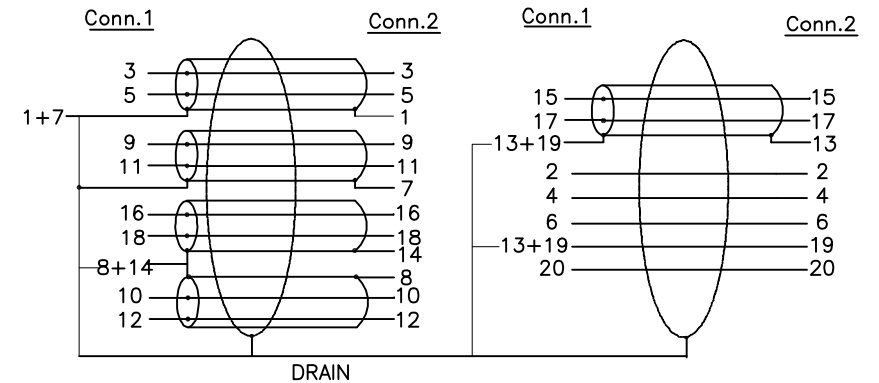

⑥	S.R. Molding 45P PVC, colocr: White	15	g
⑤	Plasitc Hood for Mini DP Female, Material: ABS, Colocr: White	1	set
④	Plasitc Hood for Mini DP Male, Material: ABS, Colocr: White	1	set
③	Mini Display Port Female, Insulation: White, Material: LCP, Pin Gold Plated , Shell Nickel Plated	1	Pcs
②	Mini Display Port Male, Insulation: White, Material: LCP, Pin Gold Plated , Shell Nickel Plated	1	set
①	Display Port Cable UL20276 [32AWG(7/0.08TC)*1P+D.W+AL +Mylar)*5+32AWG(7/0.08TC)*5C+AL/MY+D.W+BD+Jacket PVC Color: White OD:4.8±0.2mm	L	m
NO.	DESCRIPTION	Q'TY	UNIT

REV.	TOLERANCE		DESCRIPTION	DATE
	INCHES	M/M		
⊕	.X	.015	.30	
	.XX	.010	.10	
	.XXX	.005	.05	
			TITLE:	
			Mini Display Port M to F	
DRAWN BY	Henry		CUSTOMER :	
CHECK BY			CUSTOMER NO.:	
APPD BY			SCALE	NONE
			UNIT	MM
			DATE	10.08.18
			DRAWING NO.:	REV. A
				1/1