


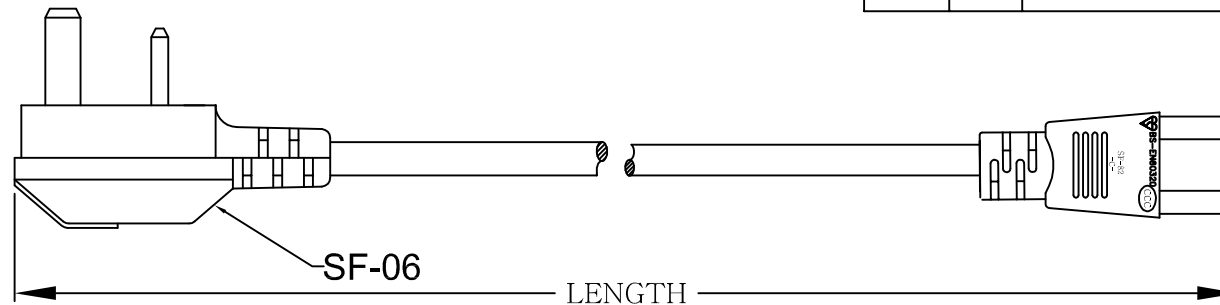


DATE	REV	DESCRIPTION	BY	CHKD
	A/0			

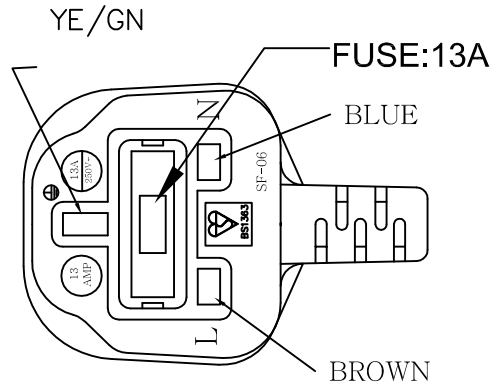

H05VV-F 3G1.0mm<sup>2</sup>

### Product Description

1. Bare stranded copper conductor
2. Color-coded PVC insulation and jacket
3. Cores twisted together
4. Rated temperature:70 °C
5. Rated voltage:300V/500V



### NOTES:

1. PLUG: SF-06+SF-82
2. WIRE: H05VV-F 3G1.0MM<sup>2</sup>
3. COLOR: BLACK
4. LENGTH: 2500±30mm

ROHS.compliant

WIRE MARKING:

+ S + S + S KEMA-KEUR   
 ◀VDE▶ NF-USE 1345 IEMMEQU N17436 H05VV-F 3G1.0MM<sup>2</sup>

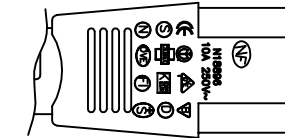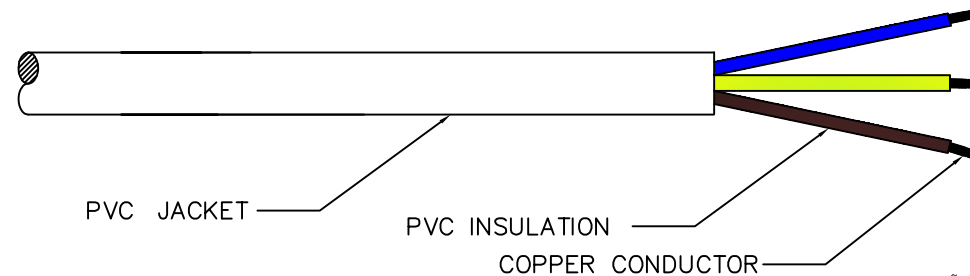

### Applications:

Suitable for indoor small electrical instruments power supply wire:

wire type	No. of core	Conductor	Insulation			Jacket	Overall diameter
			MM <sup>2</sup>	Diameter	Min.Thick	Min.AVG Thick	
H05VV-F	3						
		1.0	2.5±0.05MM	0.44mm	0.6mm	0.58mm	7.0±0.1mm

Unless specified on the drawing, tolerances are per the follows:  
 . ± 1  
 .X ± 0.2  
 .XX ± 0.05

3RD



DRAW.NO		ITEM	AK5060		
DEPARTMENT	R&D	DRAW	PEAK	DATE	2010.03.22
SCALE		CHECKER		DATE	
UNIT	MM	APPROVAL		DATE	