



| DATE | REV | DESCRIPTION | BY | CHKD |
|-------|-----|-------------|--------|------|
| 07/22 | A/0 | NEW | CAOWEN | YZG |

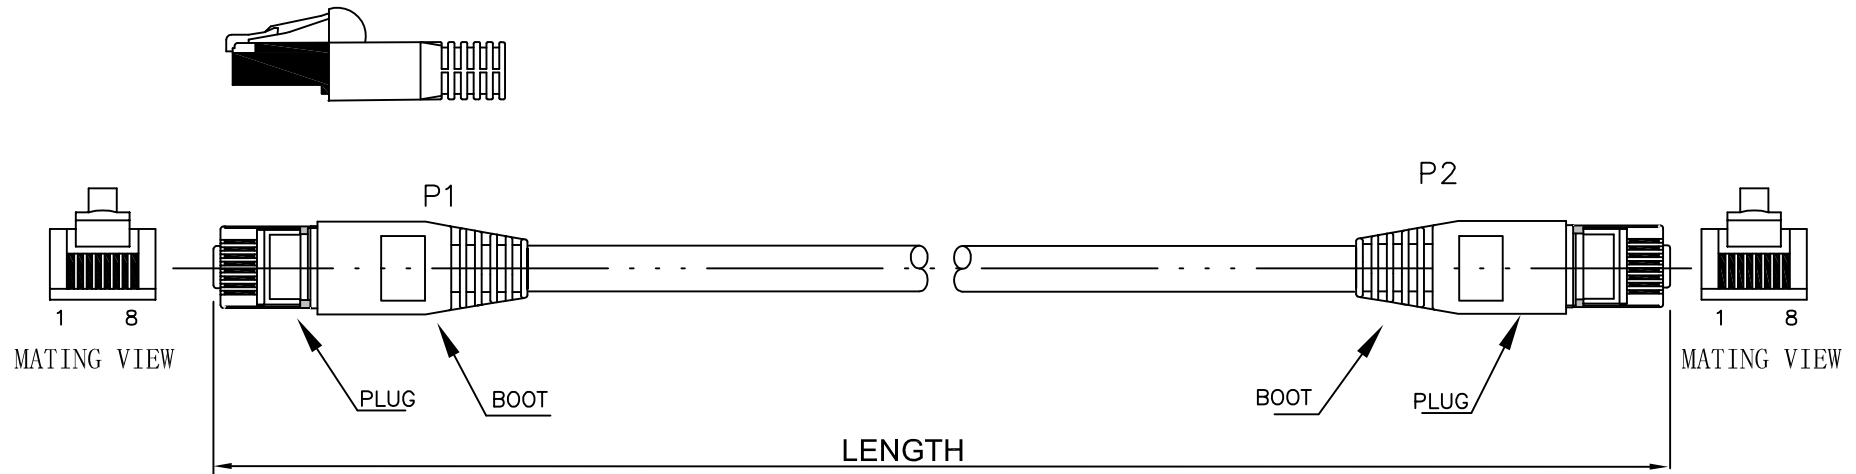

Marking: ACT CATEGORY 5E SFTP PATCH CABLE 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-2-2 & IEC 60332-1-2 ▲ 26AWGX4P (UL) c(UL)CMH E164469-XX

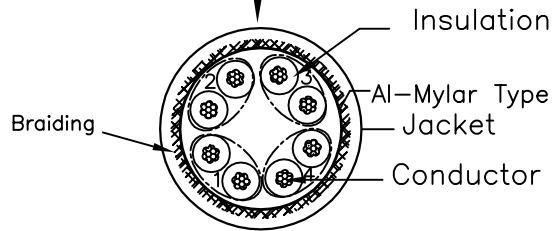

| | |
|--------------------------|------------------------|
| orange 2 white/orange | green 3 white/green |
| blue 1 white/blue | brown 4 white/brown |

| PA/R | PIN OUT | | |
|------|-----------|---------|-----------|
| | P1(T568B) | WIRE | P2(T568B) |
| 2 | 1 | WHT/ORG | 1 |
| | 2 | ORG | 2 |
| 3 | 3 | WHT/GRN | 3 |
| | 6 | GRN | 6 |
| 1 | 4 | BLU | 4 |
| | 5 | WHT/BLU | 5 |
| 4 | 7 | WHT/BRN | 7 |
| | 8 | BRN | 8 |

| | |
|------------|--|
| Conductor | Bare Copper 26AWG |
| Insulation | Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.88±0.06mm |
| Jacket | PVC Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.6±0.2mm |

| | |
|--------|---------------------------|
| WIRE | CAT. 5E SFTP STR 26AWG*4P |
| PLUG | WITH BOOT 8P8C 50U" |
| Length | XXM |
| COLOR | WH903 |

Unless specified on the drawing, tolerances are per the follows:

| | |
|-----|--------|
| . | ± 1 |
| .X | ± 0.2 |
| .XX | ± 0.05 |

| | |
|-----|--|
| 3RD | |
|-----|--|



| | | | | | |
|------------|---------|----------|--------|------|----------|
| DRAW. NO | 00752 | ITEM | IB70XX | | |
| DEPARTMENT | LAN DEP | DRAW | CAOWEN | DATE | 10/07/22 |
| SCALE | | CHECKER | YZG | DATE | |
| UNIT | mm | APPROVAL | | DATE | |

RoHS COMPLIANT