

PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL B"


RL2501

SC/UPC-ST/UPC duplex patchcord OM2 1M


IIC: 04015001-P0015774

ACT is a registered trademark. All mentioned brand names are registered trademarks of their respective owners. Rights to the registered Names / Logos / Trademarks / Brands / Service Marks featured are property of and belong to their respective owners. Developed and styled in Europe, made in China. Misprints and errors reserved. ACT cannot be held liable or responsible for inaccurately presented content. ACT, Kooiherstraat 1E, 3172 MT Barendse, The Netherlands. We advice to clean all the connector ferrules for optimal performance. You can find safety information at www.act-connectivity.com/safety

DETAIL C




DETAIL B
 y: Year; mm: Month
 xxxxx: Serial Number



DETAIL A

RoHS
Compliant

ASSEMBLY CONNECTIVITY	
Side:A- SC/UPC	Side:B- ST/UPC
A	B
B	A

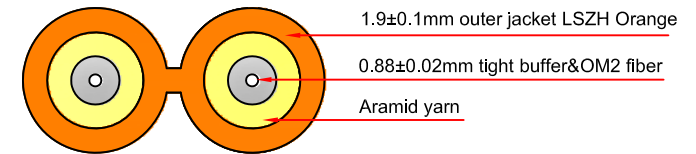

Partnumber	Length	Tolerance
RL2500	0.5M	0/+100mm
RL2501	1M	0/+100mm
RL2502	2M	0/+100mm
RL2503	3M	0/+100mm
RL2505	5M	0/+100mm

Partnumber	Length	Tolerance
RL2510	10M	0/+100mm
RL2515	15M	0/+100mm
RL2520	20M	0/+100mm
RL2530	30M	0/+150mm
RL2550	50M	0/+250mm

SC/UPC -- ST/UPC duplex (1.9±0.1)*(4.0±0.2)mm OM2 LSZH Orange

ITEM	Description	Q'TY
1	SC dust cover lucency	2 PCS
2	SC/UPC MM simplex connector beige	2 PCS
3	SC clip beige	2 PCS
4	SC boot Black	1 PC
5	SC boot Red	1 PC
6	Breakout heat-shrink tube black L=15mm	2 PCS
7	Cable lable	1 PC
8	OD=(1.9±0.1)*(4.0±0.2)mm duplex OM2 fiber optical cable LSZH Orange	1 PC
9	ST boot Red	1 PC
10	ST boot Black	1 PC
11	ST/UPC MM Simplex connector	2 PCS
12	ST dust cover lucency	2 PCS

Designed by:		Audit:	
Date:	2021-06-22	Approve:	
Unit:	mm	Sheet:	A4
Drawing NO:	RL25xx SC/UPC-ST/UPC duplex patchcord OM2-V1		

Product Specification

Standard Compliances

1. ANSI/TIA-568.3-D.
2. ISO 11801 OM1 /IEC60793-2-10 type A1a.
3. Telcordia GR-326-CORE Issue 4 February 2010 Compliance.
4. RoHS Compliance for the Requirement of European Union Issued Directive 2011/6S/EU.

Construction&Characteristics

Optical Performance	Insertion loss typical	0.15dB
	Insertion loss maximum	0.25dB
	Return loss	≥30dB
	Polish	UPC
Connector	Connector A side	IEC61754-4 SC connector
	Connector B side	IEC61754-2 ST connector
	Ferrule	Ceramic Zirconia (ZrO ₂)
Cable	Fiber class	OM2
	Fiber type	Multimode 50/125
	Cable type	(1.9±0.1)*(4.0±0.2)mm LSZH Orange
	Tensile strength	200N (short time 400N)
	Operation temp.	-20 °C to +80 °C (5 cycles)
	Vibration	10 to 55 Hz 15mm double amplitude
Marking	ACT Premium Multimode Fiber Optic Patch cable 50/125µm,OM2,LSZH xxxxM	

100% tested and approved

1. ACT advises to clean every connector ferrule before usage to get optimal performance.
2. Always leave the dust caps on if the cable isn't installed.