


PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
BAG TYPE	QTY	LABEL	
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL B"



DETAIL B
 y: Year; mm: Month
 xxxx: Serial Number

ASSEMBLY CONNECTIVITY	
Side:A- LC/UPC	Side:B- ST/UPC
A	B
B	A

RL7001

LC/UPC-ST/UPC duplex patchcord OM1 1M


IIC: 04015001-P0015774

ACT is a registered trademark. All mentioned brand names are registered trademarks of their respective owners. Rights to the registered Names / Logos / Trademarks / Brands / Service Marks featured are property of and belong to their respective owners. Developed and styled in Europe, made in China. Misprints and errors reserved. ACT cannot be held liable or responsible for inaccurately presented content. ACT, Kooiavenstraat 1E, 3772 MT Barneveld, The Netherlands.

We advice to clean all the connector ferrules for optimal performance. You can find safety information at www.act-connectivity.com/safety


www.act-connectivity.com

DETAIL C



DETAIL A

RoHS
Compliant

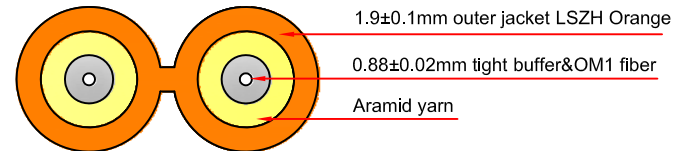

Partnumber	Length	Tolerance	Partnumber	Length	Tolerance
RL7001	1M	0/+100mm	RL7010	10M	0/+100mm
RL7051	1.5M	0/+100mm	RL7015	15M	0/+100mm
RL7002	2M	0/+100mm	RL7020	20M	0/+100mm
RL7003	3M	0/+100mm	RL7030	30M	0/+150mm
RL7005	5M	0/+100mm	RL7050	50M	0/+250mm

LC/UPC --- ST/UPC duplex (1.9±0.1)*(4.0±0.2)mm OM1 LSZH Orange

ITEM	Description	Q'TY
1	LC dust cover white	2 PCS
2	LC/UPC MM duplex connector beige	1 PC
3	LC clip beige	1 PC
4	LC short boot white L=19.5±0.5mm	1 PC
5	LC short boot yellow L=19.5±0.5mm	1 PC
6	LC heat-shrink tube white	1 PC
7	LC heat-shrink tube yellow	1 PC
8	Breakout heat-shrink tube black L=15mm	2 PCS
9	Cable lable	1 PC
10	OD=(1.9±0.1)*(4.0±0.2)mm duplex OM1 fiber optical cable LSZH Orange	1 PC
11	ST boot black	1 PC
12	ST boot red	1 PC
13	ST/UPC MM simplex connector	2 PCS
14	ST dust cover lucency	2 PCS



Designed by:		Audit:	
Date:	2021-06-23	Approve:	
Unit:	mm	Sheet:	A4
Drawing NO:	RL70xx LC/UPC-ST/UPC duplex patchcord OM1-V1		



Product Specification

Standard Compliances

1. ANSI/TIA-568.3-D.
2. ISO 11801 OM1 /IEC60793-2-10 type A1a.
3. Telcordia GR-326-CORE Issue 4 February 2010 Compliance.
4. RoHS Compliance for the Requirement of European Union Issued Directive 2011/6S/EU.

Construction&Characteristics

Optical Performance	Insertion loss typical	0.15dB
	Insertion loss maximum	0.25dB
	Return loss	≥30dB
	Polish	UPC
Connector	Connector A side	IEC61754-20 LC connector
	Connector B side	IEC61754-2 ST connector
	Ferrule	Ceramic Zirconia (ZrO ₂)
Cable	Fiber class	OM1
	Fiber type	Multimode 62.5/125
	Cable type	(1.9±0.1)*(4.0±0.2)mm LSZH Orange
	Tensile strength	200N (short time 400N)
	Operation temp.	-20 °C to +80 °C (5 cycles)
	Vibration	10 to 55 Hz 15mm double amplitude
Marking	ACT Premium Multimode Fiber Optic Patch cable 62.5/125µm,OM1,LSZH xxxM	

100% tested and approved

1. ACT advises to clean every connector ferrule before usage to get optimal performance.
2. Always leave the dust caps on if the cable isn't installed.