



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/05/17	

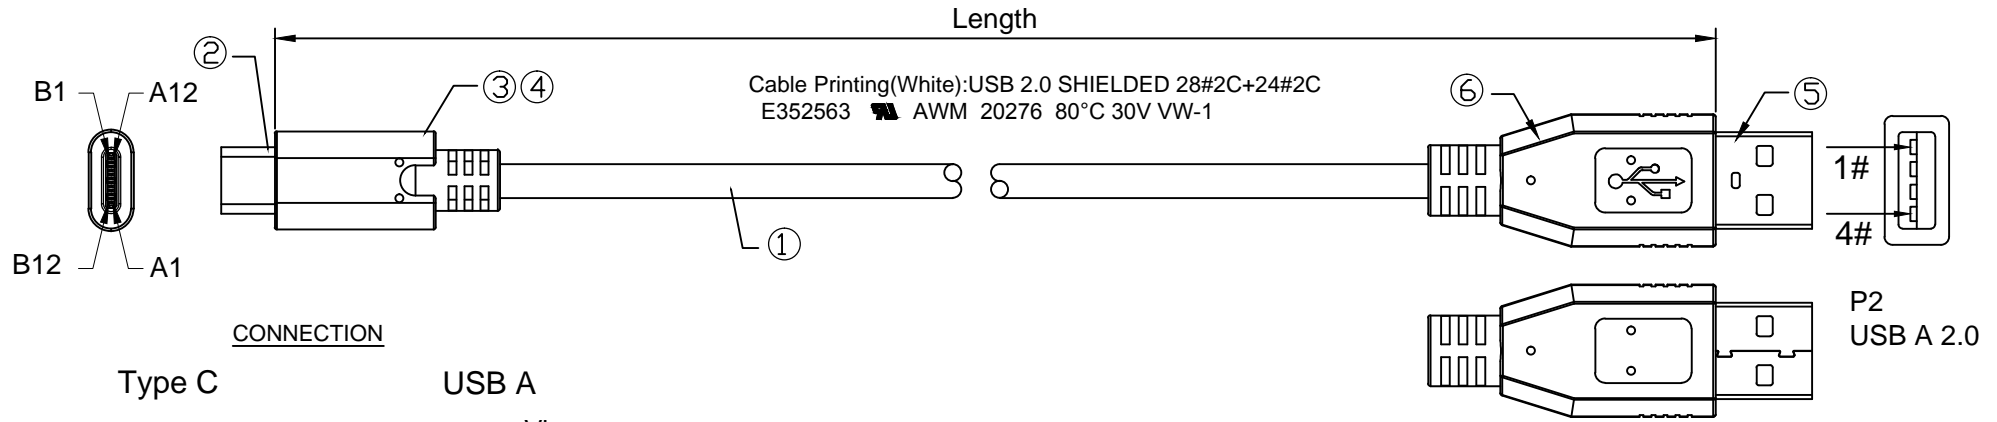

**CONNECTION**

Type C	USB A
Vbus A4,B4,A9,B9	1 Vbus
GND A1,B1,A12,B12	4 GND
D+ A6	3 D+
D- A7	2 D-
Shield SHELL	SHELL Shield

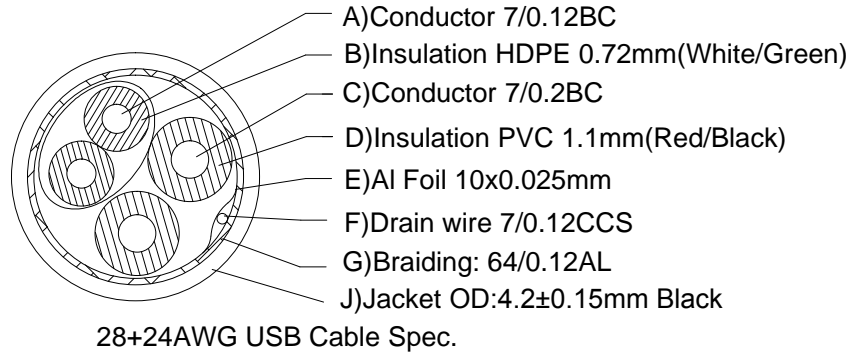


- Remark:**
- 1.100% Open/Short Test
  2. Conductive Resistance: 2ohms MAX
  3. Insulation Resistance: 5M ohm MIN.
  4. Support 5V/3A
  5. The product is Reach/RoHS compliant.



Item No.	Length(m)
SB0014	1.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑥	External Mold Outer Mould 45P PVC, Black	1PC	
⑤	Connector USB A Male, Nickle-Plated	1PC	
④	External Mold Outer Mould 45P PVC, Black	1PC	
③	Innernal Mold Inner Mould PE	1PC	
②	Connector Type C Male, Nickle-Plated, <b>56KR</b>	1PC	
①	Cable 28+24 USB Cable OD:4.2mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.2PVC Black		



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male to Type C	PAGE NO	1/1
		DATE	2019/05/17
APPROVAL		CHECKED	
		DRAWN	