


PIN OUT


J1	J2
1	1
●	●
●	●
●	●
19	19
SHELL	SHELL

NOTE:

- HDMI2.0a version
- Data Transfer: 18Gbps
- 3840×2160@60Hz resolution
- Operating Temperature:0℃~45℃
- Storage Temperature:-20℃~ 70℃
- ROHS 2.0 and Reach compliant.
- PACKING:1PCS/PE Bag+Label

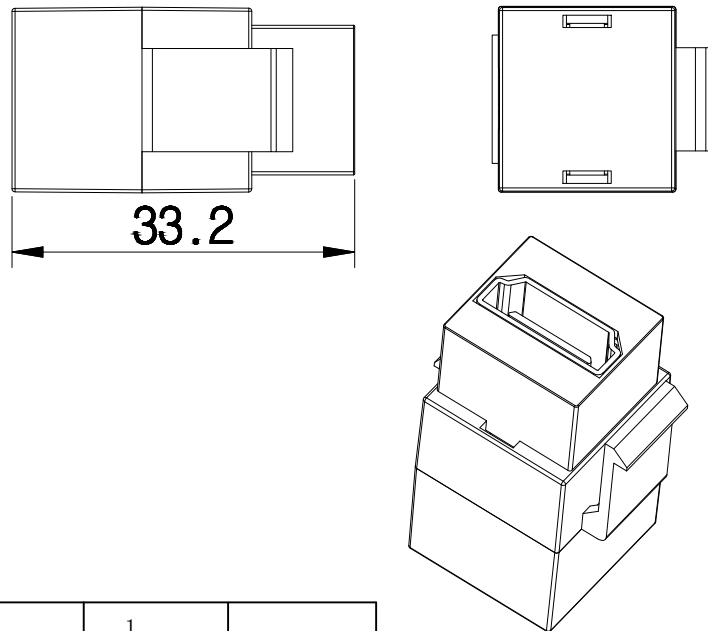

ACT Label Polybag 80x60mm

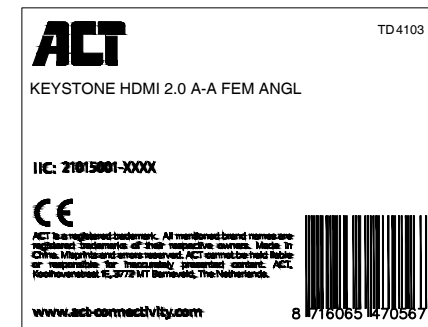

MATERIAL LIST:

②	HDMI HOUSING	ABS WHITE	1	
①	HDMI	HDMI A/F Solder Type,Black PBT Insulation,The Pin Gold Plating, the shell for Gold Plating	2	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	21. May. 2021	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

"#":Matching DIM.
 "*":Important DIM.
 Others General DIM.

GENERAL TOLERANCE OF DIMENSIONS

X:XXX ±0.005
 X:XX ±0.05
 X:X ±0.1

DRAWING	21. May. 2021	AIEI	ACT
CHECK	21. May. 2021	Alvan	
APPROVAL			
	DATE	NAME	ITEM NO. : TD4103
SCALE	1/1 (A4)	UNIT mm	DES. : 255323
	DRAWING NO.	HDMI 2.0a A Female to A Female 90° Angle Keystone Type Adapter	
	DRAWING CLASSIFICATION	S	SHEET 1 OF 1

