


PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL B"



DETAIL B
y: Year; mm: Month
xxxxx: Serial Number



ASSEMBLY CONNECTIVITY	
Side:A- LC/UPC	Side:B- SC/UPC
A	B
B	A

RL8501

LC/UPC-SC/UPC duplex patchcord OM2 1M

IIC: 04015001-P0015774

ACT is a registered trademark. All mentioned brand names are registered trademarks of their respective owners. Rights to the registered Names / Logos / Trademarks / Brands / Service Marks featured are property of and belong to their respective owners. Developed and styled in Europe; made in China. All rights and errors reserved. ACT cannot be held liable or responsible for inaccurately presented content. ACT, Koohovenstraat 1E, 3772 MT Barneveld, The Netherlands. We advise to clean all the connector ferrules for optimal performance. You can find safety information at www.act-connectivity.com/safety

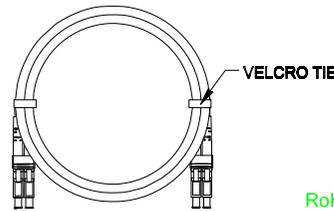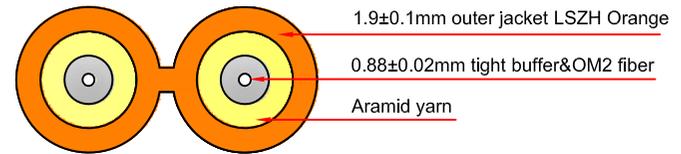

RoHS Complaint

Partnumber	Length	Tolerance
RL8500	0,5M	0/+100mm
RL8501	1M	0/+100mm
RL8551	1,5M	0/+100mm
RL8502	2M	0/+100mm
RL8503	3M	0/+100mm
RL8505	5M	0/+100mm

Partnumber	Length	Tolerance
RL8510	10M	0/+100mm
RL8515	15M	0/+100mm
RL8520	20M	0/+100mm
RL8530	30M	0/+150mm
RL8550	50M	0/+250mm

LC/UPC --- SC/UPC duplex (1.9±0.1)*(4.0±0.2)mm OM2 LSZH Orange

ITEM	Description	Q'TY
1	LC dust cover white	2 PCS
2	LC/UPC MM duplex connector beige	1 PC
3	LC clip beige	1 PC
4	LC short boot white L=19.5±0.5mm	1 PC
5	LC short boot yellow L=19.5±0.5mm	1 PC
6	LC heat-shrink tube white	1 PC
7	LC heat-shrink tube yellow	1 PC
8	Breakout heat-shrink tube black L=15mm	2 PCS
9	Cable lable	1 PC
10	OD=(1.9±0.1)*(4.0±0.2)mm duplex OM2 fiber optical cable LSZH Orange	1 PC
11	SC boot black	1 PC
12	SC boot red	1 PC
13	SC clip beige	1 PC
14	SC/UPC MM simplex connector beige	2 PCS
15	SC dust cover lucency	2 PCS



Designed by:		Audit:	
Date:	2021-06-23	Approve:	
Unit:	mm	Sheet:	A4
Drawing NO:	RL85xx LC/UPC-SC/UPC duplex patchcord OM2-V1		



Product Specification

Standard Compliances

1. ANSI/TIA-568.3-D.
2. ISO 11801 OM1 /IEC60793-2-10 type A1a.
3. Telcordia GR-326-CORE Issue 4 February 2010 Compliance.
4. RoHS Compliance for the Requirement of European Union Issued Directive 2011/6S/EU.

Construction&Characteristics

Optical Performance	Insertion loss typical	0.15dB
	Insertion loss maximum	0.25dB
	Return loss	≥30dB
	Polish	UPC
Connector	Connector A side	IEC61754-20 LC connector
	Connector B side	IEC61754-4 SC connector
	Ferrule	Ceramic Zirconia (ZrO ₂)
Cable	Fiber class	OM2
	Fiber type	Multimode 50/125
	Cable type	(1.9±0.1)*(4.0±0.2)mm LSZH Orange
	Tensile strength	200N (short time 400N)
	Operation temp.	-20 °C to +80 °C (5 cycles)
	Vibration	10 to 55 Hz 15mm double amplitude
Marking	ACT Premium Multimode Fiber Optic Patch cable 50/125µm,OM2,LSZH xxxxM	

100% tested and approved

1. ACT advises to clean every connector ferrule before usage to get optimal performance.
2. Always leave the dust caps on if the cable isn't installed.