


Customer Drawing

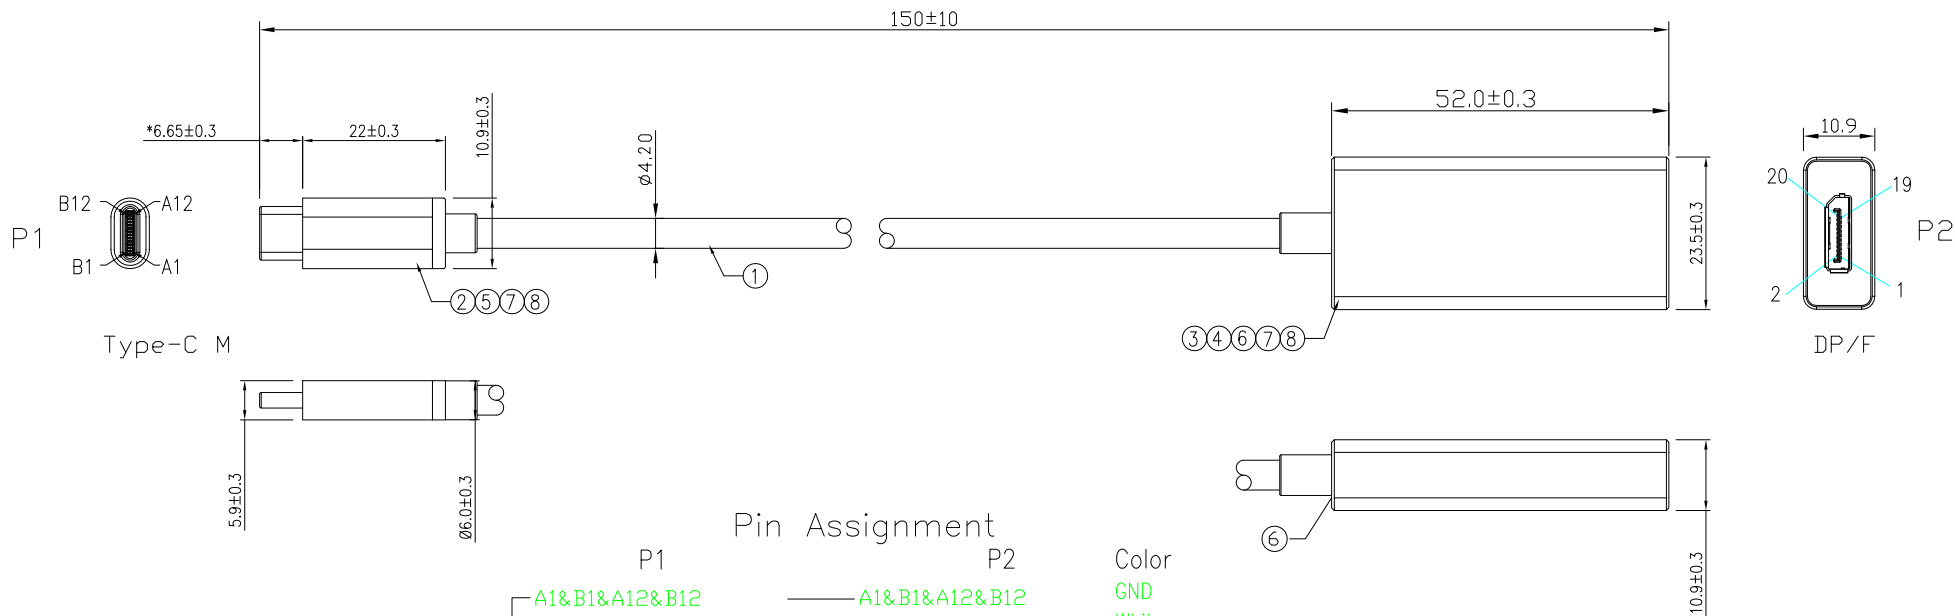

Pin Assignment		Color
P1	P2	
A1&B1&A12&B12	A1&B1&A12&B12	GND
B11	B11	White
B10	B10	Brown
A5	A5	Green
B8	B8	Black
B5	B5	Yellow
B3	B3	White
B2	B2	Black
A4&B4&A9&B9	A4&B4&A9&B9	Red
A11	A11	White
A10	A10	Red
A8	A8	Blue
A7	A7	White
A6	A6	Green
A3	A3	White
A2	A2	Blue

Note: (USB3.1 Type C to DP for real-time detection)  
 1.Signal Source Resolution DP:1280\*720P,1290\*1080P,3840\*2160  
 2.Refresh Rate:60HZ  
 3.Product 100% test without signal jitter , shadow dragging , double image and color deficiency.  
 4.Signal attenuation test: connection to 5m cable.

NO.	NAME	SPEC DESCRIPTION	QTY	UNIT
8	Overmold	Polyvinyl Chloride 45P White	18	g
7	Innermold	Low density transparent PE adhesive	10	g
6	AL Shell	DP Shell:52*23.5*10.9mm Silvery AL6063 COLOUR GRAY	1	SET
5	AL Shell	Type-C Shell:22*10.9*5.9mm Silvery AL6063 COLOUR GRAY	1	SET
4	Baffle	DP Cover:ABS White	1	SET
3	PCBA	DP PCBA:anx7402 CONN DP20Pin,Au-Plated,	1	PCS
2	Conn	USB 3.1 C Type,Insulation PBT White,Contact Pin G/F,Shell Ni-Plated,With Capacitance	1	PCS
1	Cable	USB3.1 Cable(1P #32+D+AM)*4+#32*1P+#32*3C+#32*1C+AE+B(75% ALB) White OD:4.20±0.1mm	0.15	M

Name		USB C male to DP Female Cable		Version		Marked		Change Contents		Date	
Part NO.		SB0021		A0		---		INITIAL		2018/10/10	
Develop series NO.											
File NO.	CHMM-3E-XX	Unit:(mm)	Drawing:(A4)	VERSION	MARKED	CHANGE	CONTENTS	DATE			
Scale	1:1	X.	±5								
Page	1 OF 1	X.X	±1.5								
Third angle projection		X.XX	±0.50								
		X.X°	±2°								
		X.XX°	±1°	Approval	Check	Draw	Design				
		X.XXX°	±0.5°								



TEL:86-789-8533 8274  
 8530 9974  
 FAX:86-789-8533 8284