


RoHS CompliantU

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/08/28	

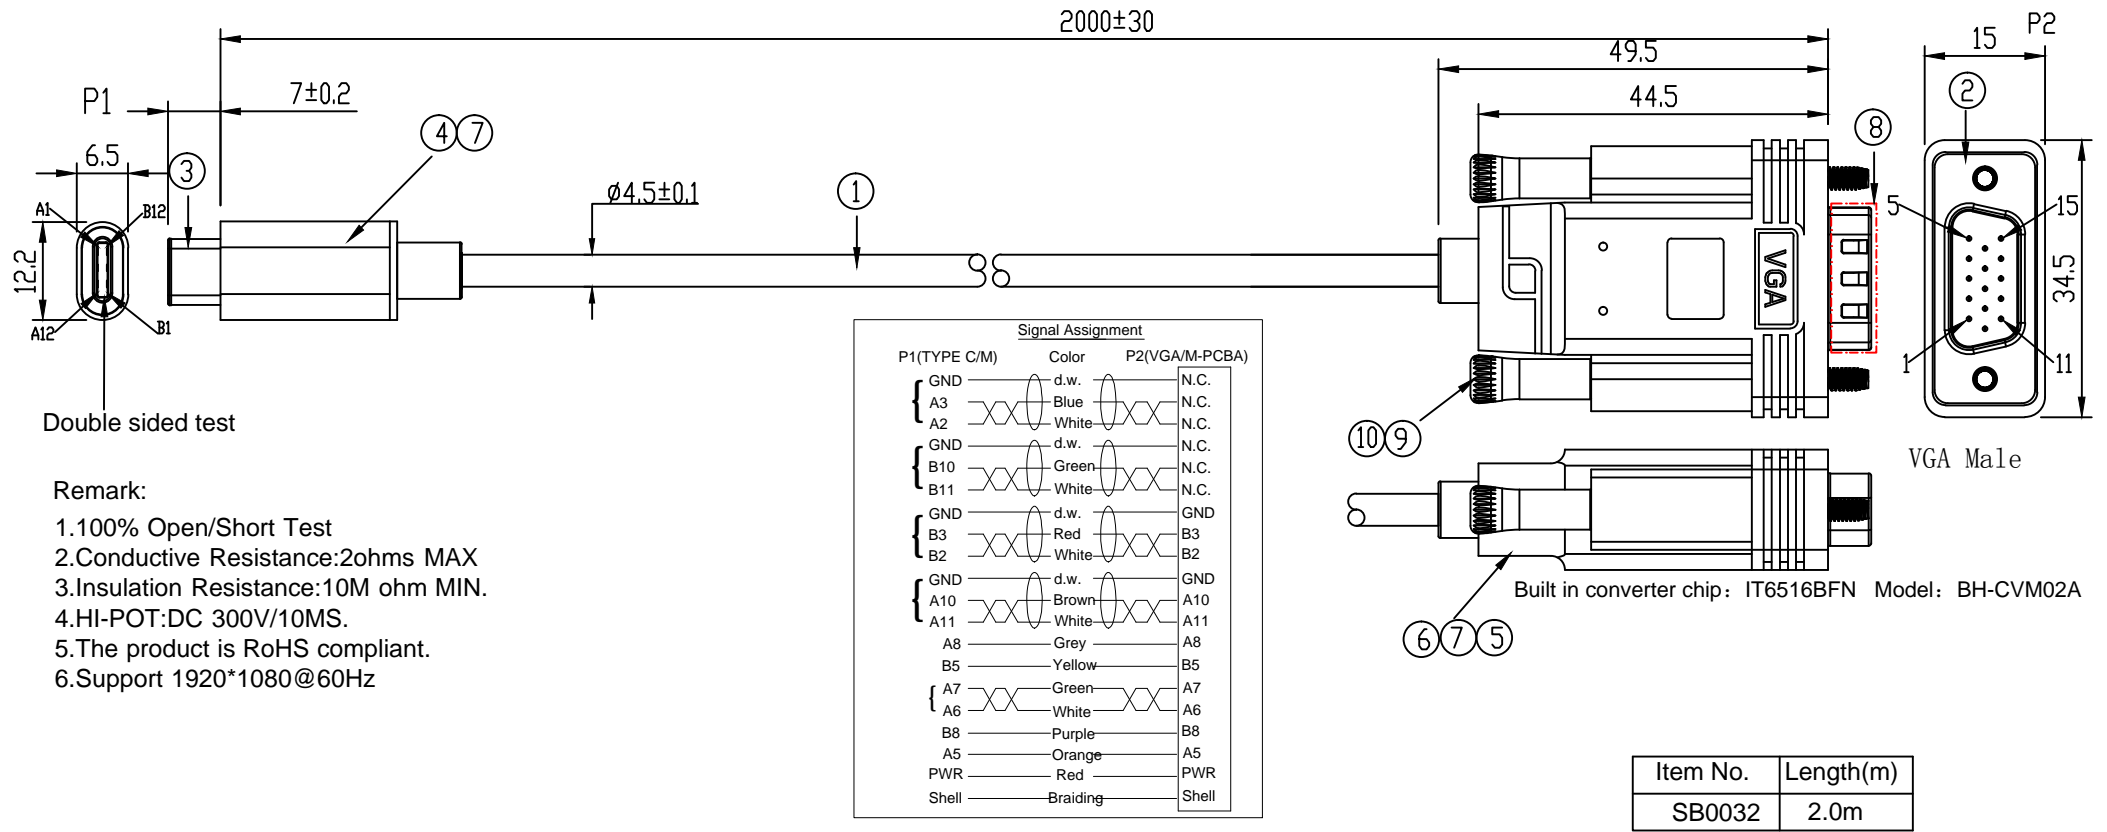

Remark:

- 100% Open/Short Test
- Conductive Resistance:2ohms MAX
- Insulation Resistance:10M ohm MIN.
- HI-POT:DC 300V/10MS.
- The product is RoHS compliant.
- Support 1920*1080@60Hz

Item No.	Length(m)
SB0032	2.0m

⑩	PVC	PVC,Black,30P		
⑨	SCR	Screw:φ2.3*50mm	2PCS	
⑧	LID	PE	1PC	
⑦	Innernal Mold	PE		
⑥	External Mold	PVC,Black,45P		
⑤	PCBA	PCBA:BH-CVM02A CHIP:IT6516BFN	1PC	
④	Shell	21mm Type C Shell, Black	1PC	
③	Connector	Type C 3.1 Male, Gold-Plated	1PC	
②	Connector	VGA Male, Gold-Plated	1PC	
①	Cable	(32# AWG*1P+D+AL)*4+32#*1PR+32#*4C+24#*1C +AB 144/0.06TC OD:4.5 mmPVC,Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED

X. = ±1
 .X = ±0.2
 .XX = ±0.1

		ERP NO.:		SAMPLE DWG NO.:	
		DOC No.:		REVISION	A0
CUSTOMER:			UNIT	mm	
CUSTOMER P/N:		SB0032	SCALE	NO	
DESCRIPTION		Type C to VGA Male	PAGE NO	1/1	
			DATE	2018/08/28	
APPROVAL		CHECKED		DRAWN	