

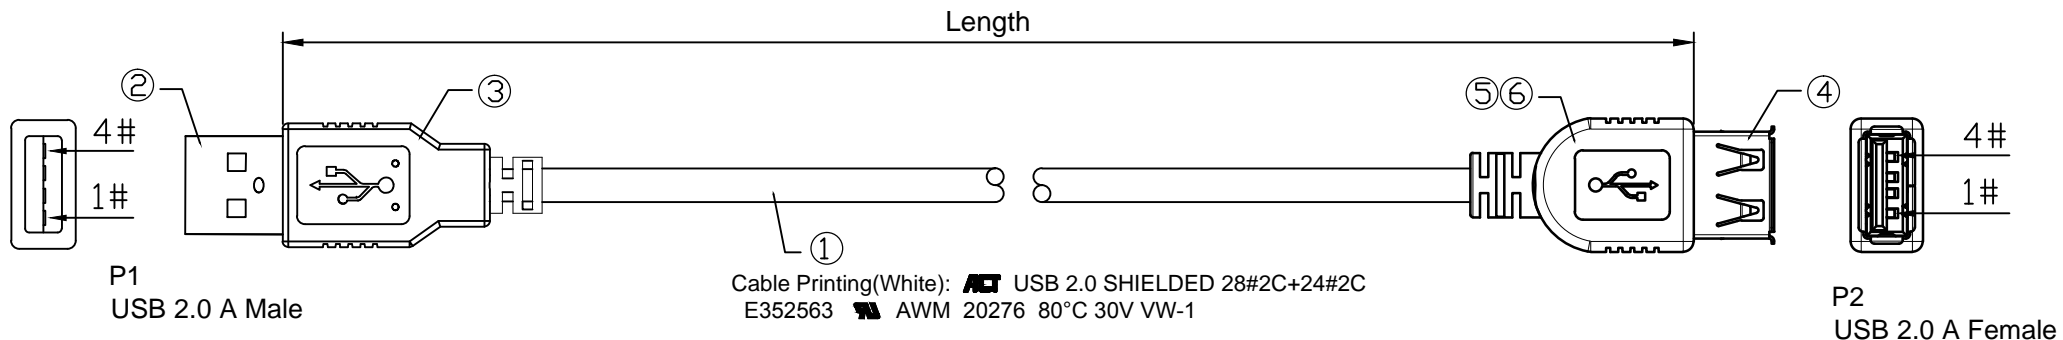


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/02/13	

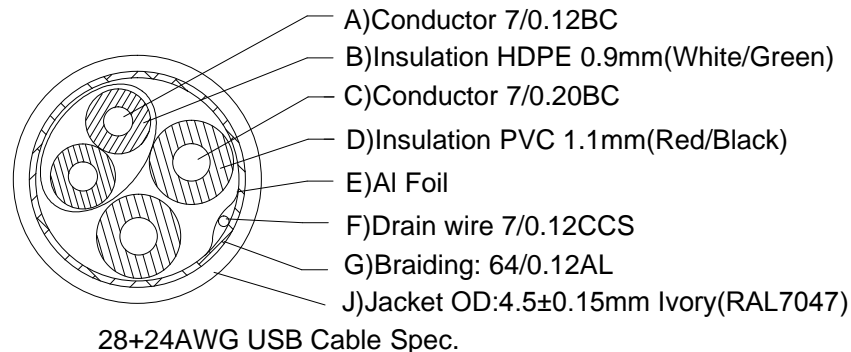


Remark:
 1.100% Open/Short Test
 2.Conductive Resistance:10ohms MAX
 3.Insulation Resistance:5M ohm MIN.
 4.The product is Reach/RoHS compliant.

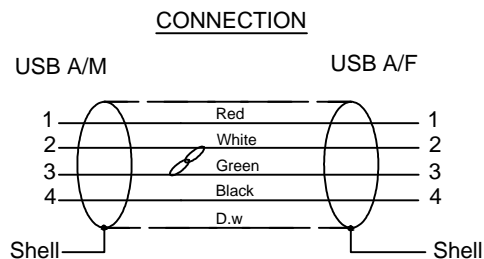





Item NO.	Length(m)
SB2199	1.0m
SB2200	1.8m
SB2203	3.0m
SB2205	5.0m

⑥	External Mold	Outer Mold 45P PVC, Ivory(RAL7047)	1PC	
⑤	Internal Mold	Inner Mold PE	1PC	
④	Connector	USB A Female, Nickle-Plated	1PC	
③	External Mold	Outer Mold 45P PVC, Ivory(RAL7047)	1PC	
②	Connector	USB A Male, Nickle-Plated	1PC	
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC Ivory(RAL7047)		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO A Female	PAGE NO	1/1
		DATE	2020/02/13
APPROVAL		CHECKED	
		DRAWN	

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/01/27	

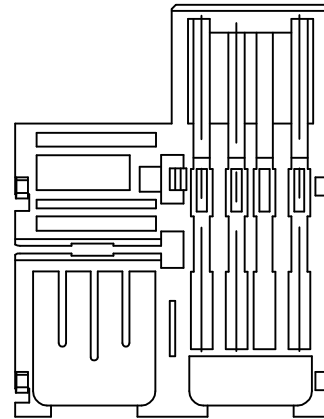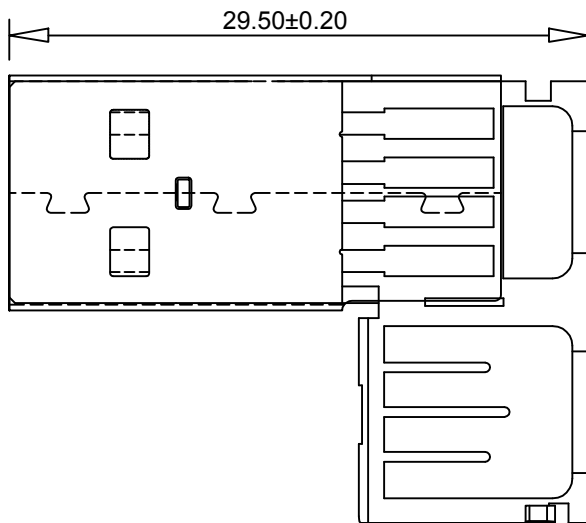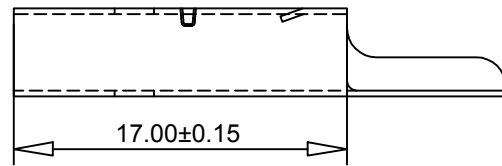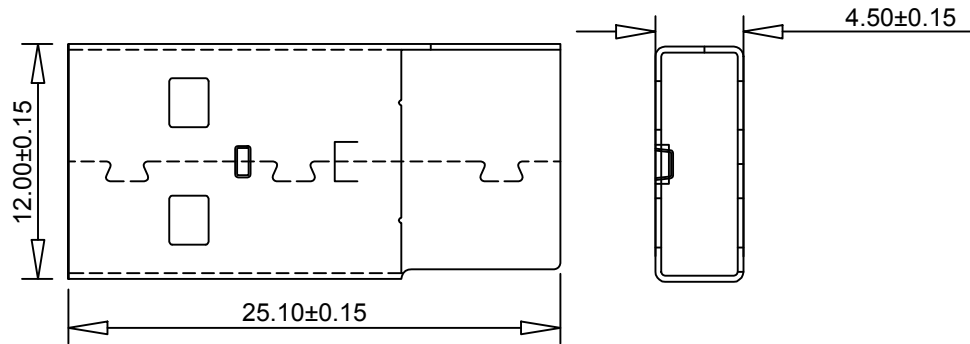

ERP NO.:		SAMPLE DWG NO.:	
ACT No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
		DATE	2021/04/14
APPROVAL		CHECKED	
		DRAWN	