
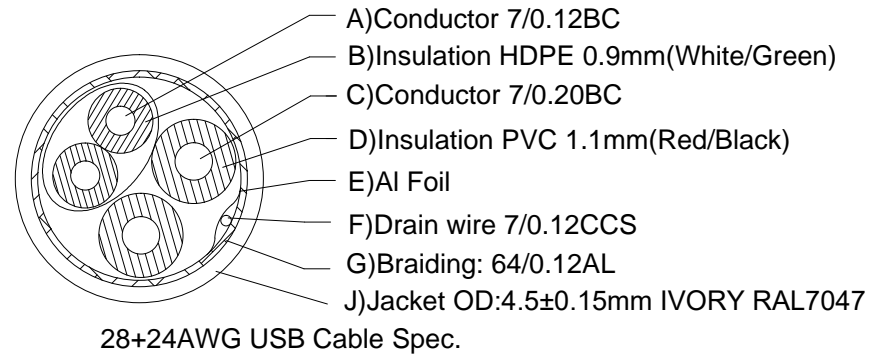
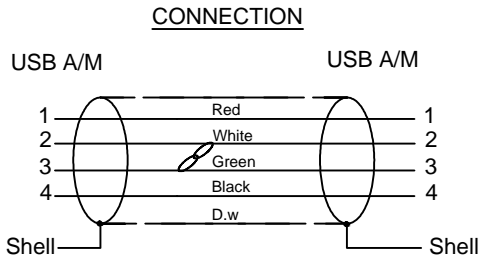



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/08/10	

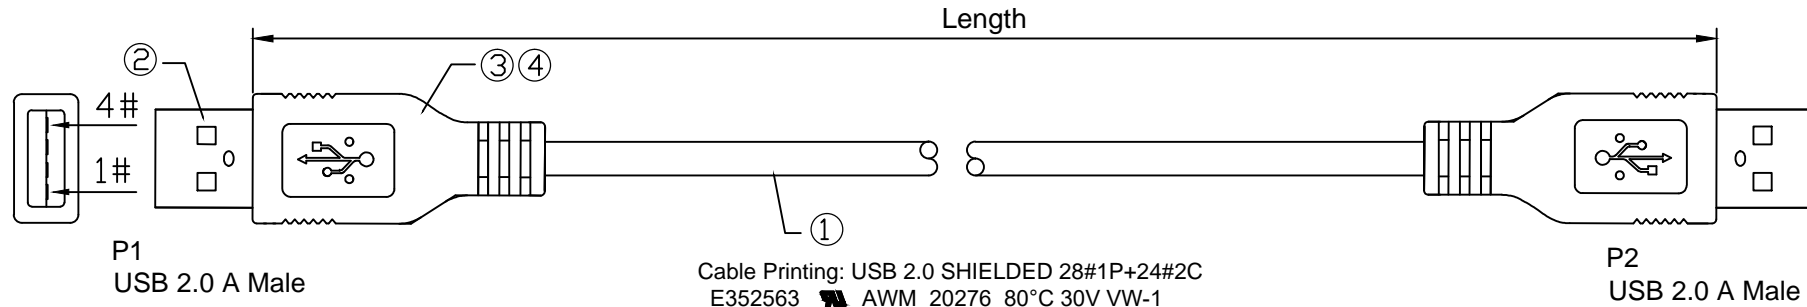

Remark:  
 1.100% Open/Short Test  
 2.Conductive Resistance:2ohms MAX  
 3.Insulation Resistance:5M ohm MIN.  
 4.The product is Reach/RoHS compliant.

Item NO.	Length(m)
SB2502	2.0m
SB2503	3.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
③	External Mold Outer Mould 45P PVC, IVORY RAL7047	2PCS	
②	Connector USB A Male, Nickle-Plated	2PCS	
①	Cable 28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC IVORY RAL7047		



<b>ACT</b>			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO A Male	PAGE NO	1/1
		DATE	2018/08/10
APPROVAL		CHECKED	
		DRAWN	