
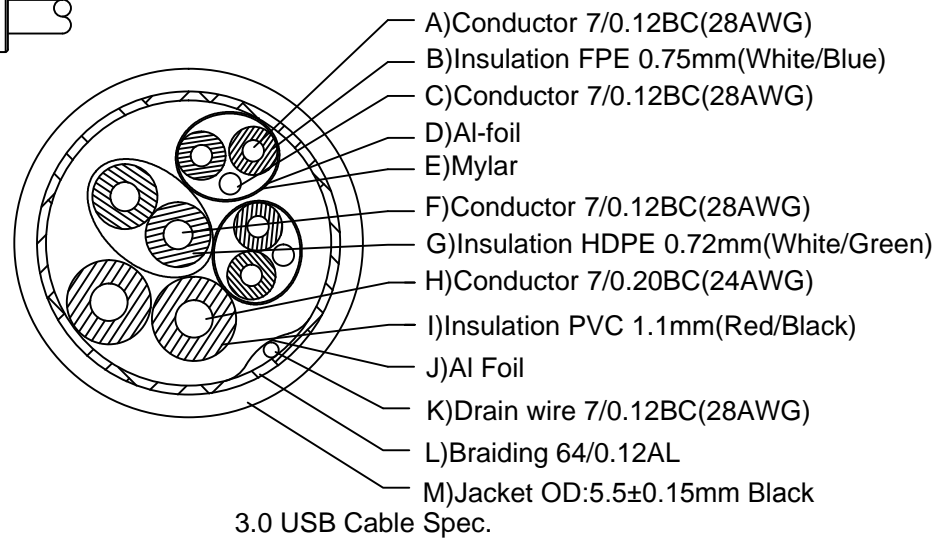
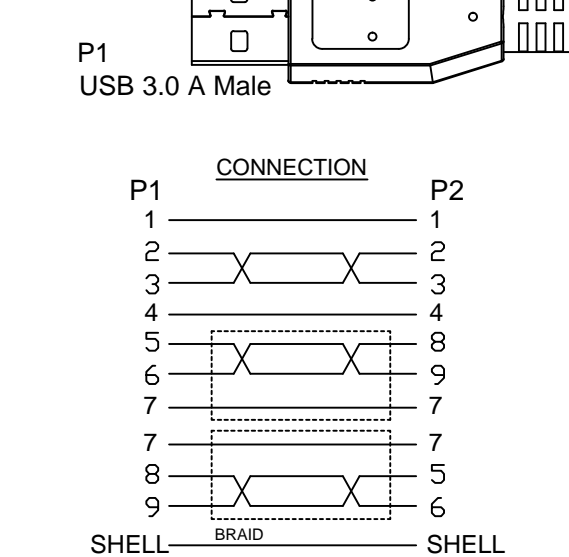



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2019/04/28	

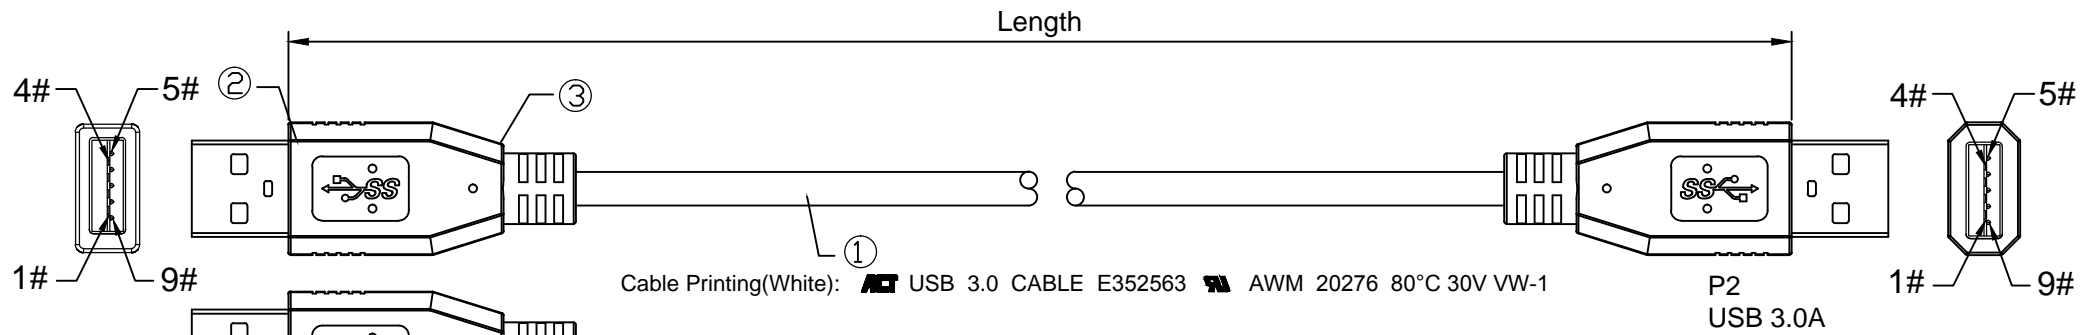

Remark:
 1.100% Open/Short Test
 2.Conductive Resistance:2ohms MAX
 3.Insulation Resistance:5M ohm MIN.
 4.The product is Reach/RoHS compliant.

Item NO.	Length
SB0001	3.0m
SB3010	0.5m
SB3011	1.0m
SB3013	2.0m

③	External Mold	Outer Mould 35P PVC, Black	2PCS	
②	Connector	USB 3.0 A Male w/ Can-Shielding, Nickel-Plated	2PCS	
①	Cable	[(7/0.12BC+FPE)*1P+D+AL+Mylar]*2C+(7/.012BC+HDPE)*1P + (7/0.20BC+PVC)*2C+7/0.12BC+AL+D+B+OD5.5PVC Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ACT		ERP NO.:		SAMPLE DWG NO.:	
		DOC No.:		REVISION	A0
		CUSTOMER:		UNIT	mm
		CUSTOMER P/N:		SCALE	NO
		DESCRIPTION	28+28+24 USB 3.0 A Male to USB 3.0 A Male	PAGE NO	1/1
				DATE	2019/04/28
APPROVAL		CHECKED		DRAWN	