


PIN OUT

A1	—	A1	B1	—	B1
A2	—	A2	B2	—	B2
A3	—	A3	B3	—	B3
A4	—	A4	B4	—	B4
A5	—	A5	B5	—	B5
A6	—	A6	B6	—	B6
A7	—	A7	B7	—	B7
A8	—	A8	B8	—	B8
A9	—	A9	B9	—	B9
A10	—	A10	B10	—	B10
A11	—	A11	B11	—	B11
A12	—	A12	B12	—	B12


NOTES:

1. Electrical test:

- (1). 100% open short & miss wire test;
  - (2). Insulation resistance: DC 300V 10MΩ Min;
  - (3). Contact resistance: 3Ω Max;
- Data Transfer: 10Gbps Voltages: 5V Current: 3A,  
 (Only TYPE C single-sided output is supported)  
 RoHS 2.0 and REACH Compliant;  
 Packing: 1PCS/PE Bag+Label

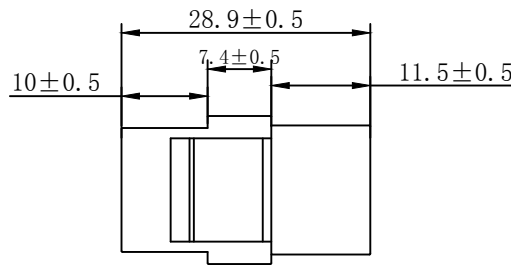

ACT Label Polybag 80x60mm

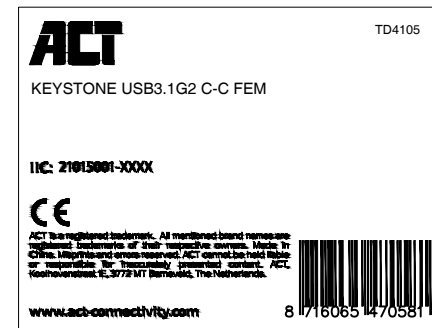

ITEM NO. :	ITEM NO. :	Color
	255332S	Black
TD4105	255332	White

MATERIAL LIST:

②	Housing	ABS	1	
①	Connector	USB C Female, Black insulation The Pin Gold Plating, the Shell For Nickel plating	2	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	21. May. 2021	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

#": Matching DIM. *": Important DIM. Others General DIM.  GENERAL TOLERANCE OF DIMENSIONS  X:XXX ±0.005 X:XX ±0.05 X:X ±0.1	DRAWING	21. May. 2021	wbs	<b>ACT</b>
	CHECK	21. May. 2021	Alvan	
APPROVAL				
SCALE		1/1 (A4)	UNIT mm	ITEM NO. : TD4105
DRAWING NO.		DES. : 255332		
DRAWING CLASSIFICATION		SHEET 1 OF 1		04