

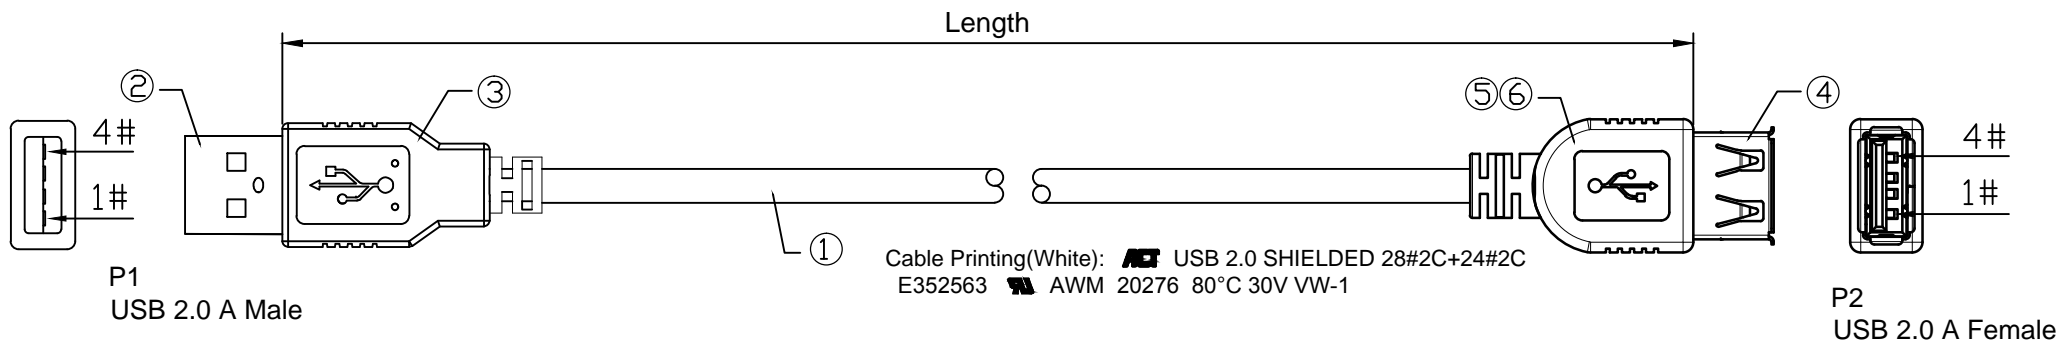


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/12/03	

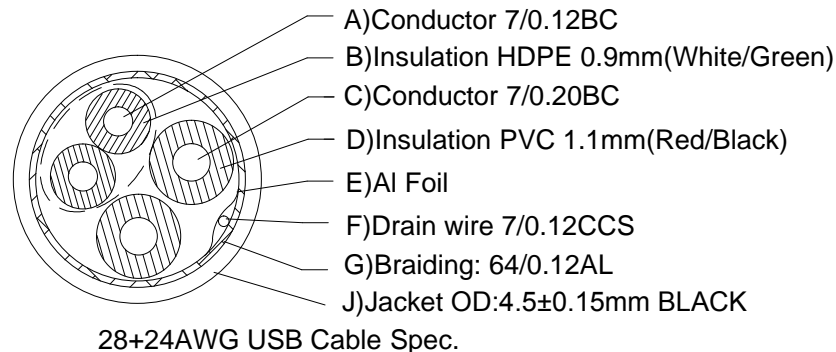


Cable Printing(White): USB 2.0 SHIELDED 28#2C+24#2C  
E352563 AWM 20276 80°C 30V VW-1

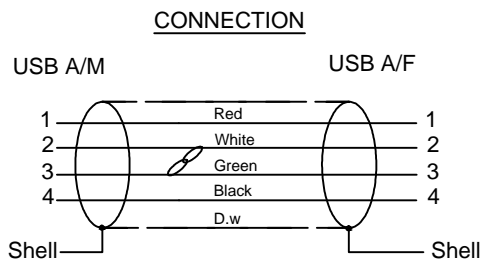

Remark:  
 1.100% Open/Short Test  
 2.Conductive Resistance:10ohms MAX  
 3.Insulation Resistance:5M ohm MIN.  
 4.The product is Reach/RoHS compliant.

Item NO.	Length(m)
EW9624	1.8m
AC3040	1.8m
EW9622	3.0m
AC3043	3.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑥	External Mold	Outer Mould 45P PVC, BLACK	1PC
⑤	Innernal Mold	Inner Mould PE	1PC
④	Connector	USB A Female, Nickle-Plated	1PC
③	External Mold	Outer Mould 45P PVC, BLACK	1PC
②	Connector	USB A Male, Nickle-Plated	1PC
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC BLACK	



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO A Female	PAGE NO	1/1
		DATE	2021/12/03
APPROVAL		CHECKED	
		DRAWN	