

Page 1 of 1

DRAWN 14.08.2019 BY RKT

**AK5268** 

PC2048

**CABLE REQUIREMENTS:** 

Colour: BLACK

**Type:** 3 Core 1.00mm<sup>2</sup> H05VV-F

(European Approved)

**Conductor Colour Codes:** 

Earth (Green & Yellow)

Neutral (Blue) Live (Brown

Complete Powerlead Rated: 10A/250V

**PLUG / END A REQUIREMENTS:** 

Type: SG03D

Colour: BLACK

Rating: 10A

Reference:

C14 Connector (UK Approved)

**CONNECTOR / END B REQUIREMENTS:** 

Type: SG597D

Colour: BLACK

Rating: 10A


Reference:

D/A C13 IEC Lock+ Connector

(European Approved)



Downwards Angle 90 degrees

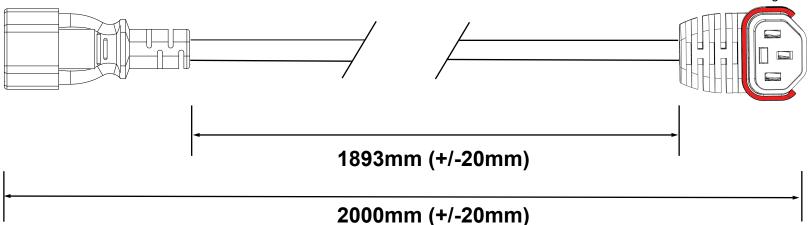

**EXTRA REQUIREMENTS:** 

**COMMENTS:** 

PACKAGING OUTER ......TBC
PIN PROTECTING COVER .....NO
WIRING INSTRUCTIONS .....NO
PRE-SHIPMENT INSPECTION REQUIRED....NO

CHANGE MANAGEMENT:

HANKING

Fig.8 (200mm) **TERMINATIONS / FURTHER COMMENTS:**