



| REV. | REVISION | DATE |
|------|----------|------|
| | | |

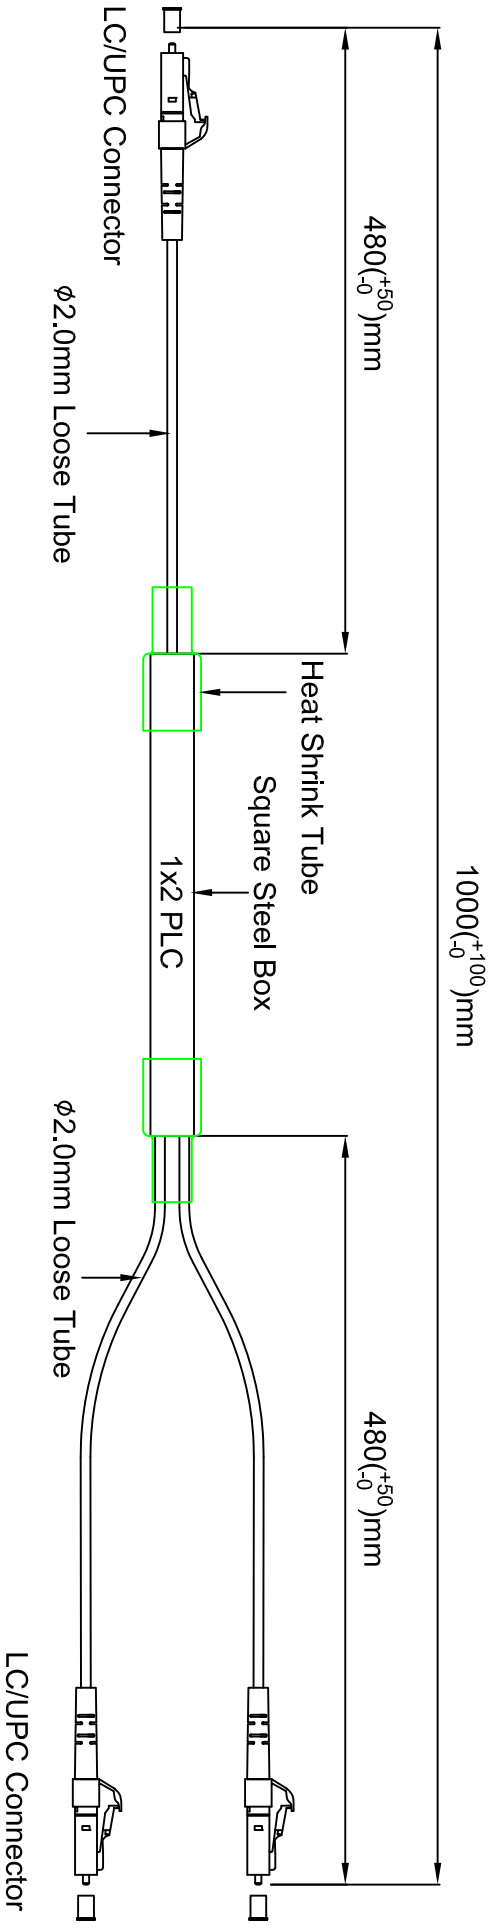

NOTE: 1. Fiber Type: G657A
2. Square Steel Box: 4X4X40mm

| | | | |
|---|------------|------------------|-------------------|
| CUSTOMER APPROVAL: | | DATE: | |
| ATG | | | |
|  | UNIT: | TITLE: | |
| | mm | 1X2 PLC | |
| DRAWN BY | DATE | CUSTOMER | CUSTOMER PART NO. |
| Vernon | 2017/05/31 | | |
| CHECKED BY | DATE | DRAWING NO. | REV. |
| W/ale | 2017/05/31 | | |
| APPROVED BY | DATE | Ref. NO. | |
| David | 2017/05/31 | FA2042 | A |
| SALE BY | DATE | TRENDEX PART NO. | |
| | | | |

Product Specification

Package Dimensions

Square Steel Box:4X4X40mm

Optical Performance

| Parameter | Unit | Specification |
|-----------------------|------|------------------|
| Operating Wavelength | nm | 1280 ~ 1650 |
| Type | | 1x2 |
| Insertion Loss. | dB | <4.0 |
| Uniformity | dB | <0.6 |
| PDL | dB | <0.2 |
| Directivity | dB | 55 |
| Return Loss | dB | 55(50) |
| Operating Temperature | °C | -40~ +85 |
| Storage Temperature | °C | -40 ~ +85 |
| Fiber length | | 1m |
| Fiber Type | | G657A |
| Connector Type | | LC/UPC Connector |
| Power Handling | mW | 300 |

Note: Measured at room temperature and excludes connector loss.