
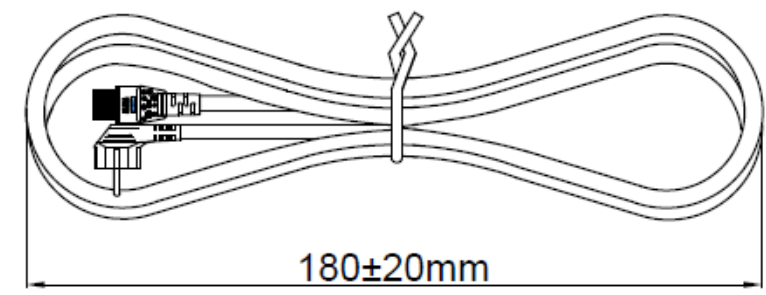
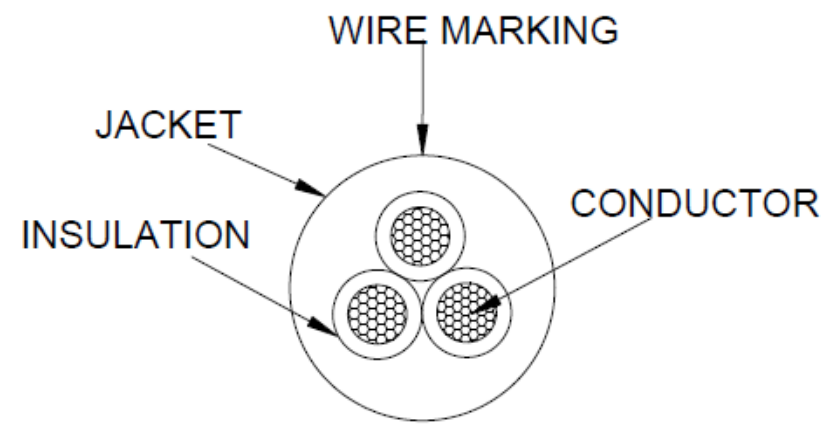


CUSTOMER NAME	
CUSTOMER Part No.	AC3310

DATE	REV	DESCRIPTION	BY
2020.09.30	A/0	NEW	

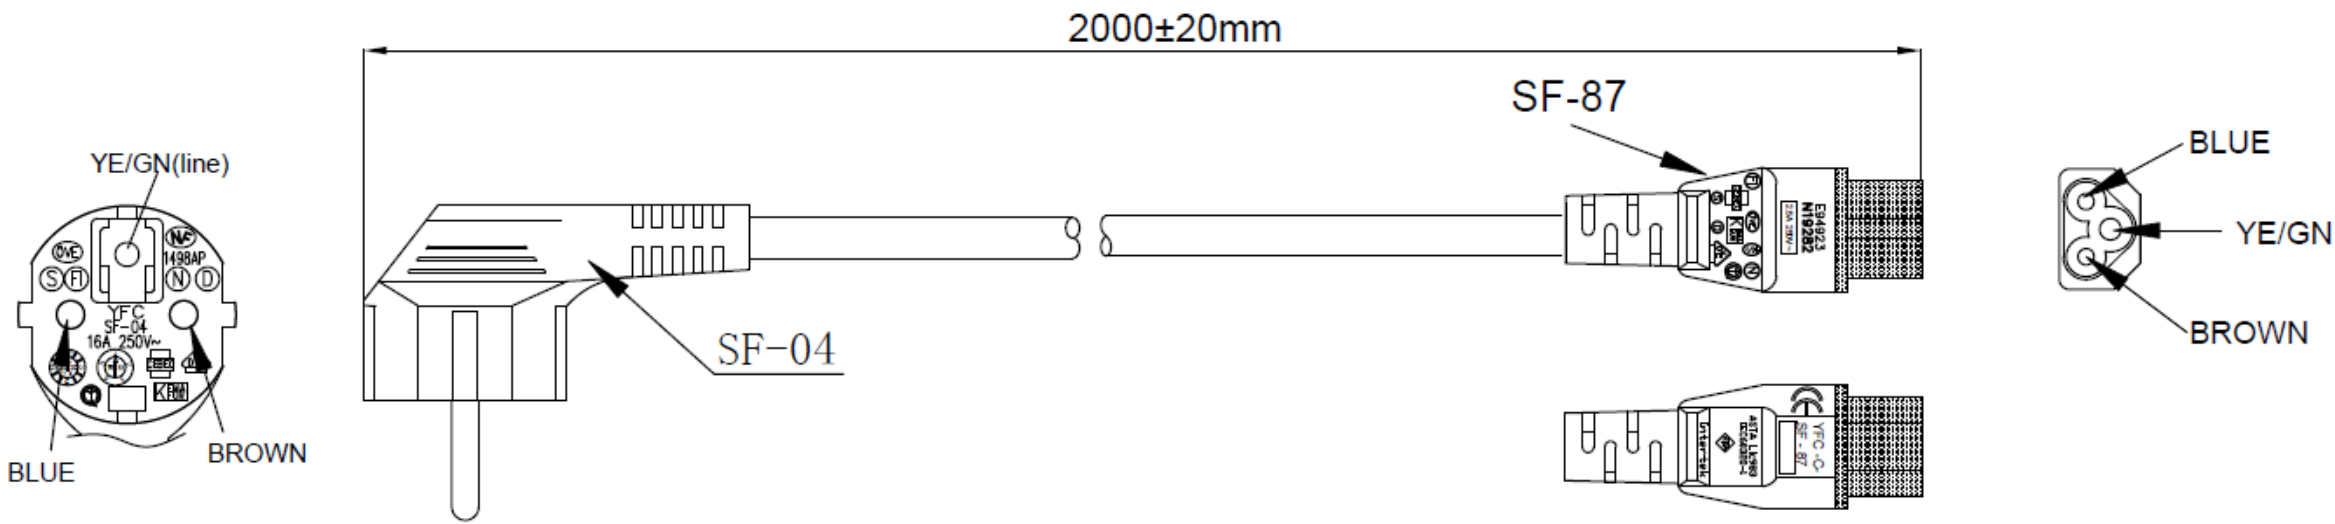

REMARKS:

- 1.DVW TEST:2000VAC,1S
- 2.POLARIZATION AND CONTINUITY TEST
- 3.PLUG (SF-04) RATED POWER:250V 16A
- 4.CONNECTOR (SF-87) RATED POWER:250V 2.5A
- 5.WIRE: H05VV-F 3G0.75mm² RATED VOLTAGE:300/500V
- 6.COLOR: BLACK

WIRE MARKING: (Hollow) NO.129		+ 0 + 0 + 0 KEMA-KEUR CEBC 972 <vde> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM ² V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE						
Key Size		3RD						
Length (mm)	Tolerance							
	Critical	Normal	General					
0-15	±0.05	±0.10	±1.0					
15-60	±0.10	±0.20	±1.5					
60-150	±0.15	±0.35	±2.0					
150-350	±0.20	±0.50		Part No.	SF-04+SF-87 H05VV-F 3G0.75mm ²			
350-1000	±0.40	±0.65		UNIT	mm	APPROVAL	CHECKER	DRAWER
				PAGE	1/2			
				Draw.No.				

