



**ELECTRICAL TEST:**


- 1.100% OPEN SHORT MIS WIRE TEST
- 2.CONTACT RESISTANCE:5 OHM MAX
- 3.INSULATION RESISTANCE:5M OHM MIN
- 4.HI-POT TEST:DC 300V/10ms
- 5.PASS 4K@60HZ TEST

ITEM	LENGTH(mm)
AC3903	3000±30
AC3900	1000±30

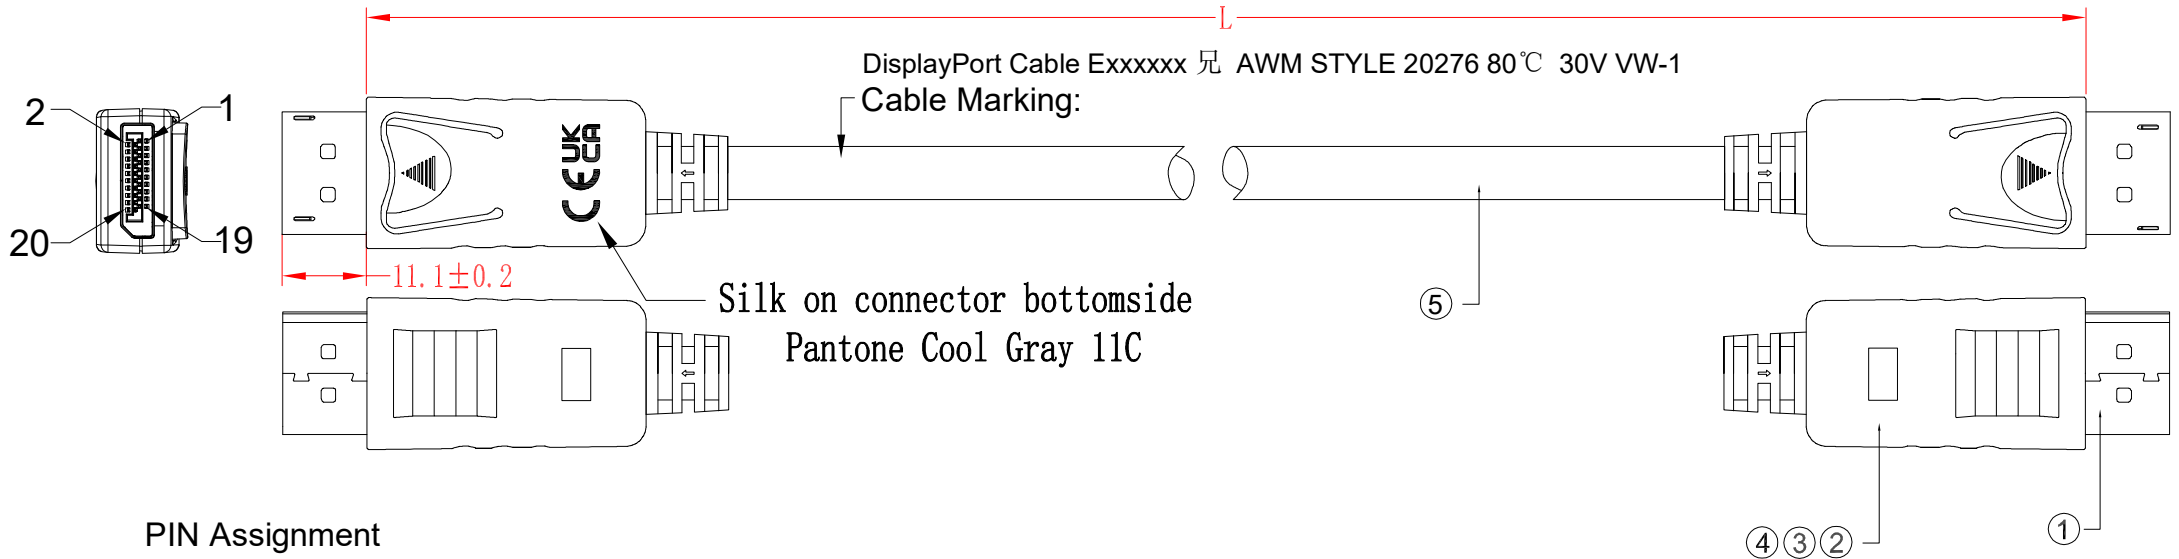

Silk:Pantone Cool Gray 11C  
13mm\*5mm

**PIN Assignment**

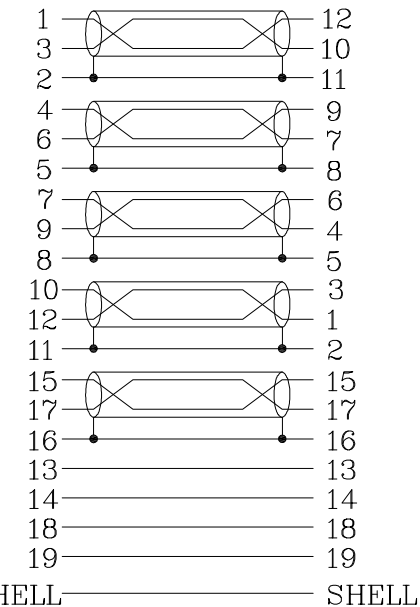

⑤	CABLE	(1/0.254BC*1P+D1/0.254TCCS+AL-Foil+ADHESIVE PET)*5P +1/0.254BC*4C+AL-Foil+B144/0.12AM Black PVC Jacket OD:6.3±0.2mm	m	
④	SHELL	Black ABS SHELL	2PCS	
③	MODEL	Black 45P PVC	20g	
②	MODEL	PE,Nature color	10g	
①	plug	DP M 20P PIN:G/F,SHELL: Gold plated	2PCS	
PART NAME		DESCRIPTION		QTY

<b>ACT</b>				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
APPROVED	CHECKED	DRAWING	DESIGNED	MODEL NO.	AC39xx	△		2021/08/02	A5
				DRAWING NO.		△		2021/11/30	A6
				FINISHING		△		2020/10/12	A1
				MATERIAL		SYM	DATE		REVISION