



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/10/21	

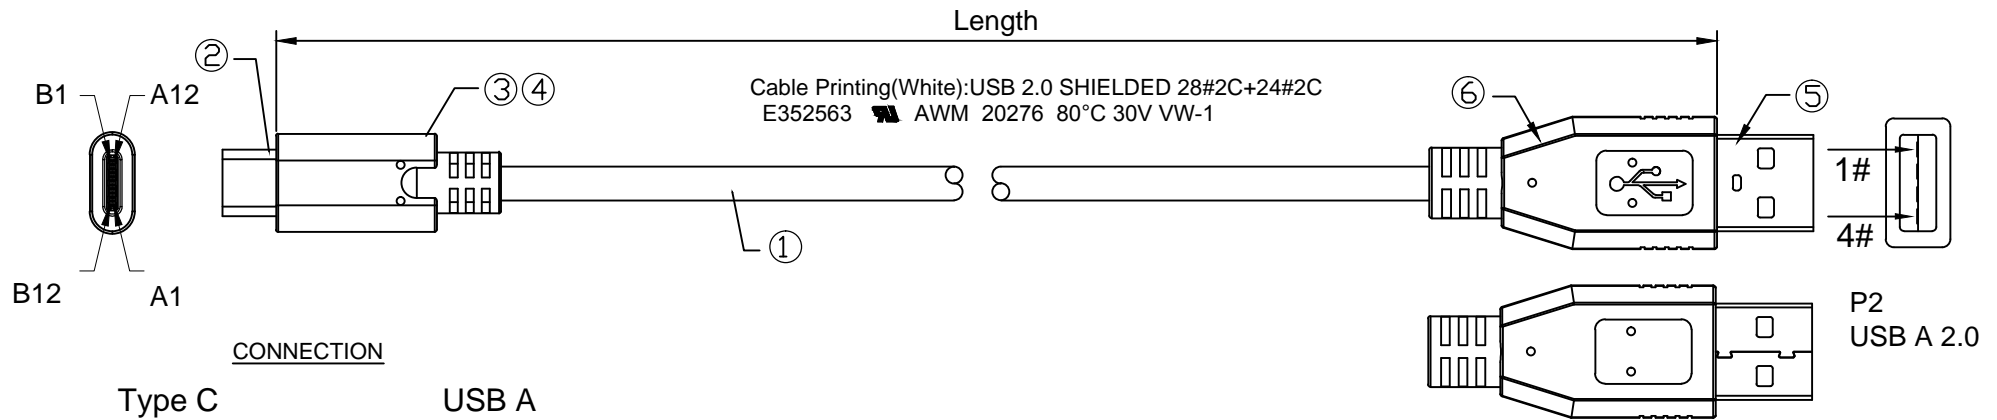

CONNECTION

Type C	USB A
Vbus A4,B4,A9,B9	1 Vbus
GND A1,B1,A12,B12	4 GND
D+ A6	3 D+
D- A7	2 D-
SHELL BRAID	SHELL

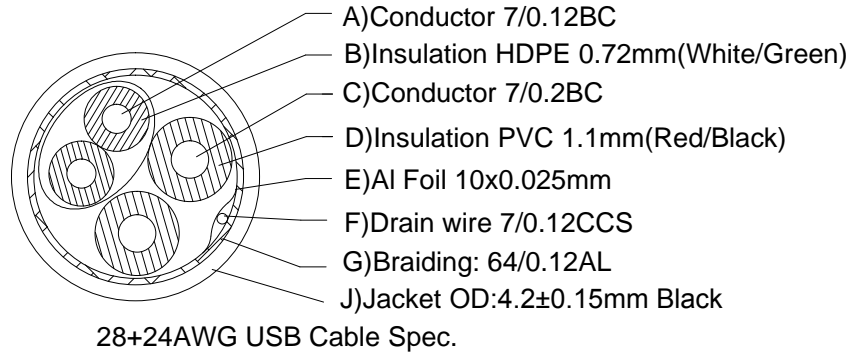


- Remark:
- 100% Open/Short Test
 - Conductive Resistance: 2ohms MAX
 - Insulation Resistance: 5M ohm MIN.
 - Support 5V/3A
 - The product is Reach/RoHS compliant.



Item No.	Length(m)
EW9641	1.0m
AC7350	1.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑥	External Mold	Outer Mould 45P PVC, Black	1PC
⑤	Connector	USB A Male, Nickle-Plated	1PC
④	External Mold	Outer Mould 45P PVC, Black	1PC
③	Inernal Mold	Inner Mould PE	1PC
②	Connector	Type C Male, Nickle-Plated, 56KR	1PC
①	Cable	28+24 USB Cable OD:4.2mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.2PVC Black	



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male to Type C	PAGE NO	1/1
		DATE	2021/10/21
APPROVAL		CHECKED	
		DRAWN	