
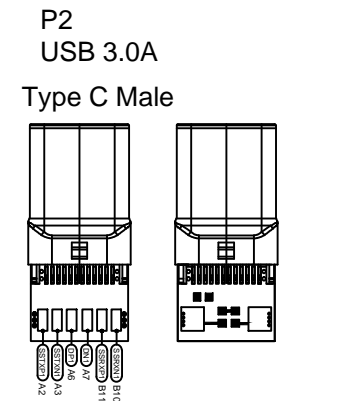
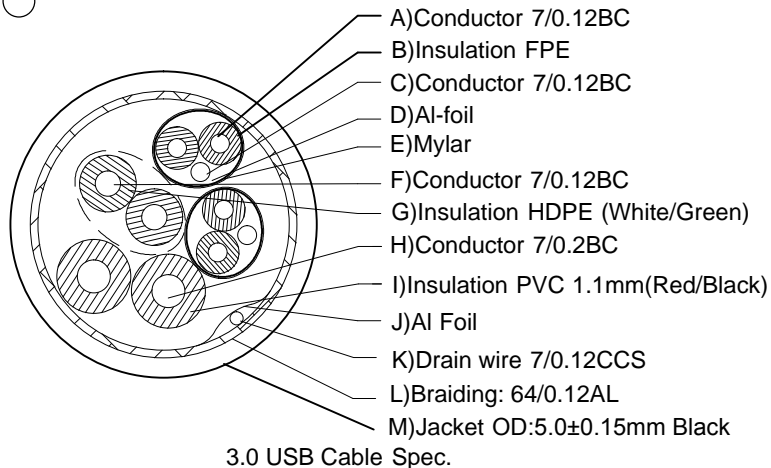
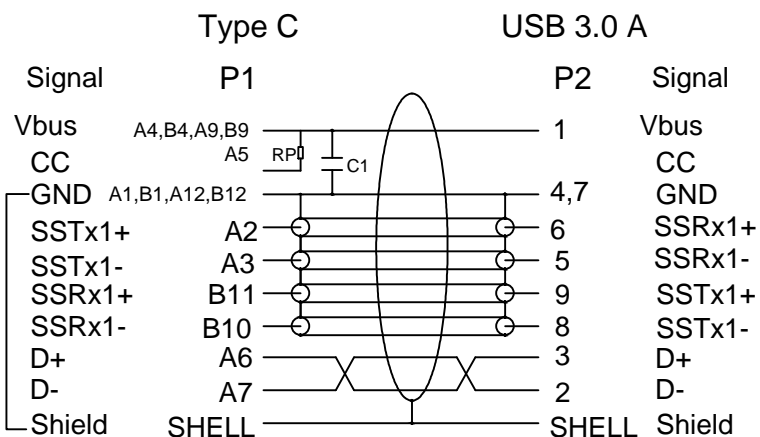



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/10/19	

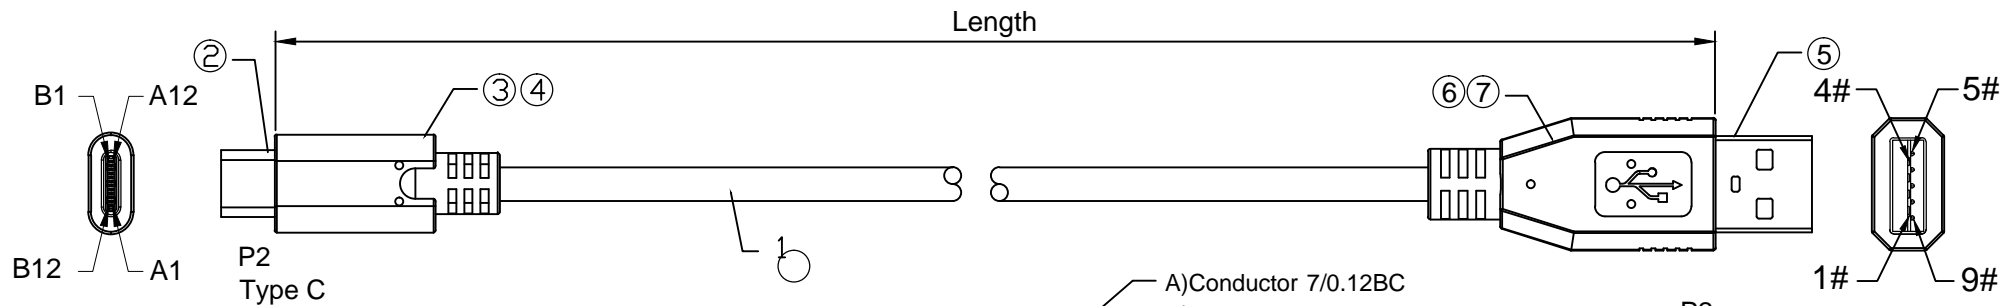

Remark:
 1.100% Open/Short Test
 2.Conductive Resistance:15ohms MAX
 3.Insulation Resistance:5M ohm MIN.
 4.The product is Reach/RoHS compliant.

Item No.	Length(m)
AC3020	1.0m
AC7370	1.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑦	External Mold	Outer Mould 35P PVC, Black	1PC
⑥	Inernal Mold	Inner Mould PE	1PC
⑤	Connector	USB 3.0 A Male, Nickle-Plated	1PC
④	External Mold	Outer Mould 35P PVC, Black	1PC
③	Inernal Mold	Inner Mould PE	1PC
②	Connector	USB 3.0 Type C Male, Nickle-Plated	1PC
①	Cable	[(7/0.12BC+FPE)*1P+D+AL+Mylar]*2C+ (7/.012BC+HDPE)*1P + (7/0.20BC +PVC)*2C+AL+7/0.12CCS+64/0.12ALB +OD5.0PVC Black	



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	USB 3.0 USB 3.0A - Type C Male	PAGE NO	1/1
		DATE	2021/10/21
APPROVAL	CHECKED	DRAWN	