



| | |
|-------------------|--------|
| 1 | 2 |
| CUSTOMER NAME | |
| CUSTOMER Part No. | AK5018 |

| | | | |
|------------|-----|-------------|-----|
| 7 | 8 | 9 | 10 |
| DATE | REV | DESCRIPTION | BY |
| 2015.02.28 | A/0 | NEW | JFL |

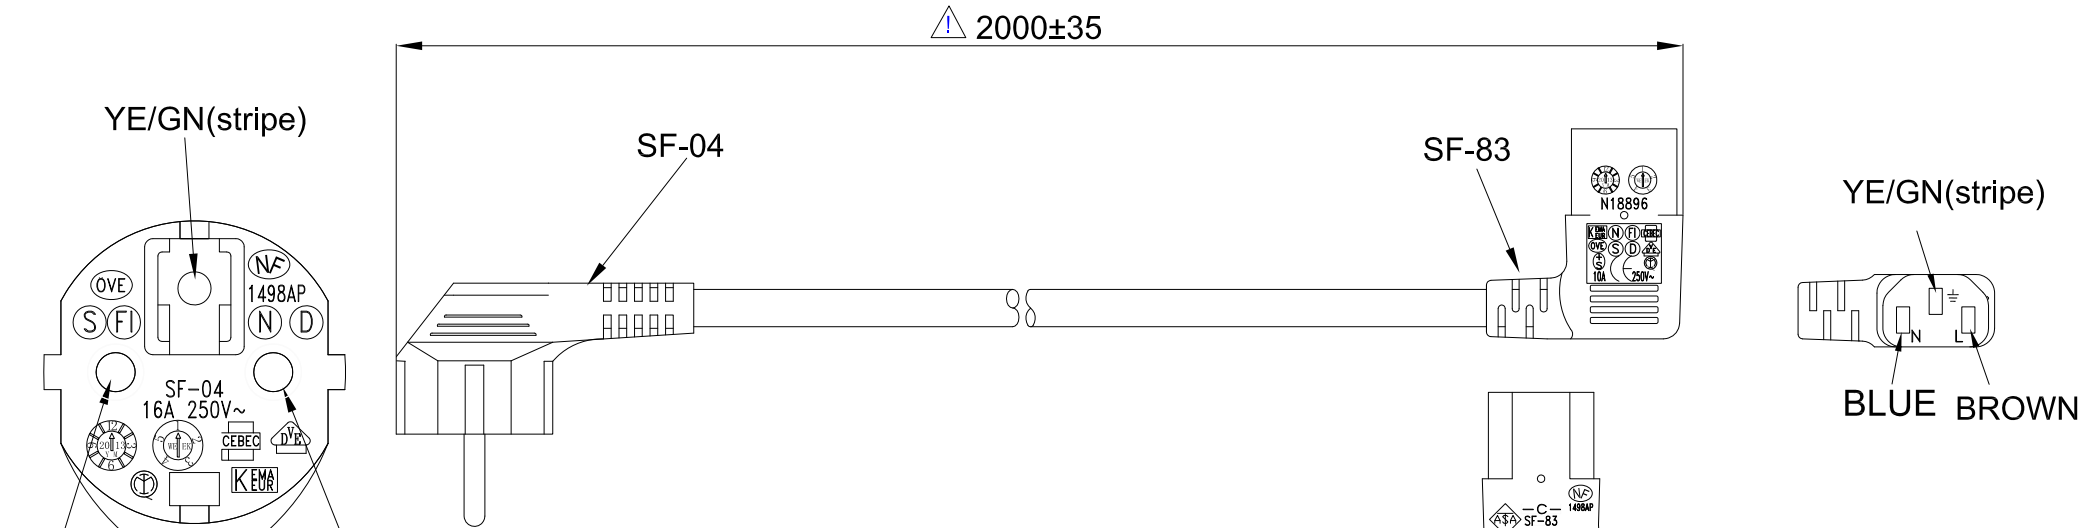

YE/GN(stripe)
BLUE BROWN

YE/GN(stripe)
BLUE BROWN

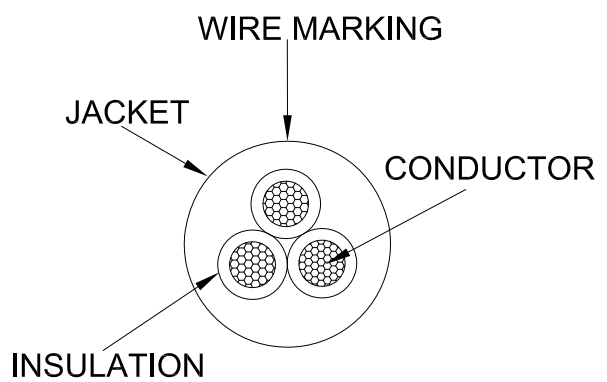

REMARKS:

1. PLUG(SF-04) RATED POWER:250V 16A
2. CONNECTOR(SF-83) RATED POWER:250V 10A
3. WIRE:H05VV-F 3G0.75MM²
RATED VOLTAGE:300/500V
4. COLOR:BLACK (RAL9011)
5. DVW TEST:2000VAC, 1S
6. POLARIZATION AND CONTINUITY TEST

| | | | | | | | |
|--------------------------------------|-----------|--|---------|-------------|---|----------|---------|
| WIRE MARKING: (Hollow) NO. 129 | | + S + S + S KEMA-KEUR CEBEC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM ² V-75 300/500V ORDINARY DUTY NSW17436 | | | | | |
| Key Size | | 3RD | | | | | |
| Length (mm) | Tolerance | | | | Part No. | AK5018 | |
| | Critical | Normal | General | | | | |
| 0-15 | ±0.05 | ±0.10 | ±1.0 | Description | SF-04+SF-83 H05VV-F 3G0.75MM ² BLACK | | |
| 15-60 | ±0.10 | ±0.20 | | UNIT | mm | APPROVAL | CHECKER |
| 60-150 | ±0.15 | ±0.35 | ±1.5 | PAGE | 1/2 | QinRao | JFL |
| 150-350 | ±0.20 | ±0.50 | | Draw.No. | | | |
| 350-1000 | ±0.40 | ±0.65 | ±2.0 | | | | |