

Page 1 of 1

DRAWN 03.12.2019 BY RKT

**AK5283** 

PC2064

**CABLE REQUIREMENTS:** 

Colour: **BLACK** 

3 Core 1.00mm<sup>2</sup> H05VV-F Type:

Complete Powerlead Rated: 10A/250V

(European Approved)

**Conductor Colour Codes:** 

Earth (Green & Yellow) Neutral (Blue)

Live (Brown

40015762

PLUG / END A REQUIREMENTS:

FREE END Type:

Colour: N/A

Rating: N/A

SG597D

Reference:

**CONNECTOR / END B REQUIREMENTS:** 

Type: SG597D

Colour: BLACK

Rating: 10A

Reference:

D/A C13 IEC Lock+ Connector

(European Approved)


## H05VV-F Cable VDE Approved -

ENEC / KEMA-KEUR -Certificate: 35-105414





Downwards Angle 90 degrees

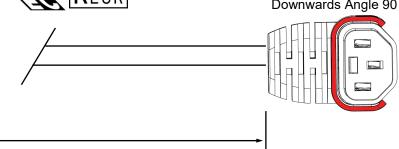

2899mm (+/-30mm)

3000mm (+/-30mm)

# Live = 50mm (+/-5mm)

Free End Overall

Strip Lengths (Includes Terminations)

Earth = 50mm (+/- 5mm) Neutral = 50mm (+/- 5mm)

### **EXTRA REQUIREMENTS:**

COMMENTS:

PACKAGING OUTER .....TBC PIN PROTECTING COVER ......NO WIRING INSTRUCTIONS ......NO PRE-SHIPMENT INSPECTION REQUIRED....NO

#### CHANGE MANAGEMENT:

**HANKING** 

**LOOSE** 

#### **TERMINATIONS / FURTHER COMMENTS:**

**NEUTRAL / BLUE** LIVE / BROWN

Type: Stripped Type: Stripped

Size: 6mm Size: 6mm **EARTH / GREEN & YELL** 

Type: Stripped

Size: 6mm