



Side:A

Side:B

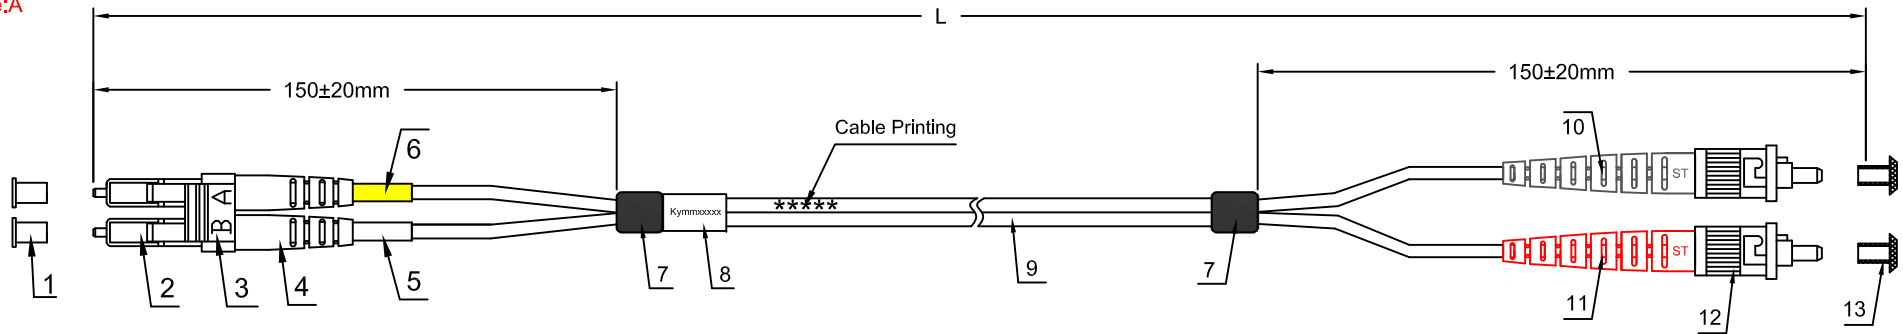

PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
SMALL	BAG TYPE	QTY	LABEL
	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL B"



DETAIL B
y: Year; mm: Month
xxxxx: Serial Number

ACT Fiber Optical Patch Cord
LC-ST 50/125 OM3 Duplex

Type nr. : RL7601
Length : 1.00m
IIC-code : 10280010-P0015643
Performance : (@23C)=850/1300+/-20nm

8715065454703

	Insertion Loss	
	850nm	1300nm
A	0.06	0.03
B	0.03	0.06
C	0.04	0.06
D	0.03	0.07

• ACT advises to clean connector ferrule before usage to get optimal performance
• Always leave the dust caps on if the cable isn't installed
• www.act-connectivity.com

Partnumber	Length	Tolerance
RL7601	1M	0/+100mm
RL7651	1.5M	0/+100mm
RL7602	2M	0/+100mm
RL7603	3M	0/+100mm
RL7605	5M	0/+100mm
RL7607	7M	0/+100mm
RL7610	10M	0/+100mm
RL7620	20M	0/+100mm

ACT RL7601

LC/UPC-ST/UPC duplex patchcord OM3 1M

IIC: 04015001-P0015774


CE UKCA

ACT is a registered trademark. All mentioned brand names are registered trademarks of their respective owners. Rights to the registered Names / Logos / Trademarks / Brands / Service Marks featured are property of and belong to their respective owners. Developed and styled in Europe, made in China. Misprints and errors reserved. ACT cannot be held liable or responsible for inaccurately presented content. ACT, Koohovenstraat 1E, 3772 MT Barneveld, The Netherlands.

We advice to clean all the connector ferrules for optimal performance. You can find safety information at www.act-connectivity.com/safety


www.act-connectivity.com

DETAIL A



DETAIL C

DETAIL D

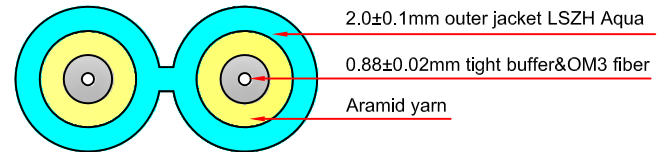

RoHS
Compliant

LC/UPC --- ST/UPC duplex (2.0±0.1)*(4.0±0.2)mm OM3 LSZH Aqua

ITEM	Description	Q'TY
1	LC dust cover white	2 PCS
2	LC/UPC MM duplex connector beige	1 PC
3	LC clip beige	1 PC
4	LC short boot white L=19,5±0.5mm	2 PCS
5	LC heat-shrink tube white	1 PC
6	LC heat-shrink tube yellow	1 PC
7	Breakout heat-shrink tube black L=15mm	2 PCS
8	Cable lable	1 PC
9	OD=(2.0±0.1)*(4.0±0.2)mm duplex OM3 fiber optical cable LSZH Aqua	1 PC
10	ST boot black	1 PC
11	ST boot red	1 PC
12	ST/UPC MM simplex connector	2 PCS
13	ST dust cover lucency	2 PCS

ACT

Designed by:		Audit:	
Date:	2021-07-21	Approve:	
Unit:	mm	Sheet:	A4
Drawing NO:	RL76xx LC/UPC-ST/UPC duplex patchcord OM3-V3		



Product Specification

Standard Compliances

1. ANSI/TIA-568.3-D.
2. ISO 11801 OM3 /IEC60793-2-10 type A1a.
3. Telcordia GR-326-CORE Issue 4 February 2010 Compliance.
4. RoHS Compliance for the Requirement of European Union Issued Directive 2011/6S/EU.
5. IEC 61754-20 Fiber optic connector interfaces -Type LC connector family
6. IEC 60794-2-20 Indoor cables-Family specification for multi-fiber optical cables
7. IEC 60794-1-2 Basic optical cable test procedures

Construction&Characteristics

Optical Performance	Insertion loss typical	0.15dB
	Insertion loss maximum	0.25dB
	Return loss	≥30dB
	Polish	UPC
Connector	Connector A side	IEC61754-20 LC connector
	Connector B side	IEC61754-2 ST connector
	Ferrule	Ceramic Zirconia (ZrO2)
Cable	Fiber class	OM3
	Fiber type	Multimode 50/125
	Cable type	(2.0±0.1)*(4.0±0.2)mm LSZH aqua
	Tensile strength	200N (short time 400N)
	Operation temp.	-20 °C to +80 °C (5 cycles)
	Vibration	10 to 55 Hz 15mm double amplitude
Marking	ACT Premium Multimode Fiber Optic Patch cable 50/125µm,OM3,LSZH xxxxM	

100% tested and approved

1. ACT advises to clean every connector ferrule before usage to get optimal performance.
2. Always leave the dust caps on if the cable isn't installed.