
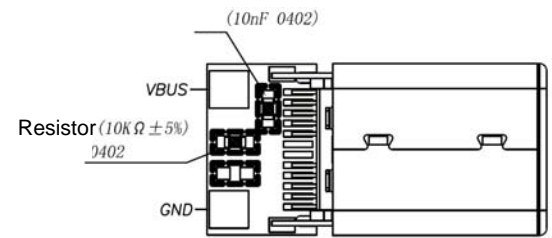


MICRO USB3.0 BM(Nickel plated)
Black molding tooling No.:642

Voltage :5V
Lod Crrnt:Max:3A

OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

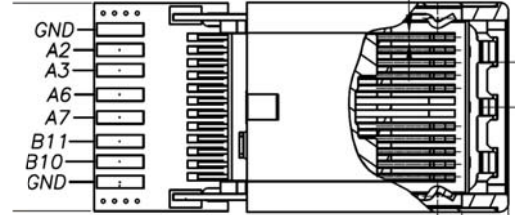

USB 3.1 CM (Nickel plated)
Black molding tooling No:1576


TOL:±0.3mm

Lod Crrnt : 2.0A(Test equipment APPLE Charger:5V/2.4A,APPLE MacBook)

CONTACTS:

P1	1	2	3	5+8	6	7	9	10	64
PCB	VBUS	A7	A6	GND	B10	B11	A3	A2	64
P2	A4+B4+A9+B9	A7	A6	A1+B1+A12+B12	B10	B11	A3	A2	64
Wire	Red	Green	White	Black	Blue	Yellow	Orange	Purple	Drain

⑥	A light adhesive stickers:50*10mm(Black words on the White background)	1PCS
⑤	PE	12g
④	45P Black PVC	25g
③	MICRO USB 3.0BM(Black insulator , Nickel plated)	1PCS
②	USB3.1 C Type(Black insulator , Nickel plated)3.0,Resistance 10KΩ,Metal Can,(Xinhan:UCC-16K346C2)	1PCS
①	UL20276 (32#*1P+D+AL+Mylar)*2+32#*1P+26#*2C+AL+B(16*5/0.10TA) OD=4.0mm Black PVC Jacket.	1PCS
No.	Description	Qty

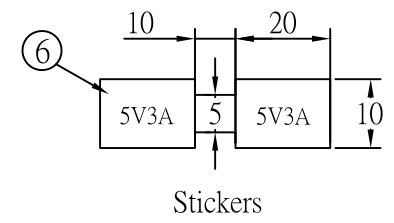

Company	Goods Code	Draw	QMQ	Date	2016.01.20		D		
ITEM NO.	SB0024	Check		Date			C		ZML 2016.01.14
Goods NO.		Approval		Date			B		ZML 2015.11.12
Original NO.	Unit(mm)						VER. A	REVISE	Date