REV	DATE	MODIFICATION	DRAWN
	25/12/09		

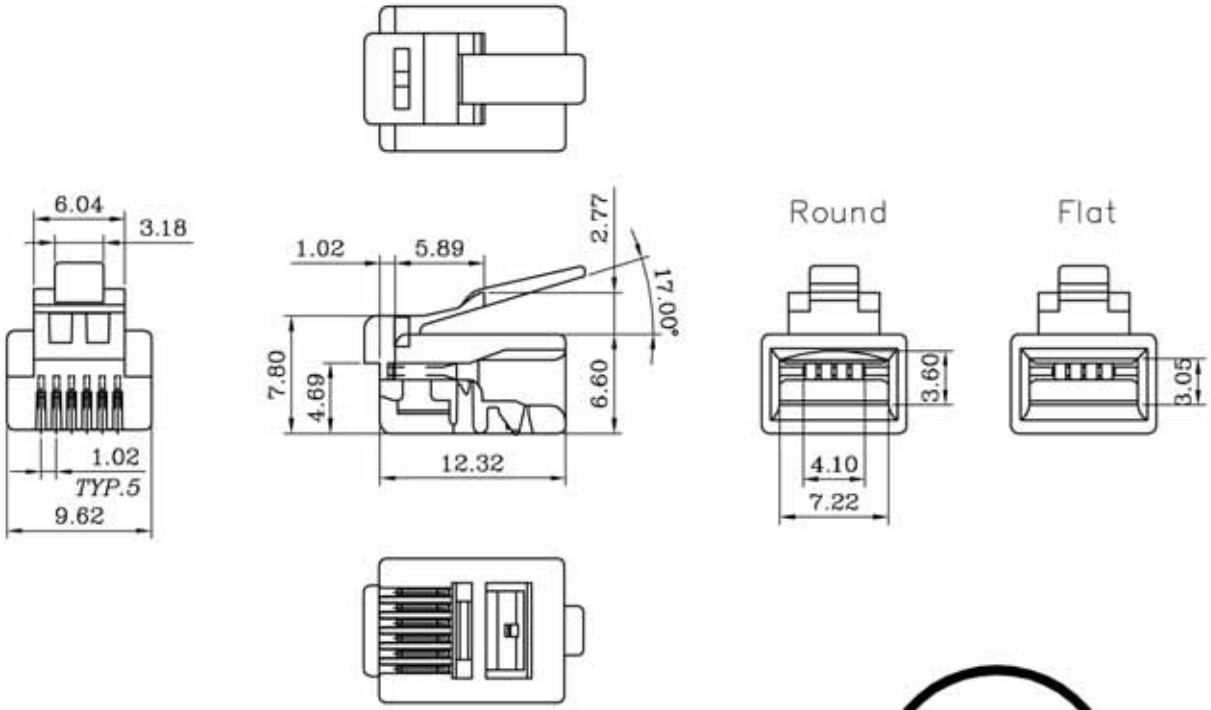

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.

DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.

INSULATION RESISTANCE: 100 M Ω .

TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.

DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-2 OR UL94V-0 .

COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.

CONTACT BLADE: COPPER ALLOY .

CONDUCTOR : STRANDED & SOLID WIRE , 24AWG, 26 AWG.

GOLD PLATING: 3u"~50u",ARE AVAILABLE.

RJ-S

RELEASED
2010 08 02
R&D

BLADE:	A				
Drawing			CABLE TYPE	ROUND	
Mark	✓		Mark	✓	
GOLD PLATING					50u"
Mark					✓

DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL PC	DWG NO. TD104M	
.X±0.20	.X°±5°	TITLE		
.XX±0.10	.XX°±2°			
APPROVAL 沈红波	CHECKED 钟均江	DRAWN LiJing	SCALE 2/1	SHEET 1/1
			PROJ.	REV A