CUSTOMER NAME	
CUSTOMER Part No.	AK5166

DATE	REV	DESCRIPTION	BY
2015. 1. 13	A/0	NEW	JFL

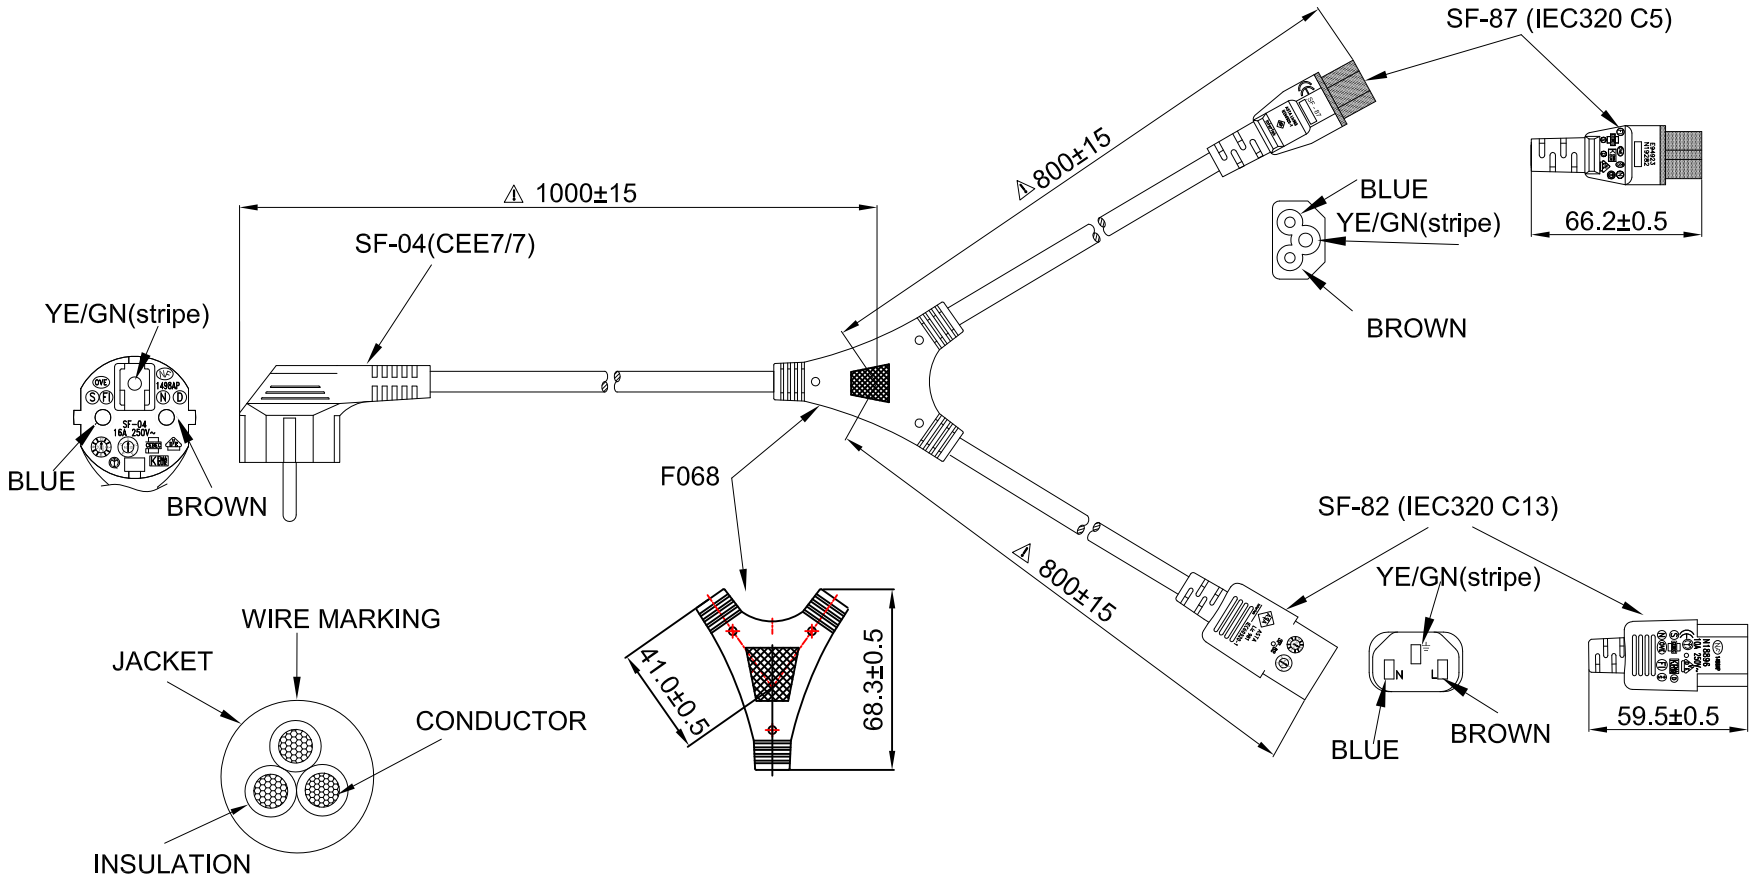

REMARKS:

1.PLUG(SF-04) RATED POWER:250V 16A
2.CONNECTOR(SF-87) RATED POWER:250V 2.5A
3.CONNECTOR(SF-82) RATED POWER:250V 10A
4.WIRE:H05VV F 3G0.75mm² RATED VOLTAGE:300V/500V & H05VV F 3G1.0mm² RATED VOLTAGE:300V/500V
5.COLOR: BK
6.DVW TEST:2000VAC,1S
7.POLARIZATION AND CONTINUITY TEST

WIRE MARKING: (Hollow) NO. 133	KEMA-KEUR CEBEC 972 VDE NF-USE 1345 IEMMEQU H05VV-F 3G1.0MM² V-75 300/500V ORDINARY DUTY NSW17436
WIRE MARKING: (Hollow) NO. 129	KEMA-KEUR CEBEC 972 VDE NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM² V-75 300/500V ORDINARY DUTY NSW17436

Key Size	⚠	3RD

Length (mm)	Tolerance		
	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	
350-1000	±0.40	±0.65	±2.0

Part No.	AK5166			
Description	SF-04+F068+SF-87+SF-82 H05VV F3X1.0mm²+F3X0.75mm² BK			
UNIT	mm	APPROVAL	CHECKER	DRAWER
PAGE	1/1		QinRao	JFL
Draw.No.				

AC20150113005