


**Remark:**

1. 100% Open/Short Test
2. Conductive Resistance: 15ohms MAX
3. Insulation Resistance: 5M ohm MIN.
4. HI-POT:DC 300V/10MS.
5. The product is RoHS compliant.
6. Dp to Dp 1.4V,working as  
8K@60Hz,4K@120Hz and 4K@60Hz

ITEM	PART	DESCRIPTION
<b>A + B</b>	Connector type	DisplayPort male to DisplayPort male
	Contacts	Gold plated
	Hood	Molded pastic
	Shield type	Aluminum Mylar
	Conductor material	Tinned copper
	Locking	Snap-in
<b>C</b>	Cable colour	Black
	Outer jacket	PVC
	Wire gauge	28 AWG
	Outer diameter	∅7.3 ±0.2mm
	Bend radius	50 mm
	Temperature rating	-20°C to +70°C (+5%)
	Max bandwidth	32.4 Gb/s
	Video signal	DisplayPort
	Version	DisplayPort 1.4
	Max. resolution @ 60Hz	7680 x 4320
	Max. resolution @ 120Hz	3840 x 2160
	Chroma sampling	4:4:4
	Color bit depth	8 bits per colour
	Power connected	No

Signal Assignment

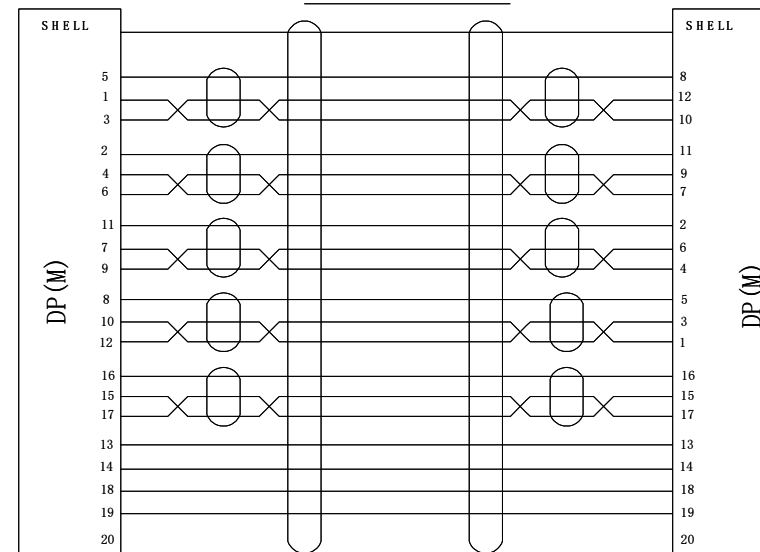

Drawn by : EP

Displayport 1.4 8K connection cable male - male, Zip Bag

Item : AC3910

Revision : 01-AA

Date : 31-01-2024

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.