

STICKER

- NOTE:
1. CABLE:UL2725,2.0VER,28#*1P+28#*2C+AL+B,OD=3.5mm,BLACK COLOR,PVC JACKET.
 2. LENGTH:1
 3. CONNECTOR:USB AM*1PCS(WHITE INSULATOR),MINI A4M*1PCS(BLACK INSULATOR)
 4. MOLD:BLACK MOLDING.
 5. CONTACTS:

USB AM	1	2	3	4	64
MINI A 4M	1 RED	2 WHITE #28	3 GREEN #28	4 BLACK	64 SHIELD



WHITE/GREEN PAIR...28AWG , RED/BLACK...28AWG

6. OPEN/SHORT TEST: 100% TEST.
 INSULATION: 5M.

RoHS Compliant

Company	IBV	Goods Code		Draw	FC001	WJF	Date	2009.05.26
ITEM NO.	SB 247X	Drawing Evidence:		Check			Date	
Goods NO.				Approval			Date	
Original NO.	S-***** Unit(mm)							

1PCS/PE BAG(0.06*190*300mm)+Sticker

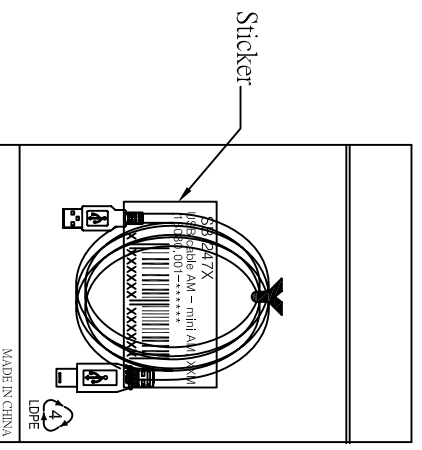

D			
C	Revised the plug Mini A 4M	10.05.03ZXXW	
B	changed Mini A 5M to Mini A 4M/ adding packaging info	10.03.15WJF	
VER. A	REVISE		Date