



### Bullets

- Solid aluminium USB-C 3.2 Gen1 to HDMI video adapter with a max. resolution of 4096 x 2160 (4K) @30Hz
- 60W Power Delivery Pass-Through port for charging your connected device
- USB-A 3.2 Gen1 data port
- Plug and play: a USB-C port with DisplayPort Alternate Mode (DP Alt Mode) is needed

### Tech specs

USB Type-C	: Yes
Cable part length	: 0.12 m
Power Delivery ports	: 1
Max. PD power	: 60 W
Power Delivery profiles	: 20.0V up to 2.75A, 15.0V up to 2.67A, 12.0V up to 2.58A, 9.0V up to 2.44A
Shielding type	: Aluminum Mylar
Conductor material	: Tinned copper
Wire gauge	: 32 AWG
Colour	: Grey
Connections	: HDMI, USB
Connections (computer)	: USB C male (x1)
Connections (display)	: HDMI A (full-size) female (x1)
Max. resolution @ 30Hz	: 3840 x 2160
Max. resolution @ 60Hz	: 1920 x 1080
4K compatible	: Yes
Video signal	: HDMI
Video specification	: HDMI High Speed
Supported features	: HDCP
USB compatibility	: USB 3.2 Gen 1 - SuperSpeed (USB 3.0)
System requirements	: USB Alternate mode
Power supply	: Bus powered

### Story

Use the USB-C 3.2 Gen1 to HDMI 4K adapter to connect a HDMI screen or beamer to a notebook. The adapter supports a maximum resolution of 4096 x 2160 (4K) @ 30Hz. The AC7022 has a Power Delivery Pass-Through port (max. 60W) and an additional USB-A port.

--->

<---


### Connect a notebook with USB-C to a monitor or beamer with HDMI

Connect a source device with USB-C to a monitor or beamer with HDMI by using the USB-C 3.2 Gen1 to HDMI adapter. The USB-C port of the source device must support DP Alt Mode. The USB-C to HDMI Adapter supports the maximum resolution of 4096 x 2160 (4K) @ 30Hz. The AC7022 has an additional USB-A data port.

### USB-C Power Delivery Pass-Through port 60W

The USB-C Pass-Through port supports power delivery 60W. The notebook is always charged with the right amount of power thanks to the pre-defined Power Delivery profiles. The charger communicates with the notebook to negotiate the most effective charging profile.

*Please make sure the USB-C port of your source device supports DP Alt Mode.*

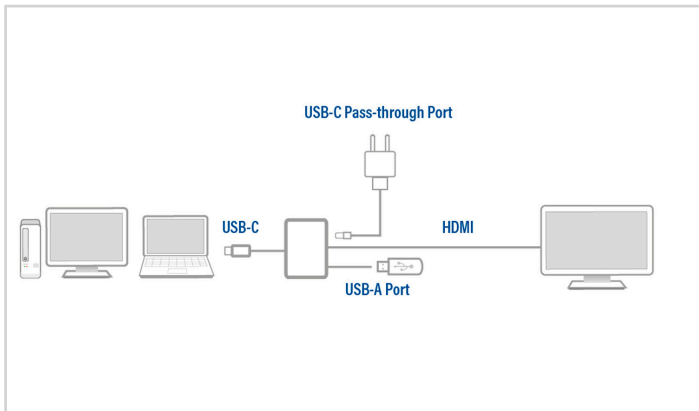

SKU	EAN	SHORT PRINT DESCRIPTION
AC7022	8716065437492	USB-C to HDMI female adapter with PD Pass-Through 60W, 4K, USB-A