ELECTRICAL TEST:

1.100% OPEN SHORT MIS WIRE TEST
2.CONTACT RESISTANCE:3 OHM MAX
3.INSULATION RESISTANCE:5M OHM MIN
4.HI-POT TEST:DC 300V/10ms
5.PASS 4K TEST

CONSUMER ITEM	LENGTH(mm)
AC7550	1800±30

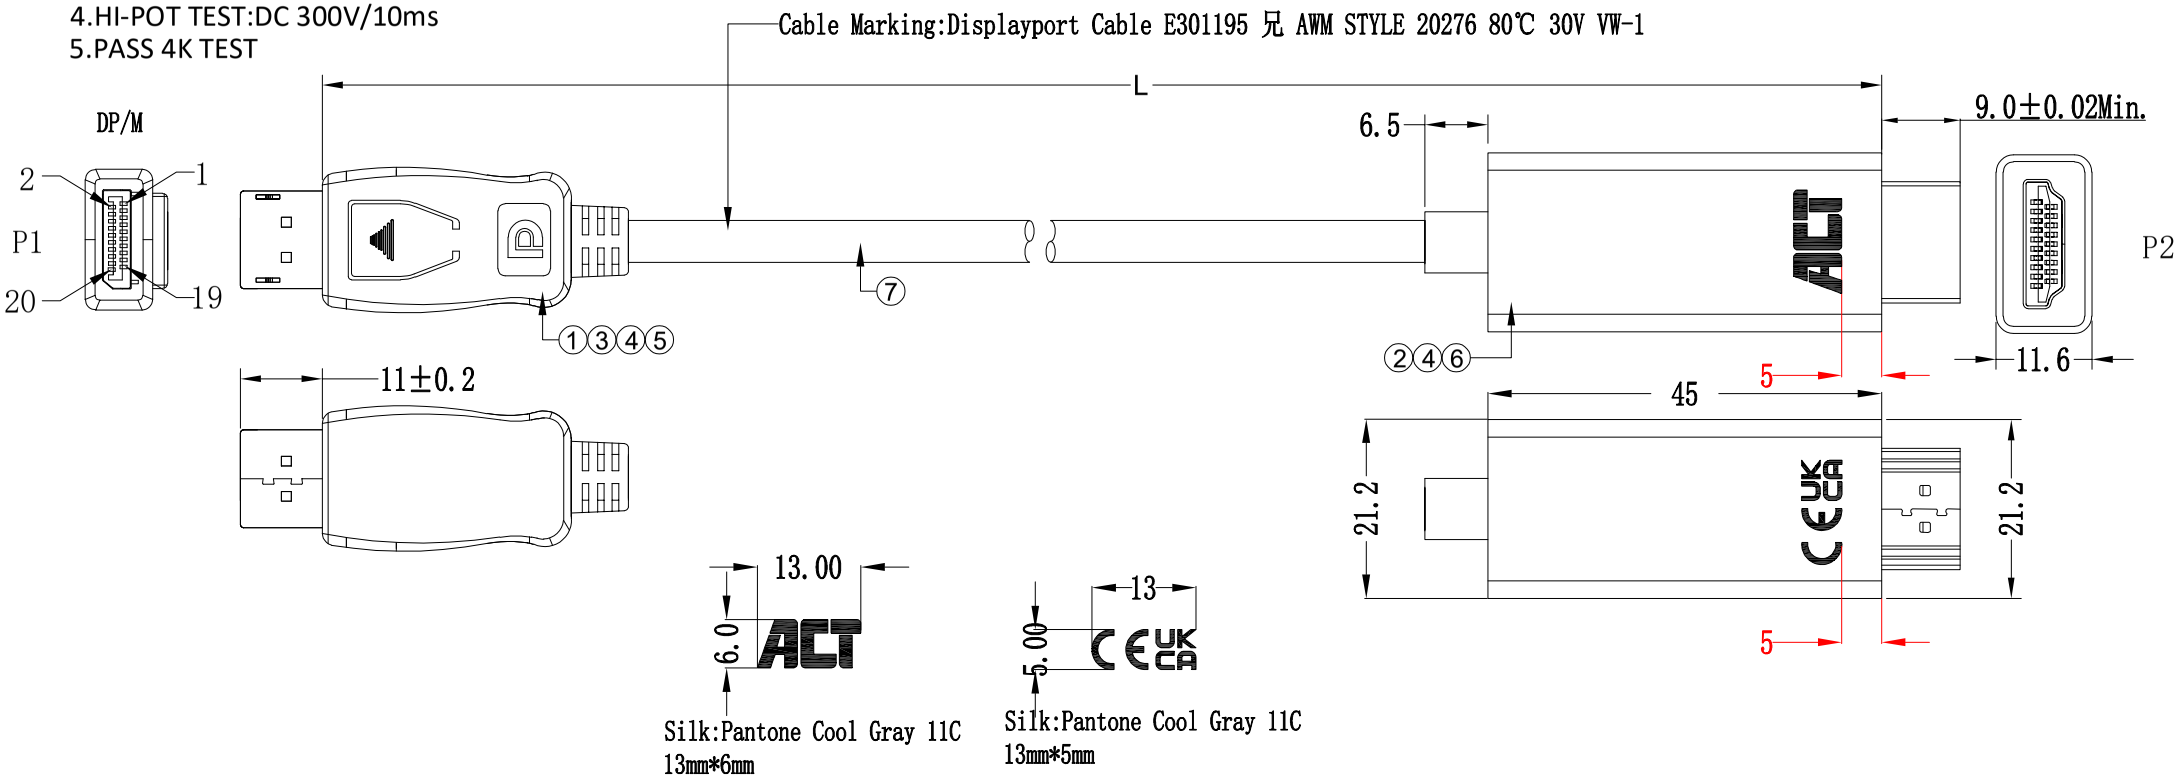

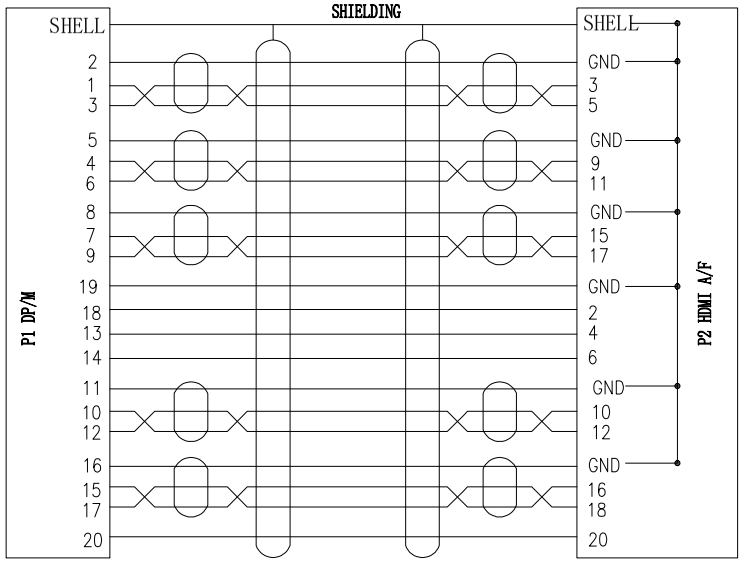

NO.	PART NAME	DESCRIPTION	UNIT
⑦	Cable	UL20276 #32*5P+#32*5C+AEB, BLACK PVC JACKET, OD:5.0mm	M
⑥	SHELL	HDMI A/M BLACK ABS SHELL	1PCS
⑤	SHELL	DP A/M BLACK ABS SHELL	1PCS
④	outer molding	BLACK PVC 45P	20g
③	inner molding	PE,Nature color	10g
②	PLUG	HDMI 19P AM,PIN:G/F, Gold plated	1PCS
①	PLUG	DP 20P AM,PIN:G/F, Gold plated	1PCS

				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
				MODEL NO.		△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.		△			
				FINISHING		△			
				MATERIAL		SYM	DATE		REVISION