





CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

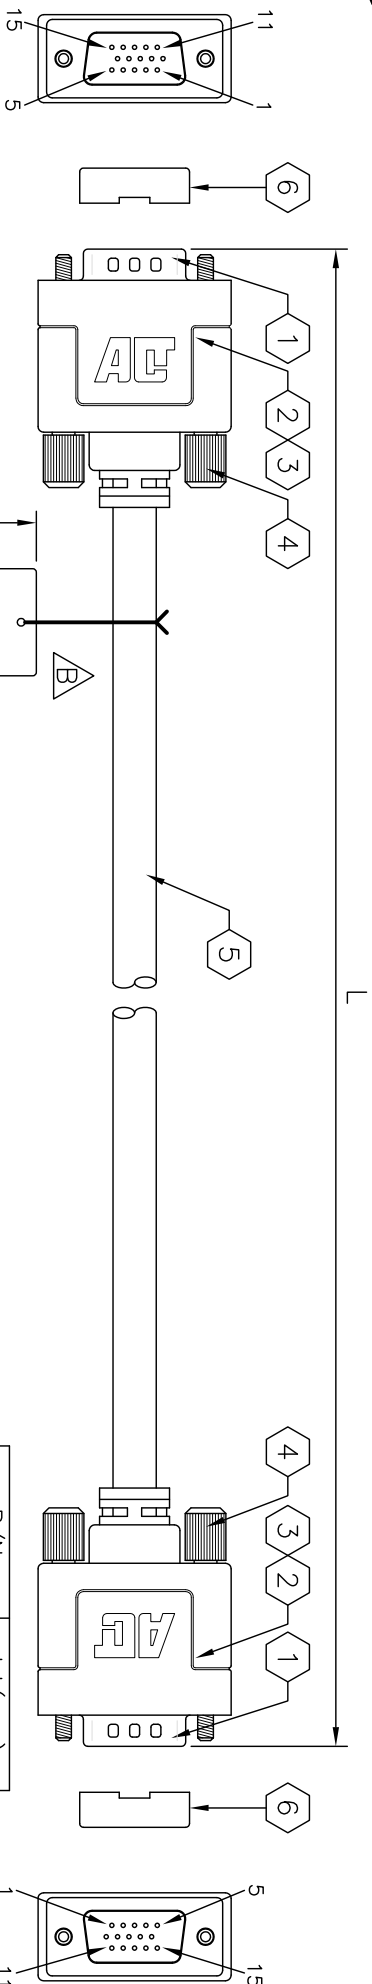

WIRE MARKING:
AWM 20276 80°C 30V VW-1
ACT Ultra High Performance cable IIC-code
LEADFREE RoHS Compliant

PINOUT CONFIGURATION

HD15 MALE	RED CEN.	1	HD15 MALE
1	GRN CEN.	2	1
2	BLUE CEN.	3	2
3	RED GND.	6	3
6	GRN GND.	7	6
7	BLUE GND.	8	7
8	WHITE	5	8
5	4,10,11	9	5
4,10,11	ORANGE	12	9
9	BROWN	13	12
12	GREEN	14	13
13	BLACK	14	14
14	YELLOW	15	15
15	SHELL	BRAID	SHELL

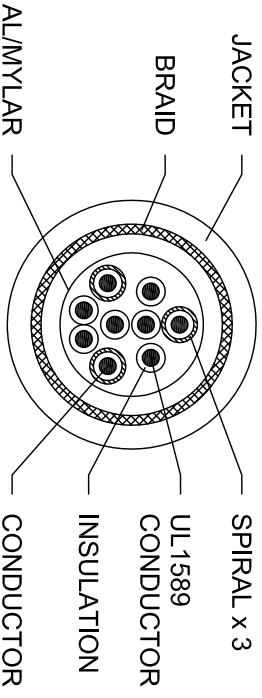

P/N	L±(mm)
AK4958	500±50
AK4959	1000±50
AK4960	1800±50
AK4963	3000±100
AK4965	5000±150
AK4967	7000±200

NOTE:
 1. EACH CABLE W/TEST REPORT CARD
 2. WIRE MARKING WITH ACT LOGO PRINTING
 3. PE BAG WITH BARCODE LABEL
 4. SMOOTH JACKET, OD=8.0mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HD15 MALE CONNECTOR	2	PCS.
2	PAT. NO.:US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS.
3	BLACK MOLDED PVC HOOD W/ACT LOGO	2	PCS.
4	BLACK #4/40 THUMBSCREW	4	PCS.
5	UL20276 (28AWG COAX+SPIRAL)x3C+(28AWG WIRE)x6C +AL/MYLAR+85% BRAID OVERALL; BLACK PVC "SMOOTH" JACKET, OD=ø8.0mm	SEE DWG.	DWG.
6	TRANSPARENT PROTECTION CAP	2	PCS.

REV.	DESCRIPTION	DATE	REVISED BY	Part Number:	Revision:
A	CHANGE WIRE MARKING	AUG.03.09	STANLEY	SEE TABLE	C
B	ADD TEST REPORT CARD	SEP.16.09	STANLEY	RFQ number:	Drawing#: 98072211C
C	ADD LENGTH 0.5M AND 1M	SEP.13.10	LILIAN	Drawn by:	Scale: None
				Checked by:	Date: 07/22/2009
				SALES:	LILIAN




ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT


CUSTOMER'S APPROVAL: *[Signature]*

DATE: Oct. 15th, 2009

FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

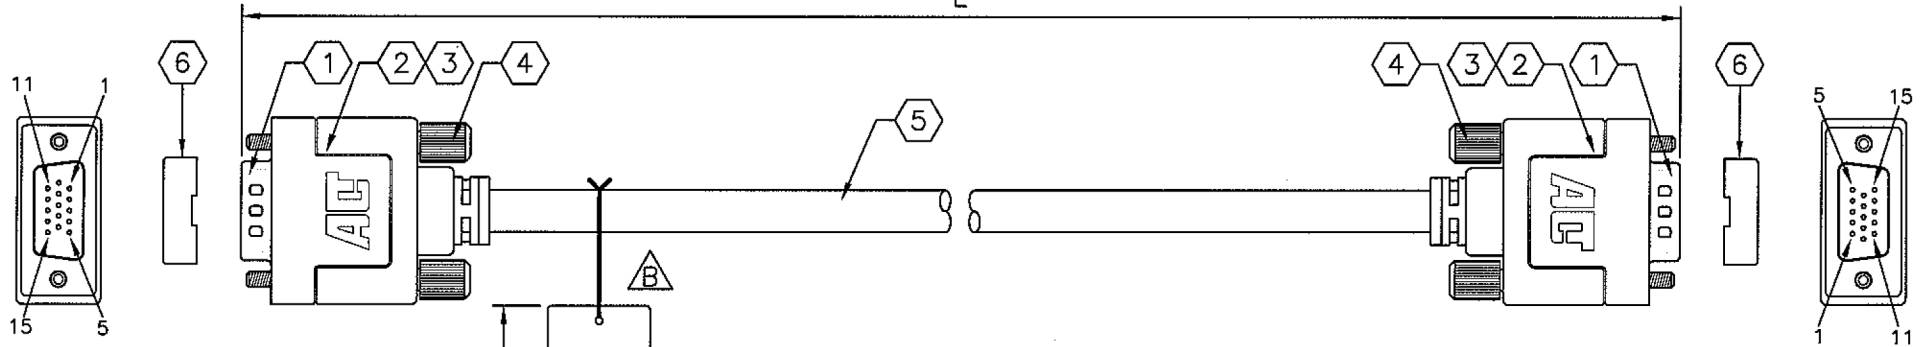

WIRE MARKING:
ACT **RU** AWM 20276 80°C 30V VW-1
 ACT Ultra High Performance cable IIC-code
 LEADFREE RoHS Compliant

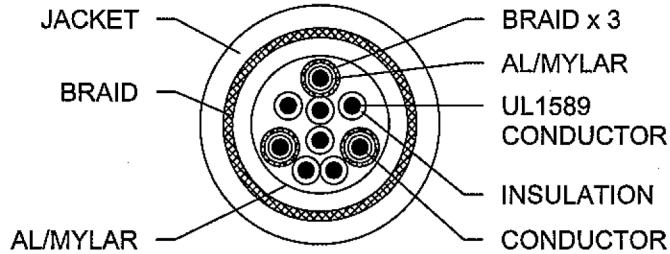

P/N	L±(mm)
AK4969	10000±250
AK4971	15000±250
AK4973	20000±250
AK4975	25000±250
AK4977	30000±250

PINOUT CONFIGURATION

HD15 MALE		HD15 MALE
1	RED CEN.	1
2	GRN CEN.	2
3	BLUE CEN.	3
6	RED GND.	6
7	GRN GND.	7
8	BLUE GND.	8
5	WHITE	5
4,10,11		4,10,11
9	ORANGE	9
12	GREEN	12
13	BROWN	13
14	BLACK	14
15	YELLOW	15
SHELL	BRAID	SHELL

- NOTE:**
1. EACH CABLE W/TEST REPORT CARD
 2. WIRE MARKING WITH ACT LOGO PRINTING
 3. PE BAG WITH BARCODE LABEL
 4. SMOOTH JACKET, OD=8.0mm
- UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HD15 MALE CONNECTOR	2	PCS.
2	PAT. NO.:US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS.
* 3	BLACK MOLDED PVC HOOD W/ACT LOGO	2	PCS.
4	BLACK #4/40 THUMBSCREW	4	PCS.
* 5	UL20276 (28AWG COAX+AL/MYLAR+65% BRAID)x3C +(28AWG WIRE)x6C+AL/MYLAR+85% BRAID OVERALL; BLACK PVC "SMOOTH" JACKET, OD=ø8.0mm	SEE	DWG.
6	TRANSPARENT PROTECTION CAP	2	PCS.

REV.	DESCRIPTION	DATE	REVISED BY
A	CHANGE WIRE MARKING	AUG.03.09	STANLEY
B	ADD TEST REPORT CARD	SEP.16.09	STANLEY

Part Number:	Revision:
SEE TABLE	B
RFQ number:	Drawing#: 98072212
Drawn by: STANLEY	Scale: None
Checked by:	Date: 07/22/2009

SALES: LILIAN